

GTY General
PROFESSIONAL



Since
2003



GENERAL AUTO TOOLS

**GENERAL
AUTO TOOLS**

Tel: +86-574-87176305 / +86-574-87176385

Mob: +86-13505749716

Skype: gtytools

Email: sale@gtytools.com

Http://www.gtytools.com

Office Add: Floor 19 No.757 Rili
Centre Road Aux Building Yinzhou Ningbo

Warehouse Add: No.51 Yuntaishan Road, Beilun
District, Ningbo

Autotools Factory Add: No. 1 Garden Road,
Fenghua Yinzhou Ningbo

20+ Years OEM: Brand, Package, Color



AUTOMOTIVE TOOLS ▶

INTRODUCTION COMPANY

General Auto Tools Ltd



ABOUT GTY TOOLS

Founded in 2003, GTY Tools is a leading integrated company specializing in the manufacturing and distribution of socket and socket set. With a comprehensive product range comprising thousands of items, our offerings include socket, socket set, ratchet handle, cabinet ect, Designed for both professional and general applications, our products are exported to over 30 countries and regions, including Germany, The UK, Spain, Poland, Russia, the US, Japan, Southeast Asia, the Middle East, and beyond.

WHY WORK WITH US

Innovation is Our Ambition

- Innovation drives our growth: 10% of annual profits are invested in R&D for new product development and existing product improvements.

Quality is Our Obsession

- At least **one year of quality guarantee** for all products.
- Compliance with **ISO** and **DIN standards**.
- Rigorous **7-step inspection process** throughout production.

Customer Satisfaction is Our Commitment

- Over 22 years of expertise in **OEM** and **ODM services**.
- **24/7 online support** for fast and clear communication.
- **50 days of free warehouse storage** for added convenience.



Three Major Advantages Of Our Company

MANUFACTURING & SUPPLYING

- Owns **3 factories** and collaborates with **21 key manufacturers**.
- A robust partnership network across China with access to over **1,000 suppliers** to meet diverse customer needs.



QUALITY CONTROL


- Independent inspection center ensuring **7-step quality checks** for every order throughout the production process.



WAREHOUSE & TRANSPORTATION

- State-of-the-art warehouse with a capacity of **200 20-ft containers**.
- **5-tier rack shelving** to ensure secure and efficient packing before shipment.
- **50 days of free storage**, offering flexibility to clients.
- Multiple transportation options: railway, highways, sea, and air freight.
- Comprehensive **door-to-door service** with custom clearance support.



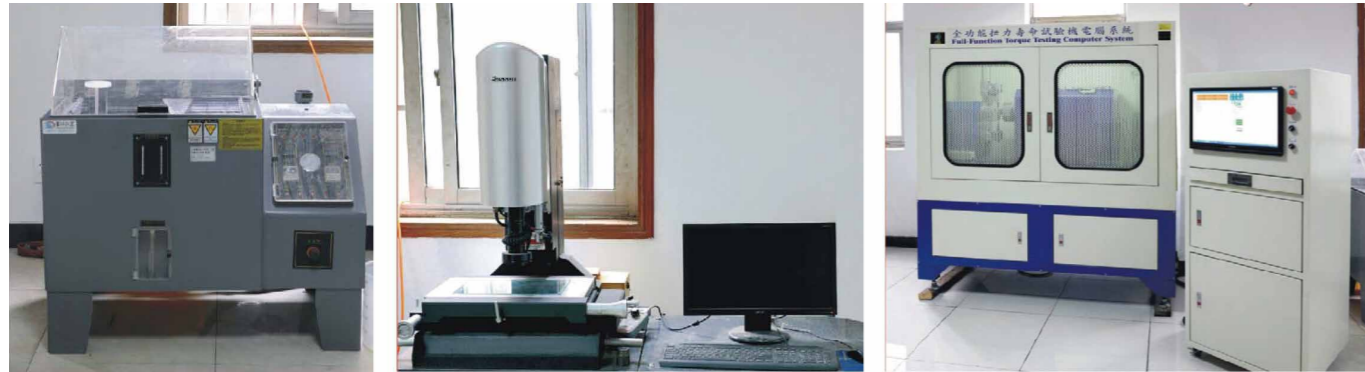


7 times inspection during the whole process of order

- Raw material
- Half-production
- Pre-sample
- During mass production
- Final Mass production
- Packing
- Before delivery

Further

invest of raw material and mould, and also provide them to our partner factory to control order

Build a new plate and finished line to our production and get FSC to keep Eco-friendly

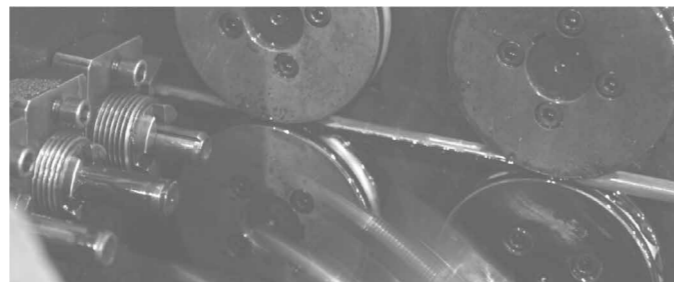

Content



Engline Tools

001-030



Under Car Tools & Brake

031-056



Diagnostic Tools

057-062



Special Pliers

063-068



Special Sockets & Wrench

069-072



Body & General Auto Use Tools

073-093



Motorcycle Tools

094



Other Repair/Maintenance Tools

095-106



Truck Specific Tools

107-126

GTY-A2501
360° Engine Borescope

1080P high-definition pixels
Bi directional 306°steering, no blind spots detected. 20000 bending times, High temperature automatic power-off protection



GTY-A2503
Engine Timing Tool Set

Used for Timing Tools for Car Repair Type
Weight 2.5KGS



GTY-A2505
Engine Timing Kit For Volvo 2.0L Diesel

Suitable for automotive repair/industrial use. Easy to use/comfortable to hold/two-way use.
High hardness/high torque/good toughness/strong and durable.
Fine surface polishing/wear and rust prevention/extended service life.
Easy to store/Easy to remove/accurate card position/easy to use.



GTY-A2507
BMW B38 B48 Engine Timing Special 3 Series 5 Series 2.0T 3.0T Timing Repair Tool

Camshaft alignment tool for BMW Mini B38 A15 A12 B48 A20 B58 engine
Compatible with various BMW and BMW Mini series and models
Includes camshaft locking tool, timing pin, chain tensioner, and crankshaft barring tool
Features camshaft intake exhaust vanos solenoid valve remove wrench and T60 cylinder head screw removal socket
Prevents belt slipping and chain wear, ensuring optimal chain tension
Includes additional tools for fuel injector removal and crankshaft oil seal removal/installation



GTY-A2502
Jeep Chrysler 3.0/3.2/3.6 Engine Timing Tool

Set of Camshaft Phaser locks and Timing Chain wedges used to hold the camshafts in position and release tension on the Timing Chain when performing service on the Camshaft Phasers, Oil Control Valves, or Timing chain.



GTY-A2504
Timekeeping Tool For 1.0 and 1.3 Engines

Timing tool for FIAT 500X and Jeep Renegade 1.0 and 1.3 engines



GTY-A2506
Mercedes-Benz M276 Timing Tool M278 M157 M152 S350 Engine Camshaft Tool

Premium Material: The engine timing tool kit is made of high quality steel, high strength, corrosion resistant, wear resistant, strong and not easy to break.



GTY-A2508
Dedicated Mercedes-Benz 1.8 2.0 Diesel Engine Timing Tool

Engine applications include: 1.6l 654.916 and 2.0l 654.920.
When modifying camshaft gears, we recommend using the split gear alignment tool to align the exhaust camshaft split gear sprocket. Note: If you do not have a proper chain separator, you will need to remove the engine.



GTY-A2509
Engine Camshaft Timing Tool For Porsche 911

Application:
For Porsche 911 (engine codes 996/997) up to 2001
For Porsche Boxster (engine codes 986/987) up to 2002.

Package Include:
1PC* TDC Alignment Pin..
1PC* Camshaft Lock.
1PC* Connecting Rod Centering Mandrel.
1PC* Piston Pin Driver and Extensions.
2Pcs* Camshaft Supports.
2Pcs* Camshaft Holding Tools.



GTY-A2511
Car Tool Set 6Pcs Engine Camshaft Alignment Timing Locking Tool Set Compatible with BMW

Camshaft Alignment Fixtures: Two camshaft alignment jigs to fix the camshafts in the TDC orientation during assembly
Crankshaft TDC Pin: Top dead center pin to align the flywheel at the TDC position
VANOS Timing Tools: Three fixtures required to time the VANOS System
Features:
Master tool set contains a comprehensive set of 6 application-specific tools that are required to be Compatible with m camshaft and VANOS timing on N63 engines.



GTY-A1007
Professional Cylinder Head Service Kit

Complete upper engine service kit enables in situ removal and replacement of worn valve springs and guides/bushings.
Suitable for 8,16, and 24 valve engines.
Set includes:
Universal valve spring compressor
Valve collet replacement tool
Valve stem seal pliers long/straight
Valve stem seal pliers long/angled
Rigid and flexible air/cylinder hoses
Valve stem seal replacement kit (5,6,7,8,10,11.5mm)



GTY-A2064
3PCS Sensor Socket Set

Installs and removes oxygen sensors and vacuum switches on most vehicles.
Material: CR-Mo steel



GTY-A2510
Ford 2.0 2.4 TDCI TDDI Engine Timing Tool

Product Details / Contents:-
Mounting / Dismounting Tool for Injection
Locking Pin Crankshaft 14mm
Locking Pin Crankshaft 14mm 10mm
Locking Pin Crankshaft 6mm (3PCS)
Locking Pin Crankshaft 1.9mm



GTY-A2512
Wheel Hub Removal Tool Kit

Function: This hub puller instantly and safely removes frozen hub assemblies without damaging the axles.
EXACT FIT: Compatible with most 5, 6 and 8 lug hub assemblies found on cars and trucks
EASY TO USE: Hub removal is simplified with the 2-5/8" center-to-center hole pattern of this wheel hub puller, making installation easy and speeding up the hub removal process
Material: The wheel hub removal tool is made of heat-treated alloy steel for high strength, corrosion and rust resistance, and durability.
Installation: Secure the drive plate to the hub using 2 washers and original lug nuts. Insert the threaded piece and force the screw against a solid surface to loosen the hub.



GTY-A1013
Valve Seal Removal & Installer Kit

Works on both valves still seated or removed.
Precision machined seal driving adapters guide the seal for proper setting. Set contains:
1-valve stem seal plier.
1-Drive handle 6"(150mm) long.
2-Deep seal driving sockets for seals O.D. 10.8-14.8mm.
7-seal driving adapters fit seals 5,5.5,6,6.6,7,8,&3/8".



GTY-A3001
Engine Timing Tool Set For Professional Engine Repair-FIAT

Installing and removal of camshaft / variable camshaft timing unit Checking and adjustment of timing.
Twin camshaft engine: 1.2 1.4 1.6 1.8 16V engine.
Diesel engine: 1.9D / TD 1.9JTD 2.4TD/JTD



GTY-A3002

Engine Timing Tool Set For Citroen&Peugeot

This Sets make the engine timing job correctly while replacing the timing belt. For most recent models with Petrol or Diesel Engine.



GTY-A3004

Engine Timing Tool Set

Installing and removal of camshaft / variable camshaft. Checking and adjustment of timing.



GTY-A3006

Engine Timing Tool Set For BMW

1.This comprehensive set of tools enables the correct timing positions to be achieved on both camshaft and crankshaft whilst replacing the timing belt or chain on both petrol and diesel engines.
2.Special wrench for controlled turning of the exhaust camshaft sprocket when removing and installing the VANOS unit.
3.Primary timing chain pre-load tool for tensioning the timing chain on M50 engines. M22 threaded for M42/M60 engines.M26 threaded for M50/M52 engines.



GTY-A3008

Engine Timing Tool Set For Ford&Mazda

Applicable for ford 1.8 D/tldtcdi diesel and 1.25_2.0 16v zetec petrol engine E.G ford fiesta, fscore /oruon,focus,puma,sierra,modeo cougar, couier/kombi,P100 and mazde 121. Designed for pulling off the camshaft timing belt wheel and locking or positioning the engine output shafts such as the camshaft and the crankshaft.. Required for changing the timing belt or for engine.



GTY-A3003

Engine Timing Tool Set

The complete set can correct timing when replacing the timing belt of petrol and diesel engine. Checking and adjustment of timing.



GTY-A3005

Engine Timing Tool Set For Ford

Installing and removal of camshaft / variable camshaft timing unit. Checking and adjustment of timing.



GTY-A3007

Timing Device For Audi/Seat/Skoda& Volkswagen Engine

This tool set is used to maintain petrol and diesel engines and replace the timing belt on many models.
Applicable:
AUDI / SEAT /SKODA AND VOLKSWAGEN , 75HP(CYLINDERS)-90HP-100HP-110HP-115HP-130HP
150HP engine timing tool set.



GTY-A3009

Diesel Engine Setting/ Locking&Injection Pump Tool Kit

Diesel 2.0 & 2.4 TDDI-TDCI (chain)
To prevent the engine shaft (e.g. camshaft, injection pumpshaft, crankshaft) to keep them in a specific position when changing a timing belt or during other engine repairs and to remove and replace the injection pump.
MODELS:MONDEO & TRANSIT (01-04)
ENGINES 2.0 & 2.4 DURATORQ 16V
CODES: FMBA/B, D5BA, ABFA, D3FA, D2FA, D4FA, F4FA.



GTY-A3010

Attrezzo Messa In Fase Tool For Camshaft Regulation-Rebault

Diesel Engines 1.5/1.9/2.2/2.5 DCI CLIO, MEGANE, SCENIC, LAGUNA, ESPACE, KANGOO, TRAFIC & MASTER(99-04).
ENGINE: 1.5, 1.9, 2.2&2.5DCI.
CODES: K9K, G9T, G9U.



GTY-A3015

Petrol Engine Twin Cam Locking Set

The kit supplied with adequate tools to lock the camshafts on twin cam (multi-valve) engines in order to stop them rotating out of timed position when the timing belt is replaced and removed. It also provides different camshaft locking pins that can cover specific crankshaft and flywheel locking applications.
Suitable for a range of vehicles including Ford, Honda, Land Rover, Rover, VW, Renault, Citroen, Peugeot, Fiat and Vauxhall/Opel.



GTY-A3017

Petrol Engine Timing Kit-OPEL&VAUXHALL 1.0 1.2 1.4

Models: Corsa, Agola, Astra,Meriva (97-04).
Engines:1.0 12v., 1.0 16v, 1.4 16v(Chain).
Codes: X10xe, Zi0xe, Z10xep,X12xe, Z12xe, Z14xep.



GTY-A3021

Camshaft Alignment Tool BMW(M47)

Includes:
Crankshaft alignment pin.
Camshaft alignment tool.
Clamp assembly for camshaft alignment tool.
2 x Tensioner locking pins.
Applications:
BMW, Land Rover, MG, Rover



GTY-A3011

Fiat&Opel Engine Timing Tool Set

This comprehensive timing tool set is designed for FIAT belt engines fitted to the very latest Vauxhall / Opel 1.3 and 1.9 CDTI models 2004 onwards.
This tools set keeps the crankshaft in place enables the correct engine timing to be made when replacing the timing belt.
Highly polished steel, hardened and tempered for maximum durability, knurled ends Professional quality.
Comes with blow mould carry case.



GTY-A3016

Engine Timing Locking Tool Set

To prevent the engine shafts (e.g. camshafts, crankshaft) from turning or to keep them in a specific position when changing a timing belt or during other engine repairs.
Applications:
Alfa Romeo twin spark 1.4, 1.6, 1.8, and 2.0L 16V twin cam petrol engines.
Engine code: 162.01, 322.01, 323.01, 323.10, 335.03, 671.06, 672.04 and 676.01 e.g. Alfa Romeo 145, 146, 147, 155, 156, 166, Spider and GTV.



GTY-A3019

JAGUAR, LAND ROVER Engine Timing Tool Set

Flywheel locking tools and camshaft timing pins
Applicable: LAND ROVER sport 2.7 TDV6, JAGUAR S-type V6 TDVi



GTY-A3022

Engine Timing Tool Set Name:VW-1.2L

1. Installing and removal of camshaft/variable camshaft timing unit.
2. Checking and adjustment of engine.
3. Applicable: Petrol engines: VW, polo, fox, skoda fabia, SEAT Ibiza/cordoba 1.2L engine, 2 and 3 cylinder, 6/12V .



GTY-A3023

**Engine Timing Set
LAND ROVER**

New Edc Manual Transmission Timing Pin
200 Tdi 300 Tdi & 2.5 Diesel Engines
Combined Crankshaft Damper Puller And Fuel
Pump Gear Locking Tool



GTY-A3025

**Engine Timing Tool Set-
Renault**

1. This new camshaft pulley setting tool holds two
pulleys in place while changing the cam belt and
correct engine timing to be performed when
changing the timing belt.
2. Applicable:Renault 16V & K4J,K4M & F4P,F4R .



GTY-A3027

**Mini Engine Timing Tool
Set**

FOR BMW MIN ONE/COOPER/COOPERS.
Includes:
Camshaft sprocket holding tool.
Engine support bracket.
Tensioner assembly tool.



GTY-A3031

**Petrol Engine Setting/
Locking Kit-Fiat 1.2
16v-Belt Drive**

Kit contains piston positioning and camshaft
setting tools to successfully time the engine.
Also includes timing belt tensioner adjuster.
Applications:Fiat,Brava,Bravo,Punto,Stilo(98-07).
Engine Codes:176B9.000,182B2.000,188A5.000.



GTY-A3024

**Engine Timing Tool Set-
Ford&Mazda**

Detailed Specification:
1. This comprehensive set of tools enables the
correct engine timing to be made when
replacing the timing belt.
2. Applicable:FORD & MAZDA .



GTY-A3026

**Engine Timing Tool Kit-
Renault**

Installing and removal of camshaft/variable
camshaft timing unit.
Checking and adjustment of timing.
Petrol engine:Twin camshaft engine:
1.2,1.4,1.6,1.8,2.0 16V,2.5 20V.
Diesel engine:1.9D/TD/dTi,2.2D/
TD,2.5D,2.8dTi,
1.5dCi,1.9dCi,2.2dCi,2.5dCi.



GTY-A3028

**Camshaft/Crankshaft
Alignment Tool Engine
Timing Tool**

For alignment of the cam and crankshafts.
Also enables correct stallation of the camshafts
with the cam cover.
This tool is used for the alignment of the camshafts.
Twin cam motors through 2006.May also be used to
align the camshafts with the cam cover.
Applicable:VOLVO models 850,960,S40,S70 and S90.



GTY-A3032

**Engine Timing Tool Kit-
TOYOTA,MITSUBISHI**

For Toyota, Mitsubishi .
Important kit when working on the motor,
e.g.. timing belt, general motor settings, camshafts.



GTY-A3033

**New Professional Master
Petrol Diesel Engine Timing
Tool Set For VW Audi VAG**

This tool set is for petrol and die-sel engine
service includes timing belt replacement on
various vehicles. It can be used for changing
the timing belt, crank and camshaft locking tool
for the professional repair of VAG engines.



GTY-A3036

**VW&AUDI Timing
Tool Set**

To check and adjust camshaft timing.
Required when replacing timing belts or timing
chains or during engine repairs.
Applicable for:
VW Polo,Golf,Golf Plus,Touran,Canddy,SKODA,
OCATVIA,AUDI A3 and VW,AUDI
(1.4L and 1.6L FSI,TSI) etc.



GTY-A3039

**Engine Timing Tool Set For
ALFA ROMEO/FIAT/LANCIA**

Applicable:
Alfa Romeo - 1.4/ 1.6 / 1.8 / 2.0 / 3.0L. 4- and
6-cylinder engine.
Alfa Romeo - 145,146,147,155,156,164,166,
GTA,GTV,Spider GT and Fiat / Lancia vehicle
with 1.2 / 1.4 / 1.6 / 1.8 / 2.0L 4- and 5-cylinder
engine.
Fiat Panda,Punto,Palio,Siena,Bravo,Brava,
Stilo,Marea,Multipia.
Barchetta,Coupe,Lancia Dedra,Delta,Kappa,
Lydra.



GTY-A3041

**BENZ(M271)Alignment
Tool Kit**

This retaining device makes it possible to position
the camshafts in the installed position.
Retainer to draw in the timing chain.
To retain timing chain with camshaft sprockets in mesh.
Applicable: BENZ M271



GTY-A3035

**Engine Timing Tool Set-
Opel&GM**

Models: Astra vectra vx220 zafira&signum(00-04)
explanation: Retains position of coolant pump
sprocket during replacement of pump,maintaining
engine timing
Codes: K9k,G9t,G9u



GTY-A3037

**Diesel Engine Locking
Tool Set**

Applicable:
Renault: Clic,megane,scenic,lanuna,espace,
kangoo,trafic,master (99-04).
Nissan:Micro,kubistar,primastar,interstar.
Opel:Vivaro ,movano.
Engine:1.5,1.9, 2.2,2.5dci. (K9k,K9q,G9t, G9u)
To prevent the engine shafts (camshaft,crankshaft)
from turning belt tensioner when changing a timing
belt or during other engine repairs.



GTY-A3040

**Diesel Fuel Pump
Timing Set**

This precision measuring instrument is designed
for resetting the timing position on diesel engines
with the following fuel pumps: BOSCH/EP/ VE
ROTARY, KIKKI, NIPPON, DENSO,
CAV ROTODIESEL, top entry these fuel pumps
will be bound on the following vehicles with diesel
engines.



GTY-A3042

**BMW(N52)Timing
Tools Set**

Special design to locate camshaft in TDC position.
Applicable: BMW N51, N52 engines
Engine N53, N54



GTY-A3044

Engine Timing Tool Set For Professional Engine Repair BMW N42/N46/N46T

For adjustment and arresting of the twin camshaft on petrol engines:
 Engine timing : checking and adjustment.
 VANOS unit : removal , installation and alignment.
 Easily accessible operating instructions including cross references to original part numbers.
 Spare parts optionally available.
 Clear arrangement of tools in high-quality plastic case with soft foam insert
 BMW: E87 118i/120i-N46 engine
 E46 316i/316ti/318ti-N42 engine
 E90/E91 318i/320i-N46 engine
 E85 Z4,2,0i-N46 engine



GTY-A3046

Petrol Engine Setting/ Locking Kit-Fiat 1.2 16v-Belt Driver

Petrol Setting / Locking Tool Kit FLAT 8V
 1. For FLTA 8VC.
 2. Checking and adjustment of timing.



GTY-A3050

Diesel Engine Setting Locking Kit-Ford-Belt Drive

Suitable for Ford 1.6 and 1.8 diesel engines as fitted to Fiesta,Escort,Orion,P100,Sierra,Mondeo, Transit 2.5Di(85on) and Galaxy 1.9TD.
 Applications:
 Ford;Fiesta 1.6/1.8(85on),Escort 1.6/1.8(85on), Focus 1.6,Galaxy 1.9TD,Mondeo 1.8, Transit 2.5Di(85on).



GTY-A3052

Petrol Engine Timing Kit-Citroen Peugeot 1.8 2.0-Belt Drive

Essential tools for timing belt replacement on 1.8 and 2.0 petrol 'EW code' engines.
 Features flywheel/drive plate,tensioner pulley adjuster and tensioner locking tool.
 Many of the timing pins are also suitable for other petrol/diesel PSA engines.
 Applications:
 Citroen;Xsara 2.0 16v,c51.8/2.0/HPI,Xsara Picasso 1.8/2.0 16v (02-05),Peugeot;406 1.8 16v (00-04),807 2.0 16v(02-05), codes:6FZ(EW7J4),FRN(EW10J4/L4/5),RLZ(EW10D).



GTY-A3045

Engine Timing Tool Set For BMW

Engine codes:
 -M40,M43
 -M42,M44,M50,M52,M54,M56 (engines with double camshafts).
 Suitable for followings.
 Models:BMW:3,5,7,X3,X5,Z3,Z4
 Type series E30-31-32-34-36-38-42-46-53-60-61-65-66-83-85.



GTY-A3049

Diesel Engine Timing Kit-Vauxhall/Opel&Suzuki 1.3 CDTi/D/DDiS-Chain Drive

Suitable for setting the camshaft and crankshaft,on Vauxhall/Opel and Suzuki chain drive 1.3 diesel engines.
 Set also includes a tensioner locking pin.
 Applications:
 Vauxhall/Opel;Agila/Corsa/Combo(03-08), Astra-H(05-08),Meriva/Tigra-B(04-08),Suzuki;Ignis/Wagon R(03-08),Swift(04-08)
 Engine codes:Z13DT,Z13DTH,Z13DTJ.



GTY-A3051

Engine Timing Tool Diesel Engine Setting&Locking Tool Kit

Diesel engine setting/locking kit - alfa romeo 1.9 8/16v, 2.4 10/20v jtd - belt drive.
 Suitable for setting and locking alfa romeo and fiat 1.9 and 2.4jtd including 16v and 20v variants.includes flywheel holding tool to remove/install crankshaft pulley, crankshaft locking tool and camshaft setting tools.
 Applications: Alfa romeo; 145, 146, 147, 156, 159, 166, gt. Fiat; brava/bravo, doblo/cargo, grande punto, marea, marea weekend, multipla, punto, stilo.



GTY-A3053

3pc Glow Plug Puller and Reamer Kit Set

Includes 3pcs of tool for:
 1.For pre-heater plugs with 10mm across flats on Mercedes CDI engines (OM611, 612, 613 etc).
 For pulling out pre-heater plugs after have been unscrewed but are still located firmly in their holes.
 Length: 135mm, Drive: 19mm hex.
 2.For Mercedes 4-Valve-engies OM604, OM605, OM606 with glow plug threads Size: M12 x 1.25.
 Drive: 13mm hex Glow plug:
 7mm.3.For Mercedes CDI engines 4.5 & 6 cylinder OM611, 612, 613 with glow plug threads M10 x 1.
 Drive: 10mm hex, Glow plug: 6mm.



GTY-A3055

Camshaft Alignment Tool-VW,Audi

1. Special designed to set camshaft in the correct position.
 2.Applicable:
 VW:Passat(98-04)
 AUDI:A4,A6,A8,A11 road(97-04)



GTY-A3058

Diesel Engine Timing Kit-Vauxhall/Opel&Saab-Chain Drive

Diesel timing kit for EcoTec engines fitted in vauxhall/opel and saab vehicles.
 Additionally the kit contains a camshaft sprocket holding assembly.
 Applications:
 Vauxhall/Opel;Astra-G(98-06),Vectra-B(97-02), Vectra-B(02-06),Signum(03-06),Omega-B(98-03), Zafra-A(99-05),Sintra(98-99),Frontera-B(98-04), Saab;9-3(98-04),9-5(02-06)



GTY-A3060

Diesel Engine Timing Removal Kit

Diesel Engine Timing/Pump Removal Kit- BMW, Land Rover, Vauxhall/Opel - 1.7D, 2.5D Turbo - M41, M51 - Chain Drive.
 Comprehensive kit designed for setting camshaft and crankshaft timing position.
 Suitable for 1.7D & 2.5D Turbo chain drive diesel engines.
 Timing chain compression lever and locking pins, injection pump sprocket retainer and lever, plus crankshaft holding tool are also included.



GTY-A3062

Camshaft Alignment Tool Set For Audi/VW Engine Timing

Camshaft alignment tool to align and hold the camshaft.
 Applications: VW polo Diesel, AUDI 100 since 1991,A6 with engine Z15L TDI Locking Pin to fix the crankshaft angle and correct timing adjustment.
 Size:12mm.
 Applications:V6,V8 engine



GTY-A3057

Diesel Engine Timing Kit-FORD-Chain Drive

Essential tools for timing 1.8TDDI/TDCi chain drive diesel engines fitted to ford vehicles. features injection high pressure fuel sprocket removal and timing chain cover alignment tools.



GTY-A3059

Petrol Engine Setting Kit-Saab&Vauxhall Opel v6-Belt Drive

Suitable for locking engine and checking timing marks on V6 EcoTec multi-valve engines. Maintains crankshaft gear and camshaft sprockets at TDC position for cam-belt work. Features a belt guide roller adjuster



GTY-A3061

Engine Timing Tool Set For FORD

Installing and removal of camshaft/ variable camshaft timing unit.
 Checking and adjustment of timing.
 Applicable:FORD Focus/Cmax 1.6 Ti-VCT 2003 later,2.0 Tdci.
 Engine code: HXDA,G6DA,G6DB,G6DC 2003 later.



GTY-A3063

5PCS Camshaft Alignment Set

5PCS Camshaft Alignment Tool Set For VW AUDI 3.0



GTY-A3064

VW,AUDI Timing Tool Set(2.0FSI)

With camshaft tools, chain tensioner retainer, locking pins and tensioner bolt
For 2.0 FSI petrol engines since 2003.
Applicable:
Audi: A3 2.0 FSI and FSI SOHC
Engine codes: AWA, BHD, BMB
VW: Golf 2.0 FSI , 2.0 FSI SOHC and Touran 2.0 FSI SOHC
Engine codes: AWA, AXW



GTY-A3080

Camshaft Locking Tool W/Steel Plate

Contents:Injection pump locking pin, tensioner locking tool,crankshaft locking tool.
For use on AUDI,VOLKSWAGEN,SEAT, SKODA with TDI PD and V6 engine.



GTY-A3082

Camshaft Alignment Tool Set For VW/Audi 1.4 1.6

It is convenient for working and fixing on crankshaft and making crankshaft fix.
Applicable:VW/Audi 1.4 / 1.6l Petrol Engines. VW Lupo, Polo, Golf Iv, Bora /Audi A2



GTY-A3084

Engine Timing Tool Set-VW&AUDI

Engine Timing Tools-VW&Audi.
Applicable:Vw-audi 2.5 tdi V6 and audi A 8 3.3 tdi V8 engine.
Audi V6 petrol and V6/V8 diesel engine.
A:fixing gauge for camshaft.
B:locking pin for crankshaft.



GTY-A3066

Camshaft Alignment Tool-BMW

Special design for correcting timing to be made when servicing BMW M47,M57.
Applicable:BMW M47,M57 diesel engines.



GTY-A3081

Engine Timing Tool Set-VAG 2.0TDI PD

The timing tool set is for VAG 2.0 TDI PD DOHC engines fitted to Audi A4, A6, Skoda Octavia II and Volkswagen Golf / Golf Plus / Jetta and Tiuran models.



GTY-A3083

Belt Tension Adjuster Tool For VW/Audi Engine Tool

Timing Tool set for:
VW - Polo
Seat - Ibiza, Cordoba
Skoda - Fabia
Engine Codes:
1.2 - 12v 3 cylinder (AZQ & BME) from 2002 onwards



GTY-A3085

Belt Tension Adjuster Tool For VW/Audi Engine Tool


Special angle designed to adjust the belt tension on the free roller.
Applicable: VW. AUDI.



GTY-A7014

Universal Twin/4CAM Lock

Special designed to lock twin camshafts timing marks during timing belt replacement.
Fit onto sprockets and lock into the teeth.
Adjustable arms to fit various diameters and tooth pitch.
Also suitable for locking between cam and diesel injection pump sprockets
On a man operation.
Applicable: Petrol & Diesel engines.



GTY-NA1017

5Pcs V-Belt and Timing Belt Wrench Set

13mm,15mm,16mm,17mm,19mm; length:460mm.
With slip guard handle for easy handling.
12 point finish.
45°offset ends allow you to reach all areas in the engine bay.



GTY-NA1031

BMW Timing Tool Set For Professional Engine Repair

Installing and removal of inlet camshaft and carrier assembly / valvetronic system.
Checking and adjustment of timing.
Applicable:E87:118i/120i-N46
E46:316i/316ti/318i-N42
E90/E91:318i/320i-N46
E85:Z4,2.0L-N46
This set needs to use with GTY-A3044



GTY-NA1033

BMW Camshaft Alignment Tool(N62/N73)

Applicable: BMW engine models N62 & N73.
Use the tool to fix on the input/output crankshaft to adjust the interval of crankshaft.
It could check the crankshaft interval (smaller than 0.5mm).
Contents: FixtureA for input crankshaft x 1
FixtureB for output crankshaft x 1
Support with screw x 1



GTY-B1067

Universal Tensioning Gauge For Cam Belts

It can be used to adjust the tension on the cam belt where the movement of timing belt is measured by load(NM).
Suitable for using on cam belts various belt widths.
Easy to use.
Clear incremental marking with knurled knob for precise measurement.
Dual scale allows reading from top or bottom of tool.



GTY-NA1030

BMW Camshaft Alignment Tool(M52TU,M54,M56)

To fix on the camshaft
Special design for using before installing the accurate engine.
Applicable:BMW engine models M52TU, M54, M56.



GTY-NA1032

VW,AUDI Timing Tool Set(3.2FSI)

Special designed set of tools for alignment camshaft locking, and adjusting.
Applicable:
VAG A4/ A6/ A8 3.2 FSI with engine AUK,
A6L/ Quattro 2.4 with engine BDW



GTY-NA1034

BMW Secondary Chain Tensioner Locking Tool Set(M62)

For fixing the camshaft chain tensioner.
Applicable:BMW M60, M62 (VANOS)



GTY-NA1035

VW Water Pump Removal Tool Kit

Special designed to remove the water pump. Loosen the exhaust pipe and starter catalytic converter from the Turbo Charger and Gearbox for engine BAC & BLK. Remove exhaust gas recirculation cooler and particulate filter for engine BDP and BPE. Applicable: Volkswagen T5 & Touareg 2.5D. Engine Codes: BAC, BLK, BPD, BPE



GTY-NA1037

BMW Mini Timing Tool (N12,N14)

The kit designed to set the twin camshaft on petrol engine of BMW MINI. Applicable: BMW MINI COOPER 1.4, 1.6, 16V(N12,N14) CITROEN C4, C4 Picasso PEUGEOT 207, 308.



GTY-NA1039

Engine Timing Tool Set For VAG2.4&3.2FSI

For checking and adjusting the engine timing. Suitable for Audi V6,v8 and V10 engines with chain.



GTY-NA1041

VW Diesel Engine Timing Tool Set-Belt

Special designed set of tools for camshaft locking, and adjusting. Applicable:VW-Transporter, LT, Crafter Engines:2.4D, 2.5SDI, 2.5TDI, 2.5TDI Common Rail



GTY-NA1036

VW Diesel Engine Timing Tool Set-Chain

For removing and installing camshaft drive gear and eliminating play in gear train - for locking of both camshafts and crankshaft. Applicable: VW T5 Touareg and Transporter 2.5 TDI PD and 4.9D / TDI models. Engine codes:BAC, BLK, BPD, AXD, AXE, BLJ, BPC, and AYH



GTY-NA1037B

BMW Mini Cooper Camshaft Alignment Timing Tool Kit

Compatible with BMW Mini Cooper N12 N13 N14 N16 N18 engine, for Citroen Peugeot 1.4 1.6 V16 petrol. OEM Equivalent Part Number: 117 440, 119 340, 119 590, 196 709, ect. Engine Code: N13 B16A, N18 B16A, N18 B16C, N18, B16A/MO, N18 B16C/TO. Operation:For example, BMW Mini Cooper S 1.6T



GTY-NA1040

Engine Timing Tool Set For VAG2.7&3.0TDI

Suitable for Audi A4,A5,A6,AB,Q5,Q7 and VW Touareg, Phaeton with engine codes: ASB,BKN,BKS,BMK,BMZ,BNG,BPP,BSG,BUG, BUN,CAMA,CAMB,CANA,CANB,CANC,CAND, CAPA,CARA,CARB,CASA,CASB,CASC,CATA, CCMA,CCMA,CCWA,CCWB,CDYA,CDYB,CDYC, CEXA,CGKA,CGKB. For locking the camshaft,crankshaft and fixing the chain tensioner.



GTY-NA1042

13PCS Diesel and Petrol Engine Timing Kit

For use on Audi,Citro<OEB>N,Peugeot,Volkswagen and Volvo Petrol and diesel engined cars and light commercial vehicles.



GTY-NA1049

Petrol Engine Setting/ Locking Kit

Includes tools for setting and locking camshafts plus tools for setting timing chain tension. Applications:BWN M40, M42, M50,M60,M62,M70 engines.



GTY-NA1051

Timing Belt Double Pin Wrenches Tools Set-VW-AUDI

For use on:Lupo,Polo 1.4 Tdi PD Golf, Bora, Polo 1.9 Tdi PD Beetle, Sharan 1.9 Tdi PD Passat 1.9 Tdi PD Audi A2/A3 1.4/1.9 Tdi PDA4/A6 1.9 Tdi A4/A6/A8 ALLROAD 2.5 V6 Tdi



GTY-NA1141

Timing Chain Fitting Tool Set For Mercedes Benz M651 Engines Locking/Alignment

Applications - Mercedes-Benz A,B,C,CLA,CLS,E,GLK,M,S,SLK,Sprinter, Viano and Vito with the 2.1CDi engine. Engine Range - 180 CDI, 200 CDI, 220CDi, 250CDi, 210CDi, 310CDi, 510CDi, 213CDi, 313CDi, 216CDi, 316CDi, 416CDi, 2.0CDi, 2.2CDi, 110CDi, 113CDi, 116CDi, 250 and 300 Blue TEC



GTY-A3038

Engine Timing Tool Set

For FIAT/ALFA ROMEO/LANCIA.



GTY-NA1050

Diesel Engine Timing Kit-Chrysler-LDV

Contains camshaft, crankshaft and balance shaft pins, puls tensioner adjuster. Application: Chrysler (Voyager/Grand Voyager/Jeep Cherokee(01-08). LDV(05-08).



GTY-NA1140

Engine Timing Tool Set

For Renault, Volvo, Ford 16V, 20V Petrol Engines. contains important tools for adjusting the engine timing1.6 - 1.8 - 1.9 - 2.0 - 2.3 - 2.4 - 2.5 I DOHC engines



GTY-A3014

Timing Locking Set-Aluminum

A:vauxhall/opel:astra G 1.7 Td Astra-g2.0 16v Vectra 1.8/2.0 16v<95B:vauxhall/opel:astra G 1.4/1.6/1.8 16v<94 Vectra 1.6/1.8 16v Zafira 1.6/1.8 16v C: Right Hand Camshaft: Saab:900.9000 Vauxhall/opel: Calibra 2.5/2.5i/2.6 V6 Cavalier 2.5i V6 Omega-b2.5/2.6/3.0/3.2 V6 Sintra 3.0 V6 Vectra-a2.5/25i/2.6 V6 D:Left Hand Camshaft: Saab:900.9000 Vaushall/opel: Calibra 2.512.5i/2.6 V6 Cavalier 2.5i V6 Omega-b 2.5/2.6/3.0/3.2 V6Sintra 3.0 V6 Vectra-a2.5/25i/2.6 V6 E: Rover:25 1.411.6/1.8/vvc.45 1.4/1.611.8 75 1.8.200 Vi.214 16v 21616v/cabrio/coupe 218 Coupe.414 16v.416 16v/tourer Brm 1.8vvc.Metro Gti/gta 16v Mgf 1.8vvc. Most Models



GTY-A1030

Special Tool For Santana, Jieda and Audi Cars

1.Special Tool For SANTANA,JIEDA and AUDICars. 2.SpecialTool For Santana Jieda&Audi. 3.Best Special Tool.



GTY-A3018

8PCS Bush Extractor With Mechanical-VW/POLO

Suitable for VwPolo(9N)front-axle bracke twishbone silentblocs
Theremovalandreplacementofthesilentbloplaced indirbracket
Iseasilyandsafelycarriedoutdirectlyonthevehicle byusingtheextractor.
Applicable:VWPolo(9N);SEATIbizaIV, Cordoba(abBj.02)AlteaSkodaFabia Roomster;AUDIA2.



GTY-A3021

Engine Alignment Locking Timing Tool Kit

4 x Camshaft Timing Tool
4 x Camshaft Adjuster Tool
1 x Fuel Injector Puller
1 x T100 Cam Sleeve
1 x Fuel injector seal install tool
Forged by high quality steel, durable and stable. which can withstand high-strength pressure. At the same time, it has high dimensional accuracy, durability and corrosion resistance.



GTY-A3023

Universal Press Support Block Plate Bearing Bush

Package includes:
5 x adjustable steel support columns - 3 x 5.9" / 15cm, 1 x 7.5" / 19cm, 1 x 4.3" / 10.5cm
1 x swivel lock base press plate - 7.9" x 9.8" x 1.6" / 20cm x 25cm x 4cm
1 x spacer block
2 x locator plates
4 x pressure distribution washers
4 x small washers
4 x small bolts
3 x high pressure nuts
1 x high pressure bolt



GTY-A3020

Bush Extractor With Mechanical-VW

Flywheellockingtoolsandcamshafttimingpins
Applicable:LANDROVERsport2.7TDV6, JAGUARS-typeV6TDV6



GTY-A3022

52 Pcs Wheel Bearing Mounting Washers Pressure Piece Propeller Set

Key Features:
With this chrome molybdenum steel kit, you can assemble your own bearing. Choose the desired size and install it on the driver tool. The rings range from 18mm to 65mm in 1mm increments. All 50 pieces are interchangeable so you get 2450 different sizes.
Rings range from 18mm to 65mm in 1mm increments.
Contains:
1 x Ring Connector (12mm x 45mm)
1 x Handle (12mm x 180mm)
49 rings



GTY-A1033

Balancer Puller And Installer Kit

A professional tool set for balancer replacement. Built-in bearing makes balancer replacing job easy and damage-free,4-slot puller plate plus 9 threaded adapters fit to balancers on most engines.



GTY-A3030

Glow Plug Removal Set

For removing broken or damaged glow plugs. Removes 8mm and 10mm glow plugs.



GTY-A3047

7PC VAG TDI Injector Puller Set Automotive Maintenance Tools

Designed for the quick and professional extraction of injection. Nozzles and unit-injector(pd) elements from diesel engines. Suitable for vw-audi diesel engines. Including:
1.4 sdi / tdi; 1.9d / sdi/tdi / tdi (pd); 2.0tdi(pd) and (pd 4-valves); 2.5tdi;
2.5tdi(pd); 2.8tdi (pd) 2.7 / 3.0 tdi (common rail); 4.2tdi (common rail)



GTY-A3056

Diesel Injector Puller Set

1.This special designed diesel injector puller set is ideally for the need to remove stubborn diesel injector. No need to remove cam cover and the use of slide hammer.
2.Fitted mainly to Mercedes C-class, E-class, Sprinter Vehicles and Chrysler Grand Cherokee 27crd(00-).



GTY-A3029

4PCS Spark Plug Puller Set VAG

Suitable for installation/removal of ignition coils on VAG vehicles. Long shafts with composite T-style handle for added control and stability. Prevents damage to ignition coils whilst allowing faster removal.



GTY-A3043

Engine Timing Belt Tool

Suitable for engines with elastic ribbed belts such as Alfa Romeo, BMW, Chrysler, Fiat, Ford, Mercedes, PSA, Seat, Skoda, Smart, Volvo, VW, Audi, etc.
Two tools included, one for installation and one for removal.
This tool set is quickly and easily removal and installation of the new elastic ribbed belts required.



GTY-A3054

9PCS Injector Extractor Set for Benz

1.With slide hammer for DB CDI-engines & Mercedes CDI engines OM 611, 612, 613 etc.
2.For removing stuck and the seized common-rail injectors without dismount the cylinder head.
3.The sturdy construction will enable the swift removal of even the most severely seized in injector.
4.Specification:
Material: S45C steel.
Total Length: 350mmL
Contents: Slide Hammer (1.75kgs)
Adaptor M17 x 1.0
Adaptor M27 x 1.0 for Bosch injector nozzle
Adaptor: Puller w/M12 x 1.75



GTY-A3065

Camshaft Drive Belt Pulley Puller Set

Special puller design for pulling camshaft pulley wheels.
Applicable: 4&6 cylinder,V6&V8 engines on VW and AUDI petrol engines



GTY-A5001

SAC Clutch Tool Set

Necessary for pre-tensioning self adjusting clutches before removal or installation. Prevents plate distortion which may prevent the clutch from disengaging or cause dragging. Features a refitting tool, allowing the clutch adjuster to be wound back, and six alignment adaptors.

Supplied in carry-case

Specification:
Spigot Adaptors: $\phi 15/23$, $\phi 15/28$, $\phi 15/34$, $\phi 21/23$, $\phi 20/23$, $\phi 14/15/20$ mm.
Assembly Flywheel Threads: $\phi 6 \times 1.00$, $\phi 7 \times 1.00$, $\phi 8 \times 1.25$ mm.



GTY-A5002

SAC Clutch Tool Set

Necessary for pre-tensioning self adjusting clutches before removal or installation. Prevents plate distortion which may prevent the clutch from disengaging or cause dragging. Features a refitting tool, allowing the clutch adjuster to be wound back, and six alignment adaptors.

Supplied in carry-case.



GTY-A8038

Diesel Injector Puller Kit

Assists removal of stubborn BOSCH and LUCAS diesel injectors for saving time when injectors are difficult to remove.

With M8, M12, M14.



GTY-A8039

7PCS Diesel Injector Seat Cleaner Kit

Set of five diesel injector seat cleaners, centring pilot and T-handle. Used to clean/decarbonise injector seats when changing injectors. Helps to avoid blow-back due to poorly seated injectors.

Suitable for a wide range of vehicles.

Centring Pilot: 7mm

Reamer Sizes & Applications: 15mm Flat, Various Vehicles, 17mm Flat x 2, Delphi/Bosch (BMW, PSA, Ford), Bosch (Mercedes CRD), 17mm Angled X2; (Fiat, Iveco).



GTY-A8040

13pcs Alternator Freewheel Removal Set

Contents:
Combined Socket Bits: 1/2" Sq Drive;
TRX-Star - T50-33T x 113mm,
Splines - M10-33T x 113mm
Splines - M10-33T x 113mm
Splines Adaptors: 15mm x 33T, 22mm x 33T
Hex Adaptor: 22mm
Round Adaptor: 35mm-4 pin
Bits: 10mm Hex Drive; TRX-Star - T40, T50,
Splines - M8, M10, Hex - H8, H10
Adaptor: 1/2" Sq Drive x 10mm Hex.



GTY-A8041

18pcs Alternator Freewheel Removal Set

3-Combined Socket for Alternator
T50 x 113mmL Socket; M10 x 113mmL Socket;
3/8" Dr. x M10 x 80mmL W/ $\phi 14 \times 33T$
1-Bit socket M10 x 140mmL
2-Teeth Socket: 15mm HEX x 33 teeth;
22mm HEX x 33 teeth
1-22mm HEX Socket
2-22x28 mm Hex socket 19x28 mm Hex socket
1-35mm Round Socket W/4 pins
1-1/2" Dr. SQ.(F) x 10mm Hex.(F) Bits Adaptor
1-M10xH12x64L bit6-10mm(Hex Shank) x 75mmL
CR-V bit: T40, T50, M8, M10, H8, H10



GTY-A8042

22pcs Completely Alternator Repair Set

Specification:
3-Combined socket for alternator, T50 x 113 mmL;
M10 x 113mmL; 3/8" Dr. x M10 x 80mmL W/ $\phi 14 \times 33T$
1-Bit socket M10 x 140 mmL
3-Teeth socket: 15mm x 33, 22mm x 33, 15mm x 33
2-22mm HEX socket, 15mm x 33, 22mm x 33, 15mm x 33
3-22 x 28 mm, 19x28mm, 21x28mm HEX SOCKET
1-35mm round socket w/ 4 pins
1-38mm HEX x W /3 pins
1-1/2" Dr. SQ.(F) x 10mm HEX. (F) bits adaptor
1-M10 x H12 x 64L bit
6-10mm (HEX shank) x 75 mmL CR-V bit:
T40, T50, M8, M10, H8, H10



GTY-AN7012

12PCS Power Steering Pump Pulley Kit

Pulley puller and installer kit.
Removes pressed-on alternator and power steering pulleys on late model GM, Ford and Chrysler engines.
Installs late model GM alternator and power steering pulleys including Quad 4
Blow molded case for easy storage and transport.



GTY-AN7013

Universal Pulley Holder & Fan Clutch Set

- This set is designed to remove and install fan clutch & hold the camshaft pulley.
- Use for most fo cars.
- Contents with different tap to fit any car and pin width can adjust.
- Can adjust different width from 40mm to 200mm.
- Size available: $\phi 6$ mm- $\phi 10$ mm, $\phi 8$ mm- $\phi 11$ mm, $\phi 10$ mm- $\phi 12$ mm, $\phi 11$ mm- $\phi 16$ mm.



GTY-AN7031

Power Steering Pump Pulley Kit

Removes and installs power steering pump pulleys. Includes pulley remover, pulley installer and quick disconnect coupler tool.

Compatible with most current domestic cars.



GTY-NA1070

CHANGEABLE TWO JAWS PULLEY REMOVER

Suitable for using when the space is limited. To change the part easily for fitting the different cars.

Jaw length: 72/95mm
Jaw depth: 18mm; width: 4.4mm



GTY-B2001

Adjustable Wheel Bearing Lock Nut Wrench

Adjustable jaws with locking feature to suit both hexagon & octagon wheel bearing lock nuts. Includes three sets of pins to suit lock nuts with pin holes.

Capacity: 6PT lock nuts: 1-3/4" to 5-3/4" (49-135mm) 8PT lock nuts: 1-3/4" to 5-5/8" (49-143mm) Pin diameters: 1/4" (6mm), 5/16" (8mm), 3/8" (10mm).



GTY-BN7014

Clutch Alignment Tool

Chemically blackened steel components in presentation box.
Aids alignment of clutch plate for assembly.

Applications: Audi, Citroen, Fiat, Ford, Honda, Mazda, Mitsubishi, Nissan, Opel, Peugeot, Renault, Rover, Saab, Toyota, Vauxhall, VW, VOLVO.



GTY-E1064

Injector Extractors Set

Package: BMC with color label



GTY-NA1001

Piston Ring Service Tool Set

Piston ring compressors with ratchet key-3in. capacity 53-125mm 3-1/2in. capacity 90 - 175mm 4in. capacity 90 - 175mm
Piston ring tool capacity : 50 -100mm
Piston ring groove cleaning fits :
2 - 5in. / 51 -127mm
Cleaning blade 1 size : 1/16 - 3/16in
Cleaning blade 2 size : 2.0 - 4.5mm
Cleaning blade 3 size : 1.2 - 5.5mm
Offset Driver : Phillips and slotted



GTY-NA1007

Universal camshaft sprocket puller

Special designed to remove the sprocket on a wide range of vehicles.
Special jaws to hold the sprocket for removing the pulley.



GTY-NA1010

SOLUTION FOR BMW COMMON RAIL INJECTORS

Solution For BMW Common Rail injectors. Complete set for removing BMW CR Injectors without dismantling the cylinder head. Equipped with a blower adapter to clean the injector seats.
Bosch injectors: common rail injectors mounted on BMW.
Application ENGINES: BMW Common Rail: M47TU M57, M57TU



GTY-NA1025

CLUTCH ALIGNMENT TOOL

Pre-tensioning self
Adjusting clutch before removal or installation



GTY-NA1052

CLUTCH ALIGNER SET

Align single disc clutches on most vehicles, light truck & tractors.
Properly aligns clutch plate by tapered cone fitting into pilot bushing or bearing.
Size: 8 collects ranging from 0.465"(11.8mm)to0.980"(24.9mm)



GTY-NA1080

11PCS Clutch Alignment Tools Set

Suitable for a wide range of vehicle including some light commercial vehicles.
Screw action provides fast adjustment for required hub diameter.
Eight interchangeable spigot adaptors aid close alignment.
Spigot adaptors :φ 12,14-20mm
Mandrel:φ 15-19,20-26.6,23-36MM



GTY-NA1016

DIESEL INJECTOR COPPER WASHER REMOVAL TOOL

Collect type easy to hold the copper washer.
Size: inner hole 7mm
Length: 230mm



GTY-NA1028

SCREW PIVOT BUSH INSTALLER/REMOVER BENZ

Applicable:BMW E31, E32, E34, E38, E39, E60, E65, E66



GTY-NA1057

Solution For BMW Common Rail injectors

Solution For BMW Common Rail injectors. Complete set for removing BMW CR Injectors without dismantling the cylinder head. Equipped with a blower adapter to clean the injector seats.
Bosch injectors: common rail injectors mounted on BMW.
Application ENGINES: BMW Common Rail: M47TU M57, M57TU.



GTY-NA1008

UNIVERSAL CALVE REPAIR SPRING REMOVER/INSTALLER

Special designed to remove and install the valve spring and oil seal on various vehicles.
Applicable engine model: BENZ, BMW, TOYOTA, FORD, MITSUBISHI, VAGANDETC..



GTY-B1043

Track Rod End Remover & Installer Set

The tool set allows a quick and easy removal and replacement of the inner steering ball joint without the need to dismantle steering rack from the bulkhead.
Drive head range: diameter 30-35mm, 35-40mm, 40-45mm
The tool allows quick and easy replacement of the inner ball joint on the steering rack. Removal of the rack from the bulkhead is not necessary



GTY-A1080

Spring Spreader

For mounting and dismantling of the steel clamps on the exhaust systems.
Applications: AUDI, SEAT, VW, SKODA...



GTY-AN7072A GTY-AN7072B

Engine Cylinder Hone

A: Removes glaze and scratches from Engine Cylinders.
Adjustable honing tension ensures steady, smooth contact with cylinder wall
Capacity: 2"-7"
Operates with any electric drill
Size : 3" & 4"
B: Flexible shaft for easy use and self-centering
Knurled nut controls honing tension
Capacity: 1-1/4"-3-1/2" Range
Size: 2" & 1-1/8"



GTY-NA1104

3/8" Dr. universal Stud Extractor

Fits 3/8" impact wrench or ratcheting wrench. The stud extractor is adjustable to fit studs that are anywhere from 1/4" to 1/2" (6-12mm) Ideal for removing stripped, rusted or broken studs. Hex drive can be used with an impact wrench, ratcheting wrench or regular wrench



GTY-A1051

Piston Ring Compressor

Self locking ratchet pawl prevents premature release and allows positive locking action.
Size: 3"x175mm
4"x175mm
6"x175mm



GTY-A3048

Puller For Ribbed Drive Pulley

Clamp onto any ribbed pulley. Suitable for use on crankshafts, alternators, air conditioning unit & water pumps.



GTY-NA1053B

Diesel Seal Puller

Specification:
Item Type: Diesel Seal Puller Removal Tool
Material: Carbon steel
Tip Diameter: Approx: 4.5 mm/0.17in minimum to 13.2 mm/0.51in
Maximum Application: Automotive General Purpose generally used in commercial vehicles
Package List:
1 x Diesel Seal Puller Removal Tool



GTY-BN2501

Automatic Transmission Cleaning Oil Changer

Microcomputer control, reliable operation, simple operation
Line self-cleaning, easy to use different types of ATF
Automatic identification of oil path direction
Special oil bottle for cleaning agent is configured
Transmission cleaning function
Electric emptying of new and old oil drums
New and old oil comparison window
Movable cabinet with brakes
Voltage :DC12V/20A(AC220V can be customized)
Maximum pressure :8bar
Load cell :30kg*2
Working tube :2.5m*2
Oil drum/cleaning agent bottle :20L*2 /500m1



GTY-BN2503

Brake Fluid Change Unit Kit

Brake fluid is taken from its container by a pump operating at up to 3.0 bar pressure and is continuously pumped into the brake fluid reservoir. The individual wheel brake cylinders can then be drained of their used brake fluid until the new brake fluid comes through. You thus avoid the regular emptying and filling operations, in contrast to conventional systems and also avoid any resulting water absorption in the brake fluid. The pump used to fill the brake fluid reservoir is equipped with pressure monitoring.



GTY-BN2505

Oil Jug

Model JDL101
Size 250ml
Package Size 72x41x35.5cm
G.W./N.W.12/14kg
PCS 120



GTY-BN2507

Oil Jug

Model JDL201
Size 250ml
Package Size 54x36x48cm
G.W./N.W.17/19kg
PCS 120



GTY-BN2502

17-Piece Set of Brake Fluid Changer Fittings

Those adapters are suitable for most vehicles such as for Mercedes, BMW, Audi, Tesla, Ford, Subaru, Buick, Volvo. All adapters can easily and effectively replace the brake oil cover to connect the brake bleed tools.



GTY-BN2504

Oil Jug

Model JDL103
Size 350ml
Package Size 68x35.5x52cm
G.W./N.W.12/14kg
PCS 120



GTY-BN2506

Oil Jug

Model JDL102
Size 250ml
Package Size 72x41x35.5cm
G.W./N.W.12/14kg
PCS 120



GTY-BN2508

Oil Jug

Model JDL202
Size 250ml
Package Size 54x36x48cm
G.W./N.W.17/19kg
PCS 120



GTY-BN2509

4PCS Fuel Line Disconnect Tool

It is convenient to use and easy to install. It does not require complicated installation steps and skills. It can be directly used to replace old or no longer flexible hose clips. It is convenient and easy to carry. It is an indispensable accessory for normal car.



GTY-A1022

Three-Rawl Machine Filtering Wrench

Removes all oil filters from 2-1/2" to 4" in diameter. Use with 1/2" square drive tool. Size: range 2-1/2-4"(63-102mm).



GTY-A1024

Three-Rawl Machine Filtering Wrench

For loosening oil filters, special steel, black phosphated.



GTY-AN7021

Oil Filter Wrench

Remove all oil passenger car and light-duty truck spin-on-type filter. Size range from 2-1/2" to 3-3/4"(63.5mm-95mm). Use with 3/8" square drive tool. This product with heat treatment carbon steel construction. Tough black oxide finish.



GTY-AN7040

Turbo Grip Wrench Set

- Multi-function strap wrench.
- Strong rubber belt will not slip.
- Flexible strap fits any shape and work easily.
- The ultimate Strap Wrench.
- Use to tighten down nuts and reel clamps.
- Also handy for tightening and loosening oil and fuel filter on engines.
- These strap wrenches provide quick gripping to plastic or chrome plated objects without scratching or damaging the surface.



GTY-A1023

Three-Rawl Machine Filtering Wrench

Remove all oil filters from 63-102mm in diameter. Use with 1/2" square drive tool.



GTY-AN7020

Oil Filter Wrench

Material: Carbon Steel
Special design to remove & tighten most of the oil filters. Quick & easy to change the direction. Steel jaw grip filter without slipping. The large range enable this to fit most standard size filters from 2-3/8" to 4"(60mm-100mm). Use with 3/8" drive.



GTY-AN7022

Oil Filter Wrench

size: 2-1/2" to 4"(63-102mm). 3/8" and 1/2" square drive.



GTY-AN7023

3-LEG WAY FUEL FILTER SPIRAL WRENCH

Fuel tank to remove the sender retaining ring, steel construction, Easy and Full adjustable, 3-LEG Type, range 75-160mm and 24 mm drive.



GTY-A1014

14PCS Cup Type Oil Filter Wrench Set

Cap type filter wrenches, made from 7 and 16 gauge steel, will withstand up to 115Nm (85lb.ft) of torque. Designed to grip like sockets, thereby minimising the possibility of crushed filters. Adaptor allows use with 3/8" or 1/2" Sq drive wrenches.

Contents:
65-14F 68-14F 65/67-14F 76-14F
76-30F 73-14F 75/77-15F 93-15F
90-15F 100-15F 74/76-15F
80-15F 80-82-15F 93-36F
Adaptor: 3/8" sq drive(M) X 1/2" SG Drive(F)



GTY-A1069

9PCS 3/8" Drive Cap Oil Filter Wrench Set

1. Quantity: 9 pieces.
2. Material: Aluminium & S45C steel.
3. Suit: Toyota, BMW, Mercedes etc.



GTY-AN5011

6PCS Nylon Cap-type Oil Filter Wrench Set

Contents:
65/67MM-14F:
MAZDA,PREMACY,MITSSUBISTH JEE
74/76MM-15F:
GM, CHRYSLER, LEXUS, CROWN
76MM-14F:
BUICK, VOLKSWAGEN, PEUGOT,
DAEWOO, RENAULT
93MM-15F: AUDI A6
76/80/93MM-15F/30F/36F:
TOYOTA, MITSSUBISTH, IVECO,
RENAULT, HYUNDAI, BUICK 3/8" Adaptor.



GTY-AN7023B

Quick Approach Fuel Tank Sender Wrench

Specially designed for tightening/loosening fuel tank door nuts when working on gauges, fuel pumps..



GTY-A1068

23PCS Cup Type Oil Filter Wrench Set (Aluminium)

Cup Type Oil Filter Wrench. Die-Cast Aluminium Alloy. Precision Polished.



GTY-AN5003

30PCS Cup Type Oil Filter Wrench Set

Size: 66mm-6F, 65mm-14F, 65/67mm-14F, 68mm-14F, 73mm-14F, 74mm-15F, 74/76mm-15F, 75/77mm-15F, 76mm-12F, 76mm-14F, 76mm-30F, 76mm-8F, 78mm-15F, 80mm-15F, 80/82mm-15F, 86mm-16F, 86mm-18F, 90mm-15F, 92mm-10F, 93mm-15F, 93mm-36F, 93mm-45F, 95mm-15F, 96mm-18F, 100mm-15F, 106mm-15F, 108mm-15F, 108mm-18F, 3 jaw wrench 65-120mm, Adaptor 1/2(F) N 3/8(M), Square Drive Too.



GTY-AN5026

Oil Filter Wrench Set | Φ 60-80/80-96mm | 4 pcs

Suitable for disassembly and assembly of sheet metal housing filter, the more torque applied the stronger the grip. Spring loaded, self contracting. Oil filter wrench 60 to 80 mm, 3/8" drive, for clockwise rotation. Oil filter wrench 60 to 80 mm, 3/8" drive, for counterclockwise rotation. Oil filter wrench 80 to 96 mm, 3/8" drive, for clockwise rotation. Oil filter wrench 80 to 96 mm, 3/8" drive, anti-clockwise rotation.



GTY-A1040

8 PCS Engine Oil Filler Set (Aluminum)

Allows for fast oil filling without spillage. 2 liter funnel fits adaptor for wide application range. Color-coded plastic adapters for oil filler hole. Special angle extension with swivel feature for hard to reach places. Suitable for use on Audi, BMW, Dodge, Honda, Mazda, Mercedes, Nissan, Subaru, Toyota, Volvo and VW.



GTY-B1072

Pneumatic Brake Fluid Extractor & Refilled Bottle

For quick and easy brake bleeding, can be used by one person only. Large 1.5 l canister with aluminium nozzle and clamp for compressed air. Protects the main brake cylinder as no pumping required. Can also be used for hydraulic clutches. 1000 mm silicone hose guarantees a long product life time. Accurately fitting rubber adaptor for the bleeding nipple. 11 canister with shut-off valve and universal clamp for refilling the brake system.



GTY-B1074

Two Way ATF Pneumatic Fluid Extractor / Dispenser

For the extraction and refilling of gearbox / engine oils from motor vehicles, motor bikes, marine engines, generators etc. 6L container with trigger operation for easy use. Filled with screw valve for easy dispersion and extraction of fluids. Working pressure 0-30 psi air supply required with 1/4" air inlet. 1.2M of flexible rubber hose. Capacity: 6L & 10L.



GTY-B1080

Pneumatic Cleaning Gun

Remove the dirt on the surface of car body, wheel window, etc. Can be used for cleaning the dirt on the surface of fabric and leather, engine, tire, hub, plastic, etc.



GTY-B1070

Pneumatic Brake Bleeder

Works with your air compressor to completely flush and refill the brake system on most vehicles.
1. Convenient one-person operation.
2. Flush and refill entire brake system.
3. Use only DOT certified brake fluid.
Capacity: 34 oz., Adapter sizes: 21 to 30mm, 24 to 32mm, 28 to 37mm and 32 to 41mm.
Air requirement: 90 to 120 PSI, Air inlet: 1/4"-18 NPT.
Shipping Weight: 1.90 lbs.



GTY-B1073

Pneumatic Brake Fluid Extractor Bottle

Helpful when bleeding of brake systems. Automatic refilling of the brake fluid tank with valve and clamp. Container size: 1 liter.



GTY-B1075

Pneumatic Brake / Clutch Bleeder Set

Suitable for bleeding brake and clutch systems for vehicles with an ABS system, you'll be able to perform a one-man operation possible in your own garage & suitable for workshop. Low pressure tank (10-40 psi) can be precharged with compressed air - making the unit fully portable. Large reservoir means reduced risk of running the system dry during bleeding process or complete fluid change. Supplied with a range of European, Japanese and US vehicle adaptors.



GTY-B1082

Transmission Oil Filling Tool with Hand Pump, with 15 Adaptors

Viscosity range: SAE0 to SAE140
Capacity: 80 cm³ per cycle
Tank capacity: 7.5 L
Includes the following 15 adaptors.



GTY-B1083
CALIBRE 3L manual brake fluid Bleeder

Standard with adaptor for European cars.
Optional universal adaptor.
Specification:
Dimension: 170 x 190 x 420 m/m
Weight: 1140 g
Material : PE
Power: manual



GTY-B1085
Fluid Flask

With Threaded nozzle for fillers
Material:PE



GTY-H1083
One Man Brake Bleeder

Serves caliper,brake,and master cylinders.
Plastic bottle collects discharged fluid.
Powerful magnet attaches bottle to car.
Deluxe kit includes hoses and tapered fittings.



GTY-D1003
Grease Gun

Large handle with rubber for labor saving.
Capacity:500CC
Included:
Grease gun with one flexible pipe + one metal pipe + two couplers



GTY-B1084
Fluid Extractor

A large 9.0 Liter (2.35 gallon) capacity.
Manual fluid extractor, can be used to extract many kinds of non-explosive liquids.
Completely using hand pump when you without shop air.
New safety design, when the tank is full of liquid, the mechanism will be shut off automatically.
One man, fast, clean and easy operating.
None electric spark, safety for workshop
Capacity:6L & 9L



GTY-B1086
Brake Bleeder 500ML Easy Bleed

Contents of the kit:
- 1x bottle
- 1x cap with tire connector (tube length 2m) and tank connection tube (length 600mm).
- 3x hoses 3.5mm x 670mm; 5.4mm x 320mm; 5.4mm x 183mm
- 1x cap and gasket diameter 25mm for lockeed system
- 1x plug and gasket diameter 27mm for VAG system
- 1x plug 44/45mm and two gaskets for Girling metal and ATE systems (44mm use thin gasket / 45mm use thick gasket)
- 1x cap 46mm for some Girling systems
Operating pressure: 0.7 bar (10 psi) to 1.4 bar (20 psi)
Capacity: 500mL



GTY-D1002
Grease Gun

Features:
1) Wide Rolled Thread Design for Fast and Easy Reloading.
2) Rear Cover and Piston can be Taken Apart for Cleaning.
3) Soft Rubber Grip on Lever Handle for Comfortable Operation.
Capacity:500CC.
Included:
Grease gun with one flexible pipe + one metal pipe + two couplers.



GTY-D1004
Air Operation Grease Gun

Capacity: 500CC
Operating air pressure: 30-150psi
Air inlet: 1/4" NPT
Included:
Grease gun with one flexible pipe + one metal pipe + two couplers



GTY-D1006
Barrel Pump

This barrel pump is designed for fast transfer of lubricants, solvents, agricultural and industrial chemicals, additives, and other non-corrosive liquids from 55 gallon drums.



GTY-D1009
Collecting Oil Machine

Working pressure:1-3bar
The greatest pressure:4bar
Tank capacity:70L
Basin capacity:10L
Medium:Lubricating oil



GTY-D1016
Grease Gun

Capacity:200CC
PVC Pipe:30cm



GTY-D1019
6PCS Air Operated Grease Gun

Capacity: 500CC
Included:
1 PC: AIR GREASE GUN
1 PC: 1/4" QUICK RELEASE COUPLER
1 PC: 1/4" HOSE FITTING
1 PC: METALLIC BEND SPOUT
1 PC: 9" HIGH PRESSURE HOSE
1 PC: MANUAL OPERATED GUN HEAD



GTY-D1007
Grease Pump

Capacity:4L,8L,10L,12L,16L.
With wheel or without wheel.
With foot base.
Good quality handle with rubber non-slip.



GTY-D1015
Grease Gun

Capacity: 400CC
Included:
Grease gun with one flexible pipe + one metal pipe + two couplers



GTY-D1017
For Grease Gun



GTY-D1020
21-piece Pneumatic Reverse Hammer For Nozzle Removal

It contains a large set of adapters for solenoid and fuel supply lines - M8, M10, M12, M14, M15, M17, and M19, which are compatible with various types of injectors.
Compatible with injectors from Bosch, CAT, Cummins, Denso, Delphi, Siemens Common Rail, and others.



GTY-D1022
For Grease Gun

Size:10",12",14",18",24"



GTY-D1024
10L Jerrycan

Capacity 10L
Material Acero/Steel
Weight 2,55Kg
Dimensions (LxWxH) 284x133x386mm



GTY-D1026
AIR-OPERATED OIL PUMP KIT WITH HOSE WITH DISPENSING GUN

Compression ratio 5:1
Air intake 1/4"
Air outlet / Air discharge 1/2"
Operating pressure 6-8BAR
Relative capacity 18L/min
Real air consumption 250L/min
Oil temperature -10/50°C
Viscosity 240SAE
Tube length 950mm
Hose length 4m
Weight 9,10Kg



GTY-D1028
AIR-OPERATED OIL PUMP KIT WITH DIGITAL HOSE END METER

Compression ratio 5:1
Air intake 1/4"
Air outlet / Air discharge 1/2"
Operating pressure 6-8BAR
Relative capacity 18L/min
Real air consumption 250L/min
Oil temperature -10/50°C
Viscosity 240SAE
Tube length 950mm
Hose length 2m
Weight 10,70Kg



GTY-D1023
Grease Coupler



GTY-D1025
10L ANTI-OVERTURN JERRY CAN

Capacity 10L
Material Acero/Steel
Weight 2,75Kg
Dimensions (LxWxH) 240x140x355mm



GTY-D1027
AIR-OPERATED OIL PUMP

Compression ratio 5:1
Air intake 1/4"
Air outlet / Air discharge 1/2"
Operating pressure 6-8BAR
Relative capacity 18L/min
Real air consumption 250L/min
Oil temperature -10/50°C
Viscosity 240SAE
Tube length 950mm
Weight 7,25Kg



GTY-D1029
OIL TRANSFER PUMP 12V

Voltage 12V
Power consumption 5A
Sound intensity 70dB
Fluidity level (Diesel-oil) 2L/min
Fluidity level (Motor-oil) 1L/min
Suction tube dimensions 1,2m
Discharge tube dimensions 1,5m
Pneumatic drive 1,00Kg



GTY-D1030
DIGITAL HOSE END OIL METER WITH PIPE

Fluid inlet 1/2"
Real air consumption 1-35L/min
Operating pressure 6-8BAR
Maximum pressure 100BAR
Viscosity 240SAE
Flowmeter accuracy ±0,5%
Flowmeter repeatability 0,2%
Discharge rate per revolution 25ml/R
Battery Pilas/Batteries
Weight 2,15Kg
Dimensions (LxWxH) 500x90x160mm



GTY-D1032
CORDLESS GREASE GUN

Voltage 20V
Maximum pressure 620BAR
Volume/flow rate 200g/min
Cartridge capacity 420g
Bulk grease capacity 600g
Bulk grease capacity NLG#2
Lenght 760mm
Charging modes Granel/Bulk, Cartucho/Cartridge, Succión/Suction
Compatible with 60012, 60013, 60015, 60016, 60017
Weight 3,60Kg
Dimensions (LxWxH) 400x90x270mm



GTY-A1042
6" Chain Wrench

1. Handle size :6"
2. ø60mm-140mm
3. Many color for customer choose, red, blue, yellow and ect.
4. With rubber coated handle.
5. Material:45# carbon steel drop forged.



GTY-A1046
Oil Filter Wrench

Universal one-handed design.
Jaw slide open to fir around canister.
Fits 3" to 3-7/8" (76-88mm) filters.



GTY-D1031
GREEN OIL DRAIN PAN 18L

Color Verde/Green
Capacity 18L
Material PE
Weight 0,95Kg
Dimensions (LxWxH) 550x460x180mm



GTY-A1041
Oil Filter Wrench

Hardened drop forged CR-V steel tool removes stubborn filters 60mm/m upto 90mm/m.
Slip joint design makes adjustment fast & easy.
Size: 60-90MM
85-115MM



GTY-A1045
Oil Filter Wrench

1. Adjustable for a wide range of filters.
2. Has a cushioned grip for maximum comfort and safety



GTY-A1050
Oil Filter Wrench

60-90mm Pincer-like Moment.
Remove all oil filters from 60-90mm in diameter.
Special for stubborn oil filter.
Comfortable plastic coating handle.



GTY-AN5001

Oil Filter Wrench

Professional swivel handle oil filter wrench unique "Swivel-Handle" design allows adjustable band to rotate 180 degrees, to reach tight areas. Full range of sizes to fit sub-compact to truck filters. Parts are heat-treated for strength and durability and all wrenches feature vinyl grips. Sizes: 2-3/8" -2-7/8"(60-73MM)
2-7/8"-3-3/8"(73-85MM)
3-3/8"-3-3/4"(85-95MM)
3-3/4"-4-3/8"(95-110MM)



GTY-AN5005

Band Type Oil Filter Wrench

Spring steel strap with durable body & control knob tighten filter by adjusting screw for damage-free removal, ideal for application of newer vehicles or in case the filter needs to be refitted. Adjusting screw for damage-free removal. Fit size: 2-3/8" -4-1/2" (60-110mm)



GTY-AN5012

Oil Filter Wrench

Hardened drop forged CR-V steel tool removes stubborn filters 70mm up to 130mm. Slip joint design makes adjustment fast & easy



GTY-AN5021

Oil Filter Chain Pipe Wrench

Material: Carbon Steel
Package: Sliding Card



GTY-AN5004

Half Chain Type Oil Filter Wrench

Material: spring steel
Specification: 2-1/2" -4-1/2"



GTY-AN5009

Oil Filter Wrench

Material: Carbon Steel
Soft handle.
Packing: 6PCS/BOX 36PCS/CARTON



GTY-AN5020

Chain Oil Filter Wrench

Tough chain design for stubborn oil filters. Sturdy metal construction. Plastic handle with moulded finger holds for extra grip. 400mm (16") of chain. Tool measures 200mm (8") in length.



GTY-AN5022

Belt Type Oil Filter Wrench

Rubber coated on the belt to prevent slipping
Material: 45# carbon steel drop forged
Range: 30-160mm
60-260mm



GTY-AN5024

Double Chain Type Oil Filter Wrench

1. Material: Carbon steel.
2. 1/2".
3. Double chains.
4. Use for car oil filter fitting & repair.



GTY-A8012

114PCS Oil Drain Repair Kit

Renew the diameter and replace a new oil drain plug. Six popular sizes fit nearly all applications. Specification: M13*1.25P/ M13*1.5P/ M15 *1.5P /M17*1.5P/M20*1.5P/M22*1.5P
Tap: 1 piece/size
Oil drain plug: 6 pieces/size
Washer: 12 pieces/size



GTY-D1010

Diesel Fuel Priming Set

Complete service tool kit for installation and removal of the valve spring without removal of cylinder head from the engine. Applicable for OHV & OHC petrol / diesel engine on Audi, Nissan, Toyota, Chrysler, Honda, Mazda, Mitsubishi, Porsche, Volvo, VW, etc.



GTY-AN5002

Heavy Duty Oil Filter Wrench

Designed for trucks and tractors. Robust, corrosion resistant construction. Wide band distributes pressure evenly, preventing filter distortion. Use with 1/2" Dr. extension
Size: 4-1/8" -4-11/16" (107-119MM)
4-11/16" -5-5/32" (119-131MM)
5-5/32" -5-11/16" (131-144MM)



GTY-AN5023

1/2" Sq Drive Oil Filter Chain Wrench

Satin finished carbon steel body with 1/2" Sq drive for use with ratchet wrenches. Chain filter wrench for removing difficult filters or any circular object. This robust chain wrench has been designed to remove all oil filters up to 135mm diameter. The chain is simply located around the filter and turned by 1/2" Sq Drive or a 21mm (13/16") spanner. Heavy-duty chain.



GTY-A8011

64PCS Oil Drain Repair Master Kit

Contents:
4 Taps: M13 x 1.5mm-M15 x 1.5mm-M17 x 1.5mm-M20x1.5 mm
5 Oil Drain Plugs M13 x 1.5mm, external hexagon drive 17 mm
5 Oil Drain Plugs M15 x 1.5 mm, external hexagon drive 19 mm
5 Oil Drain Plugs M17 x 1.5 mm, internal hexagon 8 mm
5 Oil Drain Plugs M20 x 1.5 mm, internal hexagon 10 mm
10 each aluminium sealing Rings: Ø 13 - 15 - 17 - 20 mm



GTY-H1118

Oil Screw Chaser Set

Suitable for engine oil screw after skidded. Rethread by chaser. Then twist into screw + gasket. Contents: 1pc Tap
6pcs Screw
6pcs Copper gasket



GTY-D1011

Diesel Petrol Fuel Retriever Extractor Suction Syringe Pump 1.5L & Adaptor

Capacity: 1500 ml
Quick connectors for PSA and Opel/Vauxhall vehicles
2 universal adapters for older car models
Ideal for removing fuels and fluids from fuel lines




GTY-AN5007
Oil Filter Wrench Set

Four-in-oneswiveloilfilterwrenchkitfeaturesone handleandyokeassemblywithfourdifferentbands. Bands can be interchanged quickly with a set of detent pins. With double color dipped handle
Fits: 2-3/8" to 2-3/4" (60-70mm) filters
2-7/8" to 3-1/4" (73-82mm) filter
3-1/2" to 3-7/8" (89-98mm) filters
4-1/8" to 4-7/16" (105-113mm) filters



GTY-AN5008
Oil Filter Wrench

Widesteebandandsturdydesign. Automatic clamping action, dimpled band for a solid grip
Fits: 2-7/8" to 3-1/4" filters.

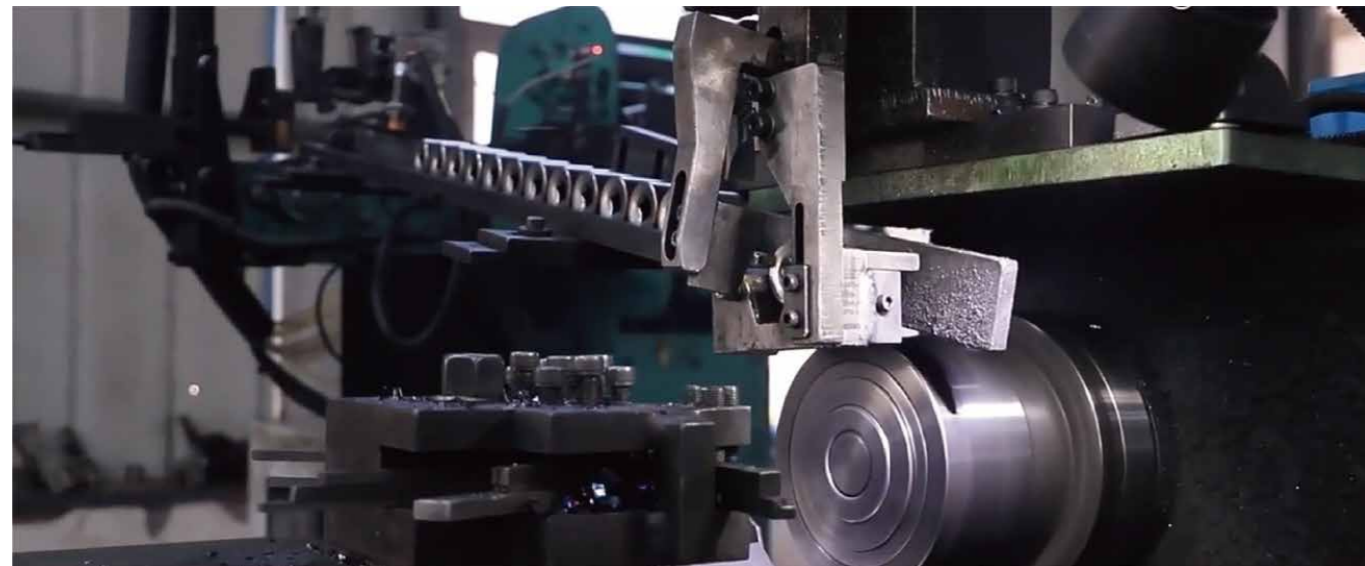

GTY-A3605
Universal Camshaft Seal Removal & Installer

Allow the crank seal to be replaced without dismantling the crank case saving your time and costs. Do not worry about scraping the crank surface.
Universal use covering a wide range of cars with oil seals between 27mm and 58mm in diameter.
The blue seal adapters are made of aluminum to prevent the damage of crank.



GTY-A7020
Master Seal Remover & Soft Hose Pick Set

Easily remove seals or O-rings or pick soft hoses on vehicle.
Provided with different length and angle fits wide applications.
Angled blade is ideal for removing seals in limited space.
Blade material: SCM 400.



GTY-AN7026
2PCS Valve Lappers Set

For hand grinding flat head, unslotted valves. Synthetic rubber vacuum cups are resistant to oil, grease, gasoline and are replaceable.
Cup Diameter: 5/8", 13/16", 1-1/8", 1-3/8".



GTY-A2001
Valve Spring Compressor

Universal compressor with strong adjustable cam-action, parallel lift and automatic locking suitable for small/medium OHV engines.
75-165mm capacity with a 150mm throat clearance.



GTY-A3606
Crankshaft & Camshaft Seal Remover and Installer Kit

Quick and easy work for both removal and installation work.
Ideal for both crankshaft and camshaft seal. Master kit includes wide size seal installers. Provided with 2 seal removers with different length and angle fits wide applications.
Angled blade seal remover is ideal for removing seals in limited space.



GTY-AN7024
Seal Puller

Heat treated black oxide finished tip. Vinyl grip.
1. Remove oil & grease seals
2. Two tips fit most application




GTY-NA1003
Valve Spring Compressor Kit

Complete service tool kit for installation and removal of the valve spring without removal of cylinder head from the engine.
Applicable for OHV & OHC petrol / diesel engine on Audi, Nissan, Toyota, Chrysler, Honda, Mazda, Mitsubishi, Porsche, Volvo, VW, etc.



GTY-A2000
Overhead Valve Spring Compressor

For use on a wide range of OHV, OHC and CHV engines. Not suitable for using on engines with deep seated valves. Allow valve springs and valve stem oil seals to be replaced with cylinder head.
Feature a reversible jaw/adaptor and automatic cam-action locking to a re-determined setting.



GTY-B1010

17PCS Metric Bushing Driver Set Components

Kit includes 3 aluminum handles.
Kit includes 14 aluminum metric bushing adapters.
Metric kit for Motorcycles, Asian and European vehicles.
Aluminum construction will not mar surface or affect bushing tolerance to ensure engine, transmission or hub performance.
Saves the technician time with precise fit adapters.
Adapters: 10-12mm, 12-14mm, 14-16mm, 15-17mm, 16-18mm, 18-20mm, 20-22mm, 22-24mm, 25-27mm, 28-30mm, 30-34mm, 32-36mm, 35-40mm, 38-42mm.
Aluminum construction will not mar the bushing or affect the bushing tolerance which is critical for proper performance of the engine, transmission and hubs.



GTY-B1012D

Bearing Race And Seal Driver Master Set

Makes it easier to insert wheel bearing race and seals without damage to race and axle housing.
This Master tool set includes nine disc sizes to fit most standard wheel bearings.
Turn discs over to drive seals.
Includes: 1.565"/1.750"/1.965"/2.325"/2.470"/2.555"/2.830"/2.995"/3.180", and handle.
Blow molded case keeps the tools organized and easy to transport.



GTY-E1017B

Universal Axles Slide Hammer Set

- 2.5kg slide hammer with 570mm shaft.
- Use eight ways: external three jaw puller, internal three jaw puller, external two jaw puller, internal two jaw puller, grip wrench dapter, lip puller, hub puller, dent puller.
- Puller type: twin leg.
- Internal capacity: Φ 35-110mm reach :82mm
- External capacity: Φ 50-140mm reach :75mm
- Puller type: triple leg
- Internal capacity: Φ 50-135mm reach :82mm
- External capacity: Φ 20-135mm reach :75mm



GTY-E1027

Steering Wheel Remover Set

Removing steering wheels of most vehicles, with or without telescoping tilt.
Steering columns is easy with this new set.
The steering wheel lock plate compressor is also included, to compress the steering wheel lock plate to remove or install the snap ring.



GTY-B1012

10PCS Bearing Race And Seal Driver Set

Permits installation of tapered bearing races and seals without damage to the component or housing.
Includes a driver handle plus.
Popular bearing and seal drivers, ranging from 1.565" to 3.180".
1. Tapered side of driver is used to install races.
Invert the driver to the flat side to install seals.
2. Includes driver handle with bolt, plus these tool sizes: 1.565", 1.750", 1.965", 2.325", 2.470", 2.555", 2.830", 2.995", and 3.180".



GTY-E0001

Two Sets Bearing Separator Set

Drop forged.
Bearing Size: 30-50MM & 50-75MM
Pull out the bearing with the H-type beam and bolts.



GTY-E1026

Special Steering Wheel Puller Set

Drop forged.
Heat treated steel.
Black oxide finished and chrome plated.



GTY-E1033

Inner Bearing Puller Set

One slide hammer assemble & 4 clamp.
Attachments for 3/8" to 1/2" (10-14mm), 9/16" to 11/16" (15-19mm), 5/8" (18-25mm) & 1" to 1-1/4" (25-32mm)
1.D. Bearings' pulling.
Open clamps by turning handle clockwise to snug against the bearing for pulling out evenly without damage the parts.



GTY-E1037

Two Bearing Separator Set

Bearing separator inside.
Pullout the bear with the H-type beam bolts.
Bearing size: 30-50mm & 50-75mm



GTY-E1043

13PCS Harmoinc Balance Puller Set

1x 5" Alloy Steel Pressure Screw.
1x 3/4" 16 Thread.
1x Small Centring Adaptor.
10x Bolt (2PC: 5/16"x4" 2PC: 1/4"x3" 3PC: 1/4"x2" 3PC: 5/16"x2")
Yoke Allows 2 or 3 Hole Applications.
Removable Swivel.



GTY-E1054

Universal Puller Set

Legs: 100-200 & 250mm long
Variable width
Chrome molybdenum



GTY-E1060

Special Triple-Arm Puller Set

With pulling legs for narrow spaces in different lengths.
Particularly well suited to be hung up on workshop walls.
All required clamping depths available at any time.
The puller is fitted with extremely pointed ends of hooks and an extremely tight hook shift.
Size: Width: 130mm
Arms height: 100, 200, 250mm/each 3pcs



GTY-E1042

Pressure Screw Separator Puller Set

Drop forged.
Bearing Size: 75-105MM
Pull out the bearing with the H-type beam and bolts.



GTY-E1046

46PCS Harmonic Balance Puller Set

For pulling harmonic balancers, steering wheels, flywheels, and gears and pullers with tapped holes.
Puller yoke has 4 slots for 2 or 3 hole applications.
Swiveling center tip prevents damage.



GTY-E1056

5PCS Ball Joint Puller Set

Drop Forged
Package: Blow case



GTY-E1061

Two Arms Universal Puller Set

With pulling legs for narrow spaces in different lengths.
Particularly well suited to be hung up on workshop walls.
All required clamping depths available at any time.
The puller is fitted with extremely pointed ends of hooks and an extremely tight hook shift.
Size: Width: 130mm
Arms height: 100, 200, 250mm/each 2pcs



GTY-E1062

Blind Hole Bearing Puller Set

Open clamps by turning handle clockwise to snug against the bearing for pulling out evenly without damage the parts.

- Contents:
 Shaft: Slide hammer shaft 390mm long
 Hammer: Hammer WG. 100mm long-2.15lb(940g)
 (8-10mm): 5/16" to 13/32"
 (10-12mm): 13/32" to 15/32"
 (12-14mm): 15/32" to 9/16"
 (15-17mm): 19/32" to 11/16"
 (17-20mm): 11/16" to 25/32"
 (20-24mm): 25/32" to 15/16"
 (25-29mm): 1" to 1-1/8"
 (30-32mm): 1-3/16" to 1-1/4"



GTY-EN7017

Ten LBS Nine Pieces Dent Puller Set

- 1.The 10lb slide hammer and the variety of tapered attachments easily pulls dented or creased sheet metal back into place.
- 2.Solid steel shaft with knurled handle for sure grip.
- 3.Drop forged,steel hooks,pullers,and attachments.
- 4.Fully hardened alloy steel attachments.
- 5.Heavy duty blow case.
- 6.Designed to remove dents for auto body repairs without removing the inside panel and upholstery.
- 7.The long shaft allows for a more powerful pulling force.



GTY-EN7019

9PCS Master Hub Puller Tool Set

- Kit Services: Ford Taurus, Tempo and Escort, and Mercury Topaz and Lynx vehicles
- Set includes
 - RWD Hub Puller 4.5/5.5"
 - 5/8"x 5-1/2" NF Center Screw
 - 1-1/2" Tube
 - 1-1/8" Washer
 - 3/4" Nut
 - 5/8" Nut
 - M22 x 1.5 Puller/ Installer
 - M20 x 1.5 Puller/ Installer
 - FWD Hub Puller 3.75/4.5"
 - Storage Case



GTY-EN7022

Truck Injectors Extractor

The truck injectors extractor is a special injector puller solution for new generation trucks.

Application: trucks with injector pump systems or with traditional truck injectors: Volvo, Scania, Mercedes Benz, MAN, Renault, Iveco, etc.



GTY-E1063

14PCS Injector Extractor W/Slide Hammer Eet

For removing stuck and the seized common-Rail Injectors without dismount the cylinder head. For all injection nozzle cars.

- Slide hammer: 3.9KGS
 Adaptor: M14 x 1.5 for DELPHI
 Adaptor: M17 x 1 for Bosch
 Adaptor: M20 x 1 for DENSO
 Adaptor: M24 x 1 for SIEMENS
 Adaptor: M27 x 1 for SIEMENS
 Adaptor: M27 x 1.0 for Bosch injector nozzle
 Adaptor: Puller W/M14x 1.5P
 4 pcs Injection nozzle socket 100L-25-27-29-30mm 6PT



GTY-EN7018

8Pcs Front Hub Remover and Installer Kit

Kit Services: Mercury Sable, Topaz and Lynx vehicles and Ford Taurus, Tempo, Probe and Escort.

- Set includes:
- 1-1/2" Installer Tube
 - M20 x 1.5 Installer Center Screw
 - M22 x 1.5 Installer Center Screw
 - 5/8" x 5-1/2" NF
 - 1-1/4" Washer
 - 3/4" Nut
 - Front Hub Remover Yoke
 - Nut



GTY-EN7020

Rear Axle Puller Kit

- Pulls rear axles, seals and bearings on most front and rear wheel drive vehicles
- Set includes axle yoke; bearing puller 1"-1-7/8"; bearing hook; bearing puller 1-3/16"-2-3/8"; bearing puller 1-3/8"-2-7/8"; locknut; hammer shaft and T-handle; slide weight
- Durable storage case with step-by-step instructions
- Precision-built to meet or exceed ANSI standards
- Lifetime factory warranty



GTY-EN7023

Silver Slapper 8Way Slide Hammer Puller Set

Silver slapper slide hammer You can pull flange-type rear axles, remove Stubborn oil seals and bearings and other press-fit parts. Puller jaws can be set up for 2/3 jaw internal or external pulling jobs.

Includes: 5lb slide hammer, Rear axle pulling attachment, Grip wrench adapter, Cone, Dent puller attachment, Puller hook attachment, 3-way cross head, Dent puller attachment, 2-way cross block.



GTY-EN7024

Prechamber Extracting Slide Hammer Set For Benz

The Benz prechamber extracting slide hammer set is designed to remove the stubborn diesel pre-combustion chambers.

Application: OM615, OM616, OM617, OM601, OM602, OM603, OM604, OM605, OM606.



GTY-NA1006

6PCS Injector Puller (For Bosch Injector System Of Mercedes Benz)

For removing adapted tight common rail injectors without having to disassemble cylinder head. Use for mercedes-benz cdi engines 611.612.613,etc. Injection puller with impact hammer,injection nozzles that do not fit very tightly can be pulled out without needing to take then apart or remove the cylinder block.



GTY-NA1059

Mini Bearing Separator Set 9pc

Compact set containing bearing separator, yoke and extensions.Chrome Vanadium components ensure long tool life.Also suitable for removing small gears,wheels and fittings from shafts. Supplied in storage case. Contents: Separator 15-58mm,2"Jaw50mm, Thrust Screw,2"Extension Rod 45mm, 2"Extension 30mm,Cross Beam.



GTY-NA1071

Extractor Drum Brake Universal Puller

The kit includes:

- 1 storage box
- 1 pressure disc Ø 62 mm
- 1 pressure disc Ø 100 mm
- 5 extraction claws
- 1 flat support piece
- 1 pointed support piece
- 1 pressure rod
- 1 sliding handle
- 1 notice in French, English, Spanish and German



GTY-NA1002

3-Jaw Internal & External Puller Set

Size: Small of internal puller 15mm-30mm. Large of internal puller 30mm-80mm. External puller 15mmto -80mm. Locking the nut to open 3-jaws and clip the bearing. And then use the slide hammer to pull out the bearing.



GTY-NA1015

HYDRAULIC GEAR PULLER SET

For agriculture machine, automotive, and industry use. Hydraulic ram included for labor saving. Material:SCM415 hardened 40°-45° Packing:carrying case 1set / 16kgs / 17kgs / 1.2'



GTY-NA1069

Three Claw Puller Set

3" 75mm
 4" 100mm
 6" 150mm
 8" 200mm
 2 or 3 jaw gear puller set container
 2 jaw:3"4"6"8"
 3 jaw:3"4"6"8"
 heat treated alloy steel
 precision machined



GTY-NA1078

18pcs Heavy Duth Wheel Heb Puller Set

Remove wheel hubs,haft shafts,brake dums, drive shaft directlyin the car Use for Audi, VW, Alfa Romeo, Ford, Citroen, BWM,Mazada,Fiat,Benz,Seat, Opel, Peugeot, Renault,Skoda,Porsche. Amechanical spindle can press out draft, With 4.3 kg Slide Hammer.Bolt size: M12*1.5, M14*1.5



GTY-B1012E
**Adjustable Bearing Race
And Seal Tool**

Aluminum With Anodized Finish
The Three Stepped Jaws Cover a range
of O.D./I.D'S From the 0.72"-3.5"(18.5-89mm)
Aluminum construction equipped with a steel
Striker shaft handle



GTY-E1002
**Drop Forged 2-Jaw
Gear Puller**

Drop Forged 2-JAW Gear Puller With Case.
Size: 3",4",6",8",10".




GTY-E1005
Shaft Sleeve Puller

Material:40CrMnTi
Size:1"25mm,2"50mm,3"75mm
Screw rod:M8,M10,M12



GTY-E1018
Ball Joint Puller

Special steel for removing the ball pivots on
steering arms,steering tie rocks,steering
knuckles,etc.
Jaw open:20mm



GTY-E1001
**Drop Forged 3-Jaw
Gear Puller**

Protective case screw top for easily use.
Drop Forged 3-JAW Gear Puller With Case.
Size: 3",4",6",8",10".



GTY-E1003
**Drop Forged 3-Jaw
Gear Puller**

Jaw drop-forged,Beam drop-forged,
T-shaped thread.
Drop Forged 3-JAW Gear Puller .
Jaw drop forged,Beam drop forged,T-shaped thread.
Size: 3",4",6",8",10"



GTY-E1015
2/3 Arm Gear Puller

Simply by shifting one of the arms.
Size: 4",6",9"



GTY-E1019
Tie Rod End Puller

Drop forged of high-grade,heat-treated steel
Screw made by special process



GTY-E1021
Bearing Separator

415 Hardened 42°~45°.
Capacity:30-50mm,50-75mm,
75-105mm.
Bolt:9.5mm*L125MM*3/8"*24UNF,
12.7mm*L135mm*1/2"*20UNF,
16mm*L165mm*5/8"*18UNF,
19mm*L260mm*3/4"*16UNF.
Body thread: 3/8"*16UNC, 3/8"*16UNC,
1/2"*13UNC, 5/8"*11UNC.



GTY-E1025
Ball Joint Puller

It is good to use with powerful structure.
Stand design to solve the space problem.
Jaws open: 19mm



GTY-E1052
Ball Joint Separator

Universal tool for separation of ball joints.
Can be adjusted in two sizes for wider
working areas.
Opening:20mm
Adjustable height: 48mm



GTY-NA1062
**Two Leg Puller for Battery
Terminals and Windscreen
Wiper Arms**

Adjustable and suitable for most car and truck types.
Adjustable puller arms 25 to 45mm.
Maximum range:20mm



GTY-E1024
Pilot Bearing Puller 3 Jaw

Work range: 12-38mm
Package: Blow Case



GTY-E1051
Ball Joint Separator

Heat treated drop forged steel body & bolt for
long rough usage.
Spread ball joints easily where space prevents
use of direct action method.
Jaws open: 19mm




GTY-E1080
Universal Two Arm Pullers

The universal two arm pullers can be adapted
to be inner or outer pullers by reversal of the
two arms on the yoke.



GTY-E1081
Release Shaft / Bolt Puller

suitable for the following work:
● Extracting the clutch release shaft on Fiat Ducato (1994)
with pulling clutch.
● Extracting the chain guide rail bolt on BMW and
Mercedes engines.
● Includes puller body with M8 x 1.25 internal spindle thread.
● Pull clamp for clutch release shaft.
● M6 x 1.0 (M8 x 1.25) bolts for removing the guide rail bolt



GTY-B1003

Ball Joint Service Tools Kit

This press removes/replaces universal joints. The Frame Press for universal joint removal; removal/replacement of anchor pins. The joint removing/installing set for most press fit ball joints.



GTY-B1038

21 PCS Master Adaptor Set

This tool kit is designed for use on all cars and light trucks that have press-fit type ball joints without the need to remove the control arm from the vehicle.
C-frame and forcing screw
Installation adaptor
Removal adaptor
Installation cups
Removal cups
Receiving tubes



GTY-B1043

Hydraulic Ball Joint Separator

Heavy-duty ball joint splittersuitable for HGV vehicles. Specially designed to be operatedmanually or by 10 tonne hydraulicram supplied. Features a step down thread adaptor that allows fitting of the manual thrust screw or hydraulic ram. Jaw Capacity:35mm Jaw Opening Capacity:100mm



GTY-B1047

5PCS Tie Rod Set/Ball Joint Separator Kit

Made from heat treated drop forged steel. Three forged steel forks Interchangeable shafts for use with ball pein hammer or air hammer. Suitable for most small cars and light commercials.
1. Tie rod separator opening:11/16"
2. Ball joint separator opening:15/16"
3. Pitman arm wedge opening:1-1/8"
4. Handle with lock nut 8"(200MM)
5. Pneumatic handle 7"(180MM)



GTY-B1004

10PCS Ball Joint Service Tools Kit

Removes and replaces ball joints Removal and replacement of press fit parts such as ball joints,universal joints and truck brake anchor pins can now be accomplished without having to use makeshift techniques. This kit will remove even rusted or corroded parts. Included:
C-frame Press,Receiver Tube (3" O.D.x 2-3/4" I . D.), Receiver Tube (2-1/2"O.D.x 2-1/4" I . D.), Receiver Tube (2"O.D.x 1-3/4" I . D.), Installing adapter and removing adapter



GTY-B1042

Ball Joint Service Tool Set

Includes all the receiving tubes and removing/installing adapters needed to work on most GM, Ford and Dodge. 2-wheel and 4-wheel drive pick-ups, vans and sport utility vehicles through 1997. Work on press-fit upper and lower ball joints. Set also includes live center forcing screw plug and a plastic Storage/carrying case.



GTY-B1046

Inner Tie Rod Tool Set

Works on the inner tie rods with inaccessible wrench flats. Many inner tie rod end sockets do not have a complete hex on the full length of the socket. The rounded socket ends prevent access to the wrench flats,seven crows feet. Content sizes: 1-3/16",1-1/4",1-5/16",1-7/16",14mm, 17mm and 33.6mm,to engage the wrench flats. The long socket then slips over the tie rod end and connects to the crowsfoot.



GTY-EN5001

Ball Joint Puller Set

Jaws open: 23mm,28mm,34mm.



GTY-NA1009

Large Ball Joint Separator

Large ball joint separator is designed for use on all cars and light trucks that havepress-fit type ball joints. For extracting work pieces without bore. Valuable accessory for common pressand pull sleeve sets. Open c-shaped construction allows more flexible operation directly on vehicle compared to conventional pressframes. Magnetic holders on thrust plates for convenient working. With impact quality M18 vibration spindle; The momentum produced by impact wrench acts like hammer strokes on the work piece, thus causing tight connections to break open can be converted for use with hydraulic spindle (un1.1/2"x16 thread),9"opening.



GTY-NA1024

Changeable Ball Joint Separator Set

Innovative quick change and simple action for suitable fork. Enable operator to select correct jaw size without taking entire extractor to the vehicle. Jaw Opening:20, 22, 24, 27, 30mm Thrust screw lengths:100mm Pivot rod length:125mm



GTY-NA1029

VW T4 Front Axle Upper Ball Joint Installer & Remover

Applicable: VW, T4 2.0 L, 2.4L Diesel & Gasoline E oil screws. To use on the car without removing the upper wishbone.



GTY-B1044 & B1045

Track Rod End Remover & Installer

B1044: Head OD : 72mm Head application 28-35MM B1045: Head OD : 89mm Head application 35-45MM



GTY-NA1014

Changeable Hydraulic Ball Joint Separator

Special designed to be operated manually or by 12 tonne hydraulic ram. Features a step down tread adapter that allows fitting of the manual thrust screw or 12 tonne hydraulic ram supplied. For splitting track-rod ends, anti-roll bar mounting and ball joint. Jaw Opening: 30, 34, 40 mm Thrust Screw Lengths: 100, 80 mm Pivot Rod Length: 125 mm



GTY-NA1026

Benz Ball Joint Installer/Remover

Special design to remove and install the ball joint on car without remove any parts. Applicable:W220,W211,W203 Patented.



GTY-NA1038

7PCS Drive Shaft Feeder Set

For easy feeding of drive shaft into the wheel hub. Made of high grade steel. Based in a standardized industrial wheel bearing. Contains 6 spring bushings with different threads sizes. Can be used for following car types: Subaru (M16x1.5) VW Beetle,Touareg,Porsche Cayenne (M20x1.5) BMW E30,E46 (M22x1.5) BMW E36,Mercedes W203 (M24x1.5) BMW E32,E34,E38,E39,X5 (M27x1.5) BMW E32,E34,E36(M30x1.5)



GTY-B1048

Ball Joint Separator

Length:12" & 16" Opening:15/16" & 21/32" Made from heat treated steel to withstand rough usage.



GTY-B1049

CV Joint Removal Tool 95mm

Quickly removes the CV Joint from the drive shaft without damaging the joint, and keeps hands free for releasing retaining circlip.
Reduces risk of damage to transmission.
Saves on labour time and suitable for most vehicles.



GTY-B1066

Inner Tie Rod Tool

The master tie rod tools easily replaces inner tie rod ends without removing the rack & pinion.
Capacity: 33-42MM & 40-47MM



GTY-B1068

Commercial Vehicle Ball Joint Separator 32mm

It's used to remove the truck ball joint.
Jaw open 32mm



GTY-B1091

Rack End Remover 2555mm

Fits knuckles with hex drive, two flats or round ends.
For steering rack knuckles with a diameter of 25-55mm



GTY-B1065

Universal Tie Rod Wrench

1/2" Square Drive.
Capacity: 27-42mm.
Easily removes inner tie-rod ends without disassembling rack & pinion.
Universal applications.



GTY-B1090

Haldex Brake Linkage Adjuster Extractor

Substantial construction for drawing off firmly sitting BPW brake linkage adjusters.
Overall height 127mm.
Overall width 160mm.



GTY-B1069

Ball Joint Remover-Volvo FM12/FH

Used to remove the end ball joint of the drag link.
Applications: Volvo FM12 and FH trucks
Jaw opening: 37mm



GTY-B1092

Volvo Ball Joint Separator

Application on Volvo S60, V60, SX60, V40 SX70, S80 (2011 to 2017).



GTY-AC001

Automobile Air Conditioner Cleaning and Recycling Filling Machine

Microcomputer control, fully automatic
Modular design, stable work, easy to maintain user-friendly interactive interface, simple operation pulse cleaning/automatic recovery/regeneration/storage automatic/manual discharge of old oil (electronic control)
Automatic/manual refill (electronic control)
Quantitative filling of refrigerant
Built-in database, printer, a variety of equipment maintenance functions
Input voltage: AC220V/6A AC110V/10A
Compressor: 16CC
Vacuum pump: 42.5L/Min, 5Pa
Load cell: 50kg 10g/6kg 10ml²
Maximum working pressure: 20Bar
Pressure gauge: 35bar/25bar/35bar



GTY-AC003

Automobile Air Conditioner Cleaning and Recycling Filling Machine

Microcomputer control, fully automatic
Modular design, stable work, easy to maintain user-friendly interactive interface, simple operation pulse cleaning/automatic recovery/regeneration/storage automatic/manual discharge of old oil (electronic control)
Automatic/manual refill (electronic control)
Quantitative filling of refrigerant
Built-in database, printer, a variety of equipment maintenance functions
Input voltage: AC220V/6A AC110V/10A
Compressor: 16CC
Vacuum pump: 42.5L/Min, 5Pa
Load cell: 6kg 10ml & 50kg 10g
Maximum working pressure: 20Bar



GTY-AC005

Valve Core Loading and Unloading Tool

R410A R22 AC Schrader Valve Core Remover, Dual Size 1/4" & 5/16" Port
HVAC Valve Core Removal Installer for Refrigeration Air Conditioning A/C Line Repair Tools



GTY-AC007

Refrigerant Halogen Leak Detector

Detects a wide range of halogenated gases, making it the go-to tool for all your refrigerant needs.
Stay informed with a color graphic display and audible alarms that signal leak levels in real-time.
Sensitivity of 0.14oz/yr, ensuring you catch every leak.



GTY-AC002

Automobile Air Conditioner Cleaning and Recycling Filling Machine

Microcomputer control, fully automatic
Modular design, stable work, easy to maintain user-friendly interactive interface, simple operation pulse cleaning/automatic recovery/regeneration/storage automatic/manual discharge of old oil (electronic control)
Automatic/manual refill (electronic control)
Quantitative filling of refrigerant
Built-in database, printer, a variety of equipment maintenance functions
Input voltage: AC220V/6A AC110V/10A
Compressor: 16CC
Vacuum pump: 42.5L/Min, 5Pa
Load cell: 50kg 10g/2.6kg 10ml
Maximum working pressure: 20Bar
Pressure gauge: 35bar/25bar



GTY-AC004

Air Conditioner Cleaning Bottles

AC flush kit, A/C air conditioner system flush canister kit clean tool set R134a, R12, R22, R410a, R404a, for auto car



GTY-AC006

R134a Valve Core Disassembly-free Tool

Fit for: removing different valve core without release therefrigerant.
Includes red HP and blue LP tools.



GTY-AC008

Air Conditioner Refrigeration Oil Filter (small set)

High density filter screen effectively filters impurities in a conditioning pipelines, improving cooling efficiency.
Quickly check the content and acidity of the cooling oil to determine the amount and quality of replenishment.
Can be disassembled separately, easy to clean.



GTY-AC009

R134a Environmental Protection Refrigerant Meter

Complete diagnostic and service gauge set for use on air conditioning systems with R134a freon.
Sight glass manifold with three 60" color-coded hose.
High pressure:0-800 psi,0-55bar.
Low pressure:0-500 psi,0-35bar.
Vacuum:0-30in/Hg



GTY-AC011

R134a Environmental Protection Refrigerant Meter

Complete diagnostic and service gauge set for use on air conditioning systems with R134a freon.
Sight glass manifold with three 60" color-coded hose.
High pressure:0-800 psi,0-55bar.
Low pressure:0-500 psi,0-35bar.
Vacuum:0-30in/Hg



GTY-AC013

High-precision Fluoridation Scale For Refrigerant Air Conditioner

High precision sensors, clear and intuitive large screen display, aerospace materials that are resistant to drops and durable, low power consumption



GTY-AC015

536G Refrigerant Meter

R12, R22, R134a, R502, manifold gauge set HVAC A/C refrigeration charging service.
Sight glass manifold with three 35" color-coded hose.
High pressure:0-500 psi,0-35kg/cm².
Low pressure:0-250 psi,0-17.5kg/cm².
Vacuum:0-76in/Hg.



GTY-AC010

R134a Environmental Protection Refrigerant Meter

Complete diagnostic and service gauge set for use on air conditioning systems with R134a freon.
Sight glass manifold with three 60" color-coded hose.
High pressure:0-800 psi,0-55bar.
Low pressure:0-500 psi,0-35bar.
Vacuum:0-30in/Hg



GTY-AC012

Set Of 3 Vacuum Cooling Systems

Color blue/red Keyword Universal Radiator Pressure Tester
Quality High-Quality
Delivery time 30-45days
Certification ISO



GTY-AC014

Car Headlight Renovation Kit

Material: Stainless Steel
Included:
1 x atomizing cup
1 x lid
1 x power supply adapter
1 x 800ml fluid
A roll of tape
1 x sealing ring
1 x sponge
6 x sandpapers
Packing Size: 36*28*12.8CM
Weight: 23.7kg



GTY-AC016

Tire Pressure Gauge

1.Colors: Black
2.Units: PSI/kg/cm²



GTY-A1028

Hand-Held Vacuum Pump Kit

Attach many kinds of joint to fit most kinds of vehicles.
The body has the switch to control two kinds of pressure conditions.
Include the parts of brake bleeder.
Pressure range:positive pressure.0~60psi(1~4inhg)
Negative pressure.0~-30psi(0~-1inhg)



GTY-A1035

Hand-Held Vacuum Pump Kit

Attach many kinds of joint to fit most kinds of vehicles.
The body has the switch to control two kinds of pressure conditions.
Include the parts of brake bleeder.
Pressure range:
positive pressure 0~60 psi (1~4inhg)
negative pressure.0~-30 psi (0~-1inhg)



GTY-B1001B

18PCS Positive & Negative Caliper Wind Back Kit

Winds back brake piston for replacing brake pads.
For rotating pistons back into the caliper to provide clearance for new pads Prevents damage to the piston and boot Magnetic right and left side spindle adapters.
Designed for use with many vehicles, including GM, Audi, Austin, BMW, Ford, Honda, Jaguar, Mercedes Benz, Mitsubishi, Nissan, Rover, Toyota, VW, Mazda, Saab, Subaru, Renault, and Opel.



GTY-B1022

22pcs Universal Caliper Wind Back Kit

Suitable for push back and wind back brake pistons.
Helps prevent damage to pistons and seals.
Updated adaptor set suitable for a wide variety vehicles.
Supplied in carry-case.



GTY-A1031

Hand-Held Vacuum Pump Kit

Attach many kinds of joint to fit most kinds of vehicles.
The body has the switch to control two kinds of pressure conditions.
Include the parts of brake bleeder.
Pressure range: positive pressure.0~60psi (1~4inhg)
negative pressure. 0~-30psi (0~-1inhg).



GTY-B1001

5PCS Universal Brake Caliper Rewind Tool Kit

Adjustable 2pin adaptor fits 100 style of cars.
Adjustable 3pin adaptor only to be used with electronic park brake(EPB) tools.
Applications include: Audi, BMW, Iveco Daily, Renault, Range Rover, Seat, V.W, Volvo, ect.



GTY-B1001E

21PCS Universal Caliper Wind Back Kit

Suitable for push back and wind back brake pistons.
Includes left- and right-handed thrust bolt assemblies.
Left-handed thrust bolt required for Ford, Citroen and Renault applications.
Adaptor plates with thrust bolt assembly and reaction plate.
Helps prevent damage to pistons and seals.
Updated adaptor set suitable for a wide variety vehicles.
Supplied in carry-case.



GTY-BN7010

35PCS Universal Caliper Wind Back Kit

Suitable for push back and wind back brake pistons.
Includes left- and right-handed thrust bolt assemblies.
Left-handed thrust bolt required for Ford, Citroen and Renault applications.
Adaptor plates with thrust bolt assembly and reaction plate.
Helps prevent damage to pistons and seals.
Updated adaptor set suitable for a wide variety vehicles.
Supplied in carry-case.



GTY-BN7011

35PCS Universal Caliper Wind Back Kit

Suitable for push back and wind back brake pistons. Helps prevent damage to pistons and seals. Updated adaptor set suitable for a wide variety vehicles. Supplied in carry-case.



GTY-BN7017

23pcs Universal Caliper Wind Back Kit

Includes a pneumatic gun, the traditional adaptors and all the latest adaptors for: VW Passat (from 2005) Ford Iveco Daily BMW Mini/BMW Renault Laguna III/Scénic III Renault Master III For left or right handed threaded pistons



GTY-NA1047

Disc Brake Piston Tool

For removal or installation of axle uts. 1/2" Drive 6 point design. Size: 29.30.31.32.33.34.35.36 & 38mm.



GTY-B1013C

Disc Brake Piston Separator

For fully floating caliper with single or double piston or for fixed caliper with two pistons. This tool allows quick and clean pressing back of caliper pistons into caliper housings without damaging to seal or caliper piston. Work range: 15-83mm Disc size: 51x60mm Material: Carbon Steel



GTY-BN7016

16PCS Universal Caliper Wind Back Kit

Includes left and right-handed thrust bolt assemblies. Left-handed thrust bolt required for Ford, Citroen and Renault applications. Kit helps prevent damage to piston and seals. Applications: Alfa Romeo, Audi, BMW, Citroen, Fiat, Ford, GM, Honda, Jaguar, Lancia, Lincoln, Mazda, Mitsubishi, Nissan, Opel, Peugeot, Proton, Renault, Rover, Saab, Seat, Subaru, Toyota, Vauxhall, VM, Volvo.



GTY-BN7040

40PCS Universal Caliper Wind Back Kit

Comprehensive brake caliper wind back kit designed for brake pad and caliper servicing. Updated master set of adaptors for a wide range of vehicle applications. Suitable for push-back and wind-back brake pistons. Includes left- and right-handed thrust bolt assemblies. Left-handed thrust bolt required for Ford, Citroen and Renault applications. Precision made adaptor plates with thrust bolt assemblies and reaction plates. Kit helps prevent damage to pistons and seals.



GTY-B1000

2&3 Pin Adjustable Brake Caliper Rewind Adaptors

Two adjustable brake caliper rewind adaptors which fit hundreds of cars. Can be used with a standard 3/8" square drive ratchet. Capacity 20-35MM



GTY-B1013B

Disc Brake Piston Separator

Material: Hardened carbon steel jaws. Finish: Black finished and nickel plated bolts. 2pcs spread jaws, size: 115x50x6MM 1pc 100mm(4") sliding bolt. 1pc "T" type sliding bolt with 21mm hex head insert 1/2" SQ.



GTY-B1014A

4-1 Brake Caliper Press

Extended Reversing lever allows for easy change from spreading to retracting. Works on twin and quad piston calipers. Centrally located ratchet evenly spreads force in a parallel manner to prevent misalignment of pistons. Ratchet technology gives a full 360 degree swing so that the spreader may be placed at any position.



GTY-B1015

Universal Clutch Alignment Tool

Alloy body with steel clamp arm. Compact design allows use confined spaces. Suitable for use on fuel, vacuum and brake hoses.



GTY-B1059

Brake Caliper Piston Tool

For use on disc brake calipers fitted to most cars + adaptors No 1/2"



GTY-B7017

Brake Spring Compressor

Remove and install retaining springs 5/8 to 1 1/16" in diameter on small car drum brakes. Small socket fits into tight places. Special socket grips retainer washer. Push and turn to remove or install.



GTY-B1014B

Ratcheting Brake Caliper Piston Tools

Designed for floating calipers fitted with single or twin piston. Also for fixed calipers fitted with twin or quad pistons. Ratchet mechanism provides speed and versatility saving time and money. Spread Range: 1-9/16"(39.69mm) to 2-5/8"(68.67mm)



GTY-B1051

Disc Brake Piston Remover

Removes and installs disk brake pistons. Rotates piston back into caliper cylinder. Use on most imports, ford, chrysler and gm cars with four wheel disc brakes. Use with 3/8" Sq drive ratchet wrench and extension bar. Suitable for vehicles with discs all round. Retracts parking brake piston prior to installation of new pads. Five possible pin configurations, fit US and european applications.



GTY-B1071

Pocket Brake Fluid Tester

The tester can be as a digital brake fluid tester suitable for determining brake fluid quality. Quality is tested and indicated on five LEDs in terms of "per cent of water in the brake fluid". LED display: Green: no water-OK. Yellow: less than 1% water-Warning. Yellow/yellow: approx. 2% of water-Warning. Yellow/yellow/red: approx. 3% of water. The oil should be changed. Yellow/yellow/red/red: at least 4% of water. Change the oil urgently.



GTY-BN7019

Disk Brake Pad Spreader

Heat treated and black finished. Pro-style handle for better grip. Easily removes window molding clips. Works on various cars.



GTY-BN7020

Drum Brake Spring Pliers

For riveted and glued brake linings on drum brake with movable claw, easily removes and installs shoe return springs on most drum brakes. Chrome plated.



GTY-B1088

Brake Thread Repair Kit M12X1.5

Quick and effective method of replacing brake threads. Features one alignment plate for precision drilling.

- 10 pcs thread replacers
- 2 pcs washers
- 1 pc step drill
- 1 pc insert locator
- 1 pc M12x1.5mm tap
- 1 pc drill guide plate



GTY-N1802

8PC Brake Tool Sets

- 1 pc brake spring installer, 1 pc spring removal tool
- 1 pc brake spring pliers, 1 pc spring compressor
- 1 pc spring removal tool, 1 pc brake adjustment spoon
- 2 pc brake retaining spring tool



GTY-B2501

Riveters

Exact positioning of the brake line in the device using a spacing adapter. Application on brake and hydraulic lines directly on vehicles.



GTY-B1087

Brake Thread Repair Kit M9x1.25

- 10 thread replacers
- 1 step drill
- 3 drill guide plate (for VAG, Opel, Ford)
- 1 hand tap
- 1 hexagon wrench



GTY-B1089

Brake Bleeder Rubber Adapter

Suitable for most vehicle brake bleeder fittings.



GTY-N1805

15PCS Brake Service Kit Sets

For both disc and drum systems. Use for adjustment, installation and removal. Includes drum brake adjuster, brake spring pliers, universal brake shoe and more. Blow-molded case with easy-use reference card.



GTY-A2051

Press and Pull Sleeve Kit

Universal tool set for extracting and drawing in: Silent bearings, hydraulic bearings, bearing bushes, ball bearings, shaft seals, rubber bearings, etc. Fully universal application. Ideal for different vehicles. Cars + HGVs. Depending on requirements, the particular sleeves can also be individually reworked (e.g. recess, etc.) Application also with workshop press + press frame. 22 x press-on sleeves. Inside: Diameter 34, 36, 38 - 70, 72, 75, 80mm. Outside: Diameter 44, 46, 48 - 80, 82, 85, 90mm. 5 x step discs. 5 x pulling spindle + nuts. Sizes: M10, M12, M14, M16, M18.



GTY-A3101

VW, AUDI Rear Suspension Tool

Special designed for replacing the rear axle mounting bushes, whilst in site on the vehicle and without the need for removing the rear axle assembly. It's fine thread and thrust bearing the bush to be fitted quickly and easily without causing damage. Operation on car. Applicable: Audi A3/ VW Golf IV/ Bora 1.4/ 1.6/ 1.8/ 2.0 and 1.9d(2001-2003).



GTY-B1039

Interchangeable-fork Coil Spring Compressor Set

Interchangeable-Fork Spring Compressor are multi-application tools. Specifically developed for modern macpherson suspensions, using a range of 3 sets of interchangeable monobloc forks. Application: BMW, Toyota, Ford, Mitsubishi, VW, Audi, Saab, Nissan, Honda, Accord, Subaru, Volvo, Opel, Porsche. Spring specification: φ115 ~ φ80 Jaw Size (65-125MM), φ150 ~ φ110 Jaw Size (88-160MM), φ195 ~ φ140 Jaw Size (126-212MM).



GTY-B1040

Universal Front Hub & Bearing Installer Set

To replace front wheel bearing without removing the steering knuckle & strut assembly. As the spindle assembly is not removed, there is no need to align front end after the job is done. Saving a lot of time. Drift Sizes: 55, 59, 62, 65, 66, 71, 5, 73, 78, 84, 86, 91mm. Hub Screws (3pc each): M12X1.5, M14X1.5MM. Can fast assembly and disassembly of wheel bearing and wheel hub. Applicable for all usual vehicle types. Adapter 55.5 84mm. INNEN-UND Outer Puller 76 - 91MM. Spindle 295mm.



GTY-NA1019

Coil Spring Compressor Set With Cover

Contents & application:
1 Main Body
1 Extended Bracket
3 pairs Jaws
3 Pairs Jaw Cover
Suit for BMW, Toyota, Ford, Mitsubishi, VW, Audi, Saab, Nissan, Honda Accord, Subaru, Volvo, Opel, Porsche



GTY-A3102

OPEL Rear Suspension Bush Removal Tool

For removing and replacing rear upper and lower bushes on trailing arm suspensions. Applicable: Opel Vauxhall, Vectra model.



GTY-B1039B

Interchangeable-fork Coil Spring Compressor Set With Cover

Interchangeable-Fork Spring Compressor are multi-application tools. Specifically developed for modern macpherson suspensions, using a range of 3 sets of interchangeable monobloc forks. Application: BMW, Toyota, Ford, Mitsubishi, VW, Audi, Saab, Nissan, Honda, Accord, Subaru, Volvo, Opel, Porsche. Spring specification: φ115 ~ φ80 Jaw Size (65-125MM), φ150 ~ φ110 Jaw Size (88-160MM), φ195 ~ φ140 Jaw Size (126-212MM). With 6 protective covers protect customers beautiful shock absorber as repairing.



GTY-B1041

Wheel Bearing Removal Tool Kit

Heavyweight drive screw for use with impact tools. This set reduces the chance of damage to hub and bearing. Heavy duty steel drifts, phosphate coating prevents corrosion. Also suitable for removing and installing large industrial bearings. Drive shaft: 32mm & 38mm. Drift sizes: 50, 55, 60, 64, 67, 70, 72, 74, 75, 78, 82, 84, and 88mm.



GTY-B1060

Mercedes Benz Coil Spring Compressor Set

Types 116/123/124/126/129/140/201/202 and 4-matic includes.
Advantage: Newly developed automatic 3-point safety interlock and automatic freewheel at end of stroke.



GTY-B1063

Universal Bush Remove And Install Sleeve Set

Universal application of step discs for bearing bush, silent bearing, hydraulic bearing, and rubber bearing on many kinds of different vehicles.
Package: Blow Case



GTY-NA1011

Tool Set For Compact Wheel Hub/Bearing Unit

Bearing Unit, $\Phi 62$ mm, $\Phi 66$ mm, $\Phi 72$ mm.
Application: Audi A2, Audi 1.2L, VW Polo, FOX, Seat, Ibiza, Skoda, Fabia.



GTY-NA1021

Extra Large Custom Built Bush/Bearing/Seal Driver Set

This extra large driver set allows you to build your own custom bushing driver.
Select the required sizes and assemble your driver tool.
Discs are connected with a shaft and screw which connects to the driver handle.
Build to suit the required seal bush or bearing job.
Disc size: 70mm through to 150mm in 5mm increments.



GTY-B1061

Universal Bush Remove And Install Sleeve Set

Universal application of step discs for bearing bush, silent bearing, hydraulic bearing, and rubber bearing on many kinds of different vehicles.
20pcs sleeves: ID $\phi 34, \phi 72$ mm (in 2mm increment).
2pcs step discs: use with sleeves.
4pcs bolts: M10, M12, M14, M16; Length: 450mm



GTY-BN7013

Compressor Clutch Remove Kit

Replaces clutches found on Fs6, C171, 6P & 148 compressors, GM R4 & A6, Hr6, DA-6 & V5 A/C compressors, sanden compressors Sd505, 507, 510, 575, 708 & 709, etc....



GTY-NA1018

BALL JOINT INSTALLER & REMOVER-BMW 3 SERIES

A professional quality tool designed for using in situ to enable the easy removal and insertion of press fit control arm ball joints.
Suitable for using on BMW 3 series (E36) models.
Fine pitch thread drive screw with thrust bearing.



GTY-NA1027

Screw Pivot Bush Installer/Remover-Benz, BMW

Removing/installing safely and labor-saving by using hydraulic.
Various parts for widely use.



GTY-NA1045

BMW Rear Axles Bush Remover/Installer

Removal and replacement tool for metallic bushes on rear axles BMW type E36, E46.
Replacement of the mounting bushes without removing the complete rear axle assembly.
Applicable: BMW E36, E46, E85



GTY-NA1053

VW Suspension Bush Tool (Polo)

Polo from 2002 onwards.
Replacements are available for the Bolt and Bar which are considered consumable.
Applicable: VW, POLO 2002 later.



GTY-AN7036

Tail Pipe Expanders Set

Drop forged, heat-treated steel, designed quickly and easily straighten out clamp dent in mufflers and tail pipes.
A simple wrench turn expands pipe for exhaust system repair and installation.
Works with all 1-1/8" to 3-1/2" ID, thin-wall pipes.
Small expander: 1-1/8" to 1-3/4"
Medium expander: 1-1/2" to 2-1/2"
Large expander: 2-1/8" to 3-1/2"



GTY-NA1046

Front Wheel Bearing Tools

Bearing size: 72mm Suitable for:
Audi: A2 models after 2000
VW: Polo, Fox models after 2005 seat: Ibiza models after 2002.



GTY-NA1067

31PCS Wheel Bearing Removal Tool Set

For most wheel bearings allows disassembly and assembly of the wheel hub and the wheel bearings includes the following tools:
pressure plates with diameters of: 50 - 55 - 59 - 63.3 - 66.6 - 70.3 - 71.5 - 73.1 - 73.4 - 74.8 - 77.5 - 81.5 - 83.4 mm
sleeves with following diameters: 76 - 86 - 91 - 102 mm
3 extractor bolts M12 x 1.53
extractor bolts M14 x 1.5
spindle 22.2 mm x 300 mm (including thrust bearing)
drive external hexagon SW 38
pressure nut 32 x 60 mm
pressure sleeve $\Phi 38$ x 40 mm, pressure disk $\Phi 40$ x 3 mm



GTY-B1002A

**Coil Spring Compressor
(Chrome Plated)**

Hardened and tempered precision machine steel screws
The tool is designed for use in limited space under wheel arch.
Special designed claws to wrap on coil claws safety
Size: 270mm & 370mm.
Chrome Plated



GTY-B1002E

Coil Spring Compressor

10"bolt length (maximum height of removable spring is 9 1/2").
Drop forged enamel body.
Material:45# steel.
Professional quality
Easy to use



GTY-B1002H

Coil Spring Compressor

Use tool to remove and install automotive coil springs up to 5-5/8" O.D.
Designed to grasp a maximum 3/4" wire diameter spring.
Compressor can be used on straight or curved coil springs.
Forged alloy steel arms hug contour of helix.



GTY-NA1063

Universal Press Support

Through the height adjustable bolts a fixture and vibration safe 3 level points construction is created.
The amount and arrangement at thread enable the conformity to almost every component surface.
Includes lateral safety device.



GTY-B1002B

**Coil Spring Compressor
(Black Finished)**

Hardened and tempered precision machine steel screws
The tool is designed for use in limited space under wheel arch.
Special designed claws to wrap on coil claws safety
Size: 270mm & 370mm
Black finished.



GTY-B1002F

Coil Spring Compressor

Material : carbon steel ,special material.
Surface finish:phosphating ,chrome plated, electrophoresis black,zinc.
Process : heat treatment , drop forged.
Size : 380mm.
Style : 4-jaw , Precision thread for rotating and labour-saving.



GTY-B1002K

Heavy Duty Coil Spring Compressor

Hook engage spring which can be compressed by turning hex nut.
Jaws capacity:23mm~280mm
Length:280mm



GTY-NA1064

Universal Coil Spring Compressor

Suitable for small to medium sized vehicles
Two sliding hooks on carrier rail prevent slipping
22mm spindle drive -load capacity:15,000N(1,500KG).
Not suitable for impact wrenches -VPA/GS approved



GTY-B1015A

Labor Saving Wrench Set

Length of canister body: 300mm.
Diameter of canister body: φ 73mm .
Total length: 360mm .
Size of square tenon of input and output end: 1" .
Maximum safe output: 5200-5800N. M(2066-2582FT-1B) .
Size of square tenon of two ends of adding pole: 1" .
Center distance of adding pole: 230mm .
Hole on square tenon of rocket: 1" .
Trans-Speed ratio 1:58.



GTY-B1015F

Labor Saving Wrench Set

Length of canister body: 270mm.
Diameter of canister body: φ 81mm .
Total length: 330mm .
Size of square tenon of input and output end: 1" .
Maximum safe output: 6200-6800N. M(2066-2582FT-1B) .
Size of square tenon of two ends of adding pole: 1" .
Center distance of adding pole: 200mm .
Hole on square tenon of rocket: 1" .
Trans-Speed ratio 1:68.



GTY-B1015H

Labor Saving Wrench Set

Length of canister body: 310mm.
Diameter of canister body: φ 73mm .
Total length: 370mm .
Size of square tenon of input and output end: 1" .
Maximum safe output: 5200-5800N. M(2066-2582FT-1B) .
Size of square tenon of two ends of adding pole: 1" .
Center distance of adding pole: 240mm .
Hole on square tenon of rocket: 1" .
Trans-Speed ratio 1:58.



GTY-B1024B

Wheel Weight Tool

Easily remove and replaces wheel weights as well as cutting and crimping.
Made of heat strengthened steel.
Included comfortable vinyl handle grips.
With self-open function spring on the handle for easier operation.



GTY-B1015B

Labor Saving Wrench Set

Length of canister body: 270mm.
Diameter of canister body: φ 73mm .
Total length: 330mm .
Size of square tenon of input and output end: 1" .
Maximum safe output: 5200-5800N. M(2066-2582FT-1B) .
Size of square tenon of two ends of adding pole: 1" .
Center distance of adding pole: 200mm .
Hole on square tenon of rocket: 1" .
Trans-Speed ratio 1:58.



GTY-B1015G

Labor Saving Wrench Set

Length of canister body: 300mm.
Diameter of canister body: φ 81mm .
Total length: 360mm .
Size of square tenon of input and output end: 1" .
Maximum safe output: 6200-6800N. M(2066-2582FT-1B) .
Size of square tenon of two ends of adding pole: 1" .
Center distance of adding pole: 230mm .
Hole on square tenon of rocket: 1" .
Trans-Speed ratio 1:68.



GTY-B1024A

Wheel Weight Tool

Easily remove and replaces wheel weights as well as cutting and crimping.
Made of heat strengthened steel.
Included comfortable vinyl handle grips.
With self-open function spring on the handle for easier operation.



GTY-BF1001

Tire Gauge

Materials: Head: ABS 'metal look'. Body: Aluminium
Materials: Head: iron Body: Aluminium
Materials: Head: kirsite. Body: iron
Materials: Head: kirsite. Body: Aluminium
Materials: Head: kirsite. Body: copper
Content: zinc alloy body colour matte, with chrome plated friction ring, acrylic lens.(Vibrant Coloue)



GTY-BF1004
Tire Inflating Gun

Rubberized 2" gauge displays tire pressure readings from 10 to 220 PSI in two pound intervals. Dual head chuck reaches stems on inner dual wheels. Paddle trigger for precise control. Bleed-off button resets gauge to 0. Scales: PSI, kg/cm², kPa and bar.



GTY-BF1019
High Precision Digital Tire Inflating Gun

Heavy duty design with anti-shock rubber cover. With air release button. With backlit LCD display with four units (psi, bar, kg/cm² and kPa) switchable. 2 x AAA LR03 alkaline batteries are included and >10,000 cycles battery lifespan. Range: 5 to 220psi (0.5 to 15bar). Accuracy: +/- 1% F.S. Resolution: 0.5 (0.05). Operation temperatures: -25 to 50°C. Temperature compensation. PU Hose ID 8MM WP.180PSI /12 BAR .



GTY-BF1040
Dial Truck Tire Gauge

2" dial gauge
Steel case with rubber cover, and ring, acrylic window, straight chuck, flexible hose
Pressure range: 10-60 psi or 10-160 psi.



GTY-BF1053
Air Chuck

Air chuck with rubber handle.
Material: zinc alloy head, metal tube, rubber handle.
The hose barb can be changed to different threads according to different market needs.
Packing: colour box or blister packing.



GTY-BF1005
Tire Inflating Gun

Aluminum die-cast body.
2" dial type gauge with rubber protector.
Fitted with single clip-on connector.
Pressure range: 0-220psi.



GTY-BF1035
Dual Foot Tire Gauge

Chrome-plated Zinc head, metal tube.
4 side plastic bar.
Pressure range: 10-200psi or 20-120psi.



GTY-BF1042
Dial Truck Tire Gauge

Zinc alloy case and chuck, chrome plated ring, acrylic window.
With pressure holding button.
Pressure range: 10-60 psi or 0-100 psi.



GTY-BF1054
Pencil Tire Gauge

Deluxe type: Chrome-plated Zinc head, metal tube.
2 side steel bar.
Pressure range: 10-200psi.



GTY-BF1055
Digital Tyre Tread Depth Gauge

Digital tread depth gauge with metric and imperial calibration and conversion between the two. The clear LCD delivers easier reading, and the zero setting function allows for comparative measurement. The measuring range is 0 - 25mm/0 - 1" with an accuracy of ±0.01mm/0.00039". Supplied with SR44 battery.



GTY-BF1041
Professional Air Line Gauge

Range: 0-9.5bar (0-140psi)
Air supply min: 6.9 bar (100 psi)
AIR supply max: 13.8 bar (200 psi)
Inlet: 1/4" BSP female



GTY-BF1013
Digital Tire Pressure Gauge

Specification:
Long-life lithium battery.
Accurate from 5-99psi, +/- 0.5psi at 75%.
Scale selection BAR, KPA, SI
Auto LCD power off.
Plastic body.
Simple one button operation.



GTY-BF1058
TR412 Snap-in Rubber Tire Valve Stem

Replace worn out valve stems.
Designed for 0.453" (11.5mm) rim hole
Length: 7/8"
Material: rubber, brass



GTY-BF1056
Brake Disc & Tyre Depth Gauge

- Vernier style disc measuring tool combined with depth gauge; 0 - 60mm range.
- Clamping screw to easily retain reading.
- Special Jaw release mechanism allows reading of the brake disc to be retained without releasing the clamping screw.
- Compact size allows for access in tight spaces.



GTY-BF1008
Digital Tire Pressure Gauge

4 Units change:
PSI (2-100)
BAR (0.2-7)
KPA (20-700)
KG/CM² (0.2-7)
Back-lit LCD for easy viewing in dark environments.
Uses (5) AG13 Lithium batteries (included).



GTY-BF1057
TR414 Rubber Tire Valve Stem

Simple snap-in installation.
Designed for Rim hole 0.453" (11.5mm)
Length: 1-1/2"
Manufactured of brass and ozone-resistant rubber.



GTY-BF1059
TR413 Rubber Tire Valve Stem

Simple snap-in installation.
Designed for Rim hole 0.453" (11.5mm)
Length: 1-1/4"
Manufactured of brass and ozone-resistant rubber.



GTY-NB2501
Stationary Wiper Puller

Car wiper removal tool
Screw bayonet :15.6mm
Starting gap :26mm
Material: Alloy steel heat treatment :HRC32-35



GTY-NB2503
Movable Wiper Puller

Car wiper removal tool
Bidirectional adjustment of the distance between the two Jaw, more flexible than the fixed, larger space two Jaw travel range :8-42mm
Hook length :36mm
Material: Alloy steel heat treatment :HRC38-429



GTY-NB2505
Quick Release Hub Wing Nut Wheel Balancer

Balance quick nut specifications:
36mm×3mm 40mm×3mm
38mm×3mm 40mm×4mm
36mm×3mm + Pressure Cup
38mm×3mm + Pressure Cup
40mm×3mm + Pressure Cup
40mm×4mm + Pressure Cup

Size:28*11*6cm / 28*12.8*12.8cm
(Includ pressure Cup)



GTY-NB2507
Folding Glass Broach

The product design is reasonable, handle aluminum color oxidation, elegant atmosphere, blade extension length can be freely adjusted, with good practicability, used for famous windshield disassembly



GTY-NB2502
Handle Wiper Puller

Car wiper removal tool
Material: Alloy steel
Starting gap : 24mm



GTY-NB2504
Seal Puller

Removes oil seal without damage.
Two hook sizes to fit most seal applications.



GTY-NB2506
Glass Rubber Strip Broach

This product is used for all kinds of windshield disassembly by broach fast, easy to cut the windshield sealant.
Material: Aluminum



GTY-NB2508
Folding Glass Broach

This product is used for disassembly and assembly of various windshields. It can be quickly removed with this tool. The handle is made of plastic.



GTY-NB2509
Wire Rope Lead

Designed for quick removal of windshield sealant with easy and flexible insertion of wire rope via polyurethane.
Material: Spring steel
Heat treatment :HRC42-45
Application range: 0-1.5mm



GTY-NB2511
Windshield Removal Hook Knife

For all kinds of windshield disassembly, by broach fast, easy to cut the windshield sealant



GTY-NB2513
Tire Depth Gauge

A measuring tool used to measure the depth of tire grooves, mainly to detect the wear of automobile tires.
Measuring range :0-30mm
Accuracy :0.1mm
Dimensions :56x5x90mm



GTY-NB2515
Brick Jointer

For a professional finish to joints between bricks
Heavy duty design
High quality steel
Sizes clearly engraved onto tool



GTY-NB2510
Seal Strip Installer

It is an installation tool for sealing strips, three strips and core strips. It is a sealing strip disassembly tool with convenient operation and good efficiency.
Overall dimensions 200*70



GTY-NB2512
Windshield Remover Kit

Seven-piece(including spare parts)tool set for windshieldremoval:
1pc wire-sawglassremover
1coil Steel wire green coil
1pc Glass rubberbroach;1pcbroach(spare parts)
1pc Bucklescrewdriver
1pc decorativewireinsertionremoval tool
1pc wire rope lead



GTY-NB2514
Brake Spring Pliers

It is used to tighten the brake book to facilitate the installation and adjustment of brake pads, and can easily load and unload the return spring yellow on the drum brake.



GTY-NB2516
ABS Suction Cup

Handle thickness: 5.5mm
Material: ABS+ rubber sole
Specification: Thickened metal core
Packing: pp bag of 50 PCS per bag
Box size: 45*23*40cm



GTY-GL001

Pistol Grip Handle Reamer/Pluggger

Item No: CH-A01
Pistol grip handle
Reamer/Pluggger
It is suitable for the emergency repair of tire



GTY-GL003

T Handle Reamer/Pluggger

T handle Reamer/Pluggger
It is suitable for the emergency repair of tire



GTY-GL005

T Handle Reamer/Pluggger

T handleReamer/Pluggger
It is suitable for the emergency repair of tire



GTY-GL007

8pcs Tire Repair Tool Kit

8PCS
Tire repair kit
1PC Pistol handle front eye open pluggger
1PC Pistol handle screwdriver probe
1PC Glue
5PC string dia.
Master carton Qty: 96 PCS
Master carton Size: 47.5x47x41 cm
G.W/N.W:20/19 kg



GTY-GL002

T Handle Reamer/Pluggger

T handleReamer/Pluggger
It is suitable for the emergency repair of tire



GTY-GL004

T Handle Reamer/Pluggger

T handleReamer/Pluggger
It is suitable for the emergency repair of tire



GTY-GL006

Straight Handle

Straight handle
It is suitable for the emergency repair of tire



GTY-GL008

11pcs Tire Repair Tool Kit

11PCS
1PC T-handle for drilling,
1PC T-handle for inserting the vulcanizing strip
2PCS spare metal tips
1PC Allen wrench
5PCS vulcanizing strips
1PC Glue



GTY-GL009

26pcs Tire Repair Tool Kit

26PCS
Tire repair kit
1PC Metal T-handle front eye open pluggger
1PC Metal T-handle screwdriver probe
20PC String dia
1PC Hex key
2PC Replaceable Pluggger and probe needles
1PC Glue
1PC Plastic box



GTY-GL011

14pcs Bicycle Tire Repair Tool Kit


Master carton Qty: 60/240PCS
Master carton Size:46x35x60cm
G.W/N.W:20/19kg
Configuration table
5pc Cold patch
1pc Rectangle patch 52x32mm;
2pc Small rectangle patch 35x24mm;
2pc Round patch 25x25mm
2pc Valve cap
2pc Rubber tube
1pc Metal rasp
1pc Glue
1pc Wrench
2pc Metal tire pry bar



GTY-GL013

11pcs Bicycle Tire Repair Tool Kit

QTY:
MEAS:60/240PCS 29x22.5x25cm
G.W/N.W: 5.6/4.6kg
Configuration table
5pc Cold patch
1pc Rectangle patch 52x32mm;
2pc Small rectangle patch 35x24mm;
2pc Round patch 25x25mm
2pc Valve cap
2pc Rubber tube
1pc Metal rasp
1pc Plastic case



GTY-GL010

27pcs Tire Repair Tool Kit

Tire repair kit
1PC Metal T-handle front eye open pluggger
1PC Metal T-handle screwdriver probe
1PC Knife
20PC String dia 8"
1PC Valve core screwdriver
1PC Lube oil
1PC Plastic box
1PC Allen key
Master carton Qty:10pcs/ctn
Master carton Size: 57.4x29.5x20.5 cm
G.W/N.W:11/10.4KGS/CN



GTY-GL012

9pcs Bicycle Tire Repair Tool Kit

Master carton Qty:12PC/inner box 24 PC/CTN
Master carton Size: 32.5x25x24cm
G.W/N.W:2.54/1.82kg
Configuration table
1pc Glue
1pc Sandpaper 69x31mm
1pc 7.5cm Chalk
1pc Rectangle patch 50x30mm
4pc Rectangle patch 33x25mm
1pc Plastic case



GTY-AN2518

Smoke Leak Detector

Material: Stainless Steel+ABS Power: 12V Car Battery,
Amount of Smoke: 12-18 liters/minute,
Flow Control: Built-in,
Pressure Control: Built-in,
Refill Once: 15 minutes
Output Pressure: 10-18 psi,
Output Flow: 10-20L/min
Air supply Made: Built-in air pump
Smoke leakage detector is specially designed for
pipeline leakage detection in automobile intake system



GTY-AN2520

The Mechanic's Work Mat Folded-23mm

Mechanic's Work Mat Folding-23mm
Material: EVA
Folding size: 455*200*138mm,
Product size: 1200*455*23mm
Density: 40kg/m³,
Color: black/blue (Pantone#300C)
Printed with white SATRA logo and S-12MWM
1pc/ Heat shrink +SATRA Color card



GTY-AN2522

Automobile Pipe Smoke Leak Detector

Voltage :DC12V
Test tube :1.8m
Power cable :1.6m
Smoke output :<12L/Min,
Adjustable test pressure :<1.2bar
Pressure gauge :2bar
Fume filling capacity :15~35m1
Air source: Built-in air pump
Package size (LxWxH):322x237x167mm
Gross weight :~2.4kg
Current :5A



GTY-AN2524

Intelligent Ultrasonic Cleaning Machine

Voltage :AC220V2A/AC110V5A
Heating power :100-200w
Ultrasonic power :60w
Operating temperature :0~60°C
Cleaning temperature :20~80°C
Nozzle/pump detection power :60wLCD
Display: 1.8-inch, color cleaning tank capacity :2L
Package size (LxWxH):255x245x290mm
Gross weight :~4.1kg



GTY-AN2519

Diesel Vehicle Turbocharger Bypass Valve Pressure Test Table

Diesel vehicle turbocharger
bypass valve pressurizing tool
Suitable for Shaanxi Automobile
Heavy Duty Truck Liberation
Weichai Yuchai Xichai



GTY-AN2521

Smoke Leak Detector

Voltage :DC12V
current :5A
Test tube :1.8m
Power cable :1.6m
Smoke output :<12L/Min
Test pressure :<1.2bar
Fume filling capacity :15~35ml
Air source: built-in air pump
Package size (LxWxH):300x223x127mm
Gross weight :~2.0kg



GTY-AN2523

Automobile Pipe Smoke Leak Detector

Voltage :DC12V
Current :6A
Test tube :1.8m
Power cable :2.5m
Smoke output :<15L/Min,
Adjustable test pressure :<1.2Bar/~3.5KPa(0.5psi)
Pressure gauge :2Bar/16KPa
Fume filling capacity :15~35m1
Air source: Built-in air pump
Package size (LxWxH):480x255x380mm
Gross weight :~8kg



GTY-AN2525

610mm Technician Straight Edge S-HMF

610mm Technician's Straight Edge
Material: 45C
Surface treatment: black
Size: 610x50x6mm



GTY-A1002

TU-113 Oil Combustion Spraying Pressure Meter Kit

Gauge reads 0-100 psi,0-7bar.
Fits most systems(except for bosch,cis-jetronic
and gm throttle body systems).



GTY-A1004

TU-15 Cylinder Pressure Meter For Diesel Truck Kit

Quick connect/disconnect feature allows
one gauge to be used with variety of quick
adapters for most popular diesel engines.
Push pressure scale: 0-1000PSI/0-70Bar.



GTY-A1006

TU-1 Professional Vacuum&Fuel Pump Tester Kit

Large 3-1/2" diameter gauge with color-coded
easy-reading scales.
Extra long heavy-duty rubber hose and 14mm/18mm
manifold adapter.
Checks for worn or defective parts in fuel pumps,
vacuum system.



GTY-A1009

TU-3 Multiple-Function Cylinder Pressure Meter Kit

1. Best multiple-function cylinder pressure meter kit.
2. Suit for car repair tool.
3. 2.5 gauge with dual scale, reading from
0-300psi pressure relief valve allows repeated
on-vehicle test.



GTY-A1003

TU-114 Oil Combustion Spray Pressure Meter Kit

3" gauge with dual scale, reading from 0-150psi (0-10bar)
1. Copper adapters
2. Easy to carry
3. Environment protected
4. Fuel pressure gauge
5. Diagnostic tool



GTY-A1005

TU-12 Pressure Meter For Engine Oil Kit

Adapters for domestic & foreign cars.
24" flexible hose.
Pressure scale: 0-100 psi/0-700kpa.



GTY-A1008

G324 Compression Tester Kit

13" durable rubber hose with 14mm/18mm adapter.
Easy-reading 2-1/2" diameter gauge features
color-coded quadruple calibrations with 0-300psi,
21kg/cm, 21 bar & 2100 kpa.
6" heavy-duty stem with universal rubber cone.
Adapter fits all plug holes.



GTY-A1017

TU-15 Cylinder Pressure Meter For Diesel Truck Kit

Glow Plug Adaptor:
M10x1: 83/ 91/ 102/ 113/ 119,
M10x1.25: 64/ 135,
M12x1.25: 47MM,
M22x1.5: 118MM;
Injector Adaptor : M20x1,5 (75MM), M22x1,5 (73MM),
M24x1,5 (88MM), M24x2 (63MM),
Screw Adaptor 160MM, H-Fitting ,
Dial Gauge With Hose
(Diameter 14/6MM, Max 1000PSI With Bleed Valve)



GTY-A1027

TU-21 Cylinder Leak Detector Kit

Tester checks the amount of leakage in an engine cylinder & helps determine the source. Best used when comparing a suspect cylinder to a know good cylinder on same engine. Ideal for testing trucks & late model cars where clearance is minimal. Equipped with 2-1/2" input pressure gauge for proper leakage test setup and accurate results.



GTY-A1037

21PCS Water Tank Leak Detector Kit

1. Made from aluminum.
2. To test cooling system for leaks.



GTY-NA1066

27 PCS Radiator Pressure Tester (Multi-Function)

Functions: Radiator pressure tester, radiator lid tester, and vacuum purge & refill tool. Various adapters to meet most models. Material: Made of hard and durable Nylon66.



GTY-A1053

TU-11A Automatic Wave-Box Pressure Meter Kit

Designed to check engine oil pressure in both cars and trucks. Easy to read dual scale gauge. Complete with 24"(600mm) of oil proof hose with 1/8"NPT. Also includes 1/4"NPT and 3/8"NPT adaptors. Dual gauge readings: 0 to 300 psi (0 to 21 bar) Gauge diameter: 2.5"



GTY-A1036

14PCS Water Tank Leak Detector Kit

1. Test cooling system for leaks.
2. Includes hand pump, test head in a blowmold case.
3. Suit for: Nissan, Mitsubishi, Mazda Subaru, Toyota, Honda, Ford, GM, Chrysler, VW, Audi, Volvo, Saab, Mercedes Benz, BMW, Renault, Fiat, Alfa Romeo, Infiniti, Geo, Suzuki etc.



GTY-A1038

Cooling System Vacuum Purge & Refill Kit

To pump radiator and cooling system to vacuum by this tool. Use vacuum to fill with new coolant into radiator. Furthermore, do not remain air in radiator and cause bad circulation.



GTY-A1082

28-Piece Cooling System Tester Cooling System Pressure Device

Professional cooler tool set: includes a 28-piece universal radiator pressure test set and a negative pressure cooling system set, with radiator leak detector, coolant filling tool and thermometer for leak detection, coolant filling and temperature measurement.



GTY-A1054

Compression Tester Kit

1. Quickly and accurately check compression on petrol engines.
2. Thread sizes: M18x1.5, M14x1.25, M12x1.25, M10x1.0.
3. The material of the adaptors are made of cooper.
4. gauge read from 0-300psi & 0-2000kpa.



GTY-A1056

Petrol Enging Compression Tester Kit

Adaptive Inside: 10x1, 12X1.25, 14X1.25, 18X1.5. M10x18 Screw repair driver. M14x18 Screw repair driver.



GTY-A8037

Diesel Injector Flow Test Kit Common Rail Kit

Designed to measure rapidly and effectively the amount of fuel that every injector returns to the deposit tank, so it can identifies, worn, blocked or inoperative injectors quickly and easily. Master kit includes 24 pc adaptors to suit Bosch, Delphi & Denso injectors for comprehensive coverage of common rail diesel vehicles. Supplied with new type of quick-adapters.



GTY-AN7028

21PCS A/C Disconnect Tool Set

- For separating automotive air conditioning hoses and fuel lines on Ford and GM
- Includes:
 - 6pc. Fuel & Air Conditioning Line Disconnect Set: 5/16", 3/8", 1/2", 5/8", 3/4", 7/8"
 - 4pc. Spring lock coupler tools: 3/8", 1/2", 5/8", 3/4"
 - Fuel Line Disconnect Tool.
 - Ford Oil Cooler Line Disconnect Tool.
 - Ford Fuel Line Coupling Tool.
 - Ford/GM Quick Disconnect Tool.
 - 7pcs A/C, Fuel Line Disconnect Set.
 - Spare Rubber Bands.



GTY-AN7047

7PCS A/C Fuel Line Disconnect Tool Set

To easily disconnect air conditioning lines and connect fuel lines. Size: 1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 7/8"



GTY-A1063

12PCS Oil Pressure Tester Kit

Applications: Alfa, Audi, BMW, Citroen, Daihatsu, Fiat, Ford, Honda, Hyundai, Isuzu, Jaguar, Lada, Lancia, Land Rover, MAN, Matra, Mazda, Mercedes, Mitsubishi, Nissan, Opel, Peugeot, Renault, Rover, Saab, Skoda, Subaru, Suzuki, Toyota, Vauxhall, VW, Volvo.



GTY-A8045

Compression Pressure Gauge Zs (Diesel Engines), 0-70 Bar

The compression measurement is carried out through the glow plug or injector socket using adapters. Glow plug: M10x1 L-90mm, M10x1 L-119mm, M10x1, 25 L-135mm, M22x1, 5 L-118mm, M10x1 L-113mm, M10x1 L-102mm, M10x1 L-83mm, M10x1, 25 L-64mm, M12x1, 25 L-47mm. Injector: M24x1, 5 L-88mm, M22x1, 5 L-73mm, M24x2 L-63mm, M20x1, 5 L-75mm, universalny L-160mm.



GTY-AN7030

Full Coverage Disconnect Coupling Set

All the tools required for disconnecting heater hoses, transmission oil cooler pipes, air conditioning pipes and fuel lines used on today's later model vehicles.



GTY-AN7061

4PCS A/C Disconnect Tool Set

Spring type coupling connectors for air conditioning lines. Locking action prevents spray when disconnecting lines. Suitable for most Ford, GM (Vauxhall/Opel) and Chrysler vehicles. Set includes: 3/8", 1/2" 5/8" & 3/4", couplings.



GTY-AN7064

9PCS Fuel & Transmission Line Disconnect Tool Set

For use on A/C line, fuel line, and transmission cooler lines.
 • Contents:
 - 3/8", 1/2", 5/8", and 3/4" spring lock disconnect tools for A/C line on 1981 thru 2006 Ford cars and trucks, 1994 thru 2006 Chrysler and Jeep vehicles.
 - 3/8" and 1/2" fuel line disconnect tools for Ford vehicles.
 - 5/16" and 3/8" fuel line disconnect tools for GM and Chrysler vehicles.
 - Transmission oil cooler line disconnect tool used on many GM and Ford vehicles.



GTY-NA1023

Fan Service Wrench Kit

For holding the Visco-clutch drive shaft in BMW and Ford.
 Allows the technician to hold the water pump pulley in place while loosening the radiator fan.
 Allows removal of the visco-coupling on the cooling fan.



GTY-NA1090

10Pcs Fan Clutch Wrench Set

Allows you to hold the fan clutch with the clutch holdertool, while using the special wrench to turn the fan clutch nut. Square drive allows attachment of a breaker bar for extra torque.
 A must for any front engine service. Works worldwide range of Ford, General Motors and Chrysler vehicles.



GTY-NA1093

Drywall Tools Carrier

ABS engineering plastic, anti-decoupling design to prevent goods falling down, ensure safe operation, TRA non-sliding material handle.
 Excellent way to carry drywall, plywood, or solar panels. Reduces back strain, improves safety, and speeds up walking with a panel.
 Max Load Bearing: 80kg/176lbs



GTY-A1039

Automotive Stethoscope

Quickly and accurately locates noise and trouble in engine and moving parts.
 Super sensitive ear pieces & probe.
 2pcs metal probes extends to 11-3/4" for hard to reach spots.
 Heavy duty flexible vinyl tubing. Shockproof abs handle.
 Effectively locates trouble spots within engine block.
 The rubber tube is soft even in cold weather.



GTY-NA1068

5Pcs Fan Clutch Wrench Set-Ford

Used to service water pumps and fan clutches, and other components on the front of Ford engines.
 1/2" Square drive, used with a 1/2" breaker bar or ratchet.
 Heat tempered steel for toughness.
 Painted for rust resistance.
 Set Includes:
 2 pieces wrench:
 48 mm (1-7/8")
 40 mm (1-9/16")
 3 pieces holding tool
 54mm (2-1/8") x 72mm (2-13/16")
 68mm (2-11/16") x 76mm (3")
 82mm (3-1/4")



GTY-NA1092

Air Conditioning Flushing Adapters Kit

2x Clamp Assembly
 2x Support Plate (1/2" OD tube)
 2x Support Plate (5/8" OD tube)
 2x Support Plate (3/4" OD tube)
 2x Support Plate (7/8" OD tube)
 2x Support Plate (No slot)
 Laser SATRA logo + S-14FAS on main pieces.
 Laser SATRA logo on the rest parts.
 Blue 300C BMC + SATRA Molded in + SATRA Ean code + warning sticker + SATRA Ean code sticker



GTY-NA1094

Digital Infrared Thermometer

Temperature measurement in the range from -50 °C to 550 °C;
 Optical resolution (D: S) 12: 1
 2 Fahrenheit and Celsius modes
 Emissivity 0.1-1.0 adjustable
 Accuracy: 0.1 °C / F
 Automatic shutdown after 6 seconds
 A laser pointer facilitates precise work with the device



GTY-NA1095

EVA FOAM

Measuring 455x210x30mm, this mat provides excellent support and comfort, whether you're kneeling during repairs, sitting, or protecting surfaces from scratches and impacts. Made from high-quality EVA foam, it is lightweight, water-resistant, and easy to clean, ensuring durability and long-lasting performance.



GTY-NA1097

Air Regulator

Medium: Air
 Environmental Temperature: 5-60°C
 Adjustable Pressure Range: 0.05-0.85Mpa
 Max. Flow: 650L/min
 Pressure Resistance: 1.5Mpa (213psi)
 Filter Cartridge Accuracy: 40µm
 Filter Bottle Capacity: 15cc
 Oil Capacity: 15cc



GTY-NA1096

Soft Duster Microfiber Car Brush

Material: Microfiber+Steel
 Size: 16.7"(L)x4.7"(W)
 Weight: 0.6lb
 Color: Blue



GTY-NA1098

Air Regulator

Port size: G1 / 4
 Filtration precision: 5m
 Operating pressure range: 0 ~ 1.0MPa
 (manual drain: 0-9.5kgf / cm2, differential pressure discharge: 1.5-9.5kgf / cm2)
 Temperature: 5 ~ 60°C
 Gauge caliber: G1 / 8
 Treatment cup capacity: 15CM3
 Length: approx 15cm



GTY-HN1112

16" Circlip Pliers Set(New)

Offset tips make it easier to install and remove circlips. Removable and replaceable tips have a spring ratchet locking mechanism to hold circlips securely against tension.
4 each of 0.12"(0°, 15°, 45°, 90°)



GTY-A1020

Piston Ring Pliers

Special steel.
Nickel-plated.
For removing and mounting rings.
Size: 40-100mm, 80-120mm, 110-160mm



GTY-AN7065

3PCS Flexible Hose Clamp Set

Auto repair tools.
Car tools.
Car accessories.
For clamping flexible hoses.
Signaling color yellow.
Made of plastic.
1. Heating and fuel injection hoses up to 15mmφ: L150.
2. For hoses up to 30mmφ: L180.
3. Radiator hoses up to 60mmφ: L253.



GTY-HN1113

Extended Reach Hose Clamp Pliers

For easy removal and installation of ring type hose clamps.
Swivel type jaws grip at angle to allow access in confined areas.
Fingertip position lock makes it easy to lower radiator hoses.



GTY-A1019

Valve Stem Seal Pliers

Gripping serration allows them to grasp both original equipment & after market seals regardless of the configuration.



GTY-A8001

Fuel Line Pliers

1. For undoing plug connections with snap-in pin, e.g. when changing the fuel filter.
2. 90° angled for hard-to-reach areas
3. Suitable for Alfa, Audi, Fiat, Lancia, Volvo, VW etc.



GTY-AN7506

3PCS Hose Pinch Off Pliers Set

The pinch-off pliers act as a third hand to help you keep hose changed tightly when you are servicing various engine components.
No need to drain system when changing thermostats.
Save coolant-save time.
Jaws swivel for parallel clamping.
Locking ratchet provides tight grip in just about any position.
Can also be used to pinch-off many other hoses.
Do not use on wire reinforced radiator hose.
Size: 8", 10" & 12"



GTY-HN1114

CV Boot Clamp Pliers

Mini CV Boot Clamp Plier. Circlip, Multi Functional.



GTY-HN1115

11" Curved Hose Clamp Pliers

11 Inch Curved Hose Clamp Pliers



GTY-HN1117

Multi-Purpose Hose & Wire Pliers

Capacity: 1/4" TO 3/4" OD
Length: 8.5" & 10"
Remove engine 1/4" air pipe
Remove engine intake air pipe
Remove spark plug lead
Remove cooling water pipe
Size: 8.5" & 10"



GTY-HN1120

Vag Long Reach Hose Clamp Pliers

For replacement of fuel, oil and water hose.
Hose clamp with flexible 630mm wire
Convenient for working hidden areas and long distance.



GTY-HN1122

Angle Tip Lock Ring Pliers

Spread snap lock rings in brakes, transmissions, pedal shafts, clutch shafts & machine tools, jaws have deep serrations on the outside of tips to help lock rings securely.



GTY-HN1116

Trim Clip Pliers

Removes and saves all types of clips
The front of the tool is tapered will fit easily under a clip, spread the jaws lightly so they will go under and around the clip, then close the jaws and the clip saver removes the clip without damage to the clip.
Gear for removing door panels.



GTY-HN1119

BMW Oil Cooler Line Pliers

Release the hydraulic cooling lines that connect to the transmission.
Front clips fixed by screw could adjust the angle for use.
Applicable: BMW E46, E53, E60, E61, E63, E64, E65, E66, E70, E81, E83, E85, E86, E87, E90, E91, E92, E93, R50, R52, R53, Rrt



GTY-HN1121

Exhaust Pipe Clamp Pliers

Opens exhaust hose clamps quickly and easily.
Ideal for Citroen, Peugeot and Renault exhaust clamps. Also suitable for prising open any comfort types of clamp or clip secured with nut and bolt.
Comfort grip handles with self locking mechanism aid working on spring clamps



GTY-HN1123

Internal/External Snap Ring Pliers

1-plier handle. 4-interchangeable tips sets (45°, 90°, Straight 2), the pliers easily convert between internal and external applications by squeezing handle and switching the tab.



GTY-HN2501

**Pliers For Self-clamping
Hose Clamps Locking
And Rotating Jaws**

Pinchers For Self Clamping Hose Clips
Lock & Rotating Jaws
Short edition
Handle color: blue



GTY-HN2503

1/2 Adapter

1/2"Breaker Bar Rolling Head Adapter
CR-MO
1/2"
can be used with 24mm spanners



GTY-HN1124

Heavy-Duty Hose clip Pliers

Heavy-duty spring loaded pliers for fitting
and removing clic and Clic-R hose clips.
Special jaws allow the change from fit to
remove(and back again) simply by turning
the pliers over in your hand.PVC Dipped
handles for improved grip and comfort.



GTY-HN1126

16" Internal Snap Ring Pliers

16"internal snap ring plier,includes 1 extra
sets of replaceable 2.75mm
diameter 0°/45°/90°tips



GTY-HN2502

**Internal Drive Shaft
Extractor Lever
Fork Tool**

Total length: 400mm;
Mouth width: 82 mm.



GTY-HN2504

Timing Tool

Material: CRMO
Finish: phosphating



GTY-HN1125

20" Internal Snap Ring Pliers

20"internal snap ring plier,includes 1 extra
sets of replaceable 3.5mm diameter 90°tips.



GTY-HN1127

Wood Working Drill Gun

Chisel Shank:2.5"
Blow Per Min:4500BPM
Air Inlet (Npt):1/4"
Air Hose(I.d):3/8"
Sug.Air Conmp:2Hp
Net Weight:0.98kg
Overall Length:140mm



GTY-HN7010

Hose Clamp Pliers

Material:Heat-treated steel
Comfortable vinyl handles
Package:Sliding card



GTY-HN7012

Large Hose Clamp Pliers

Material:Heat-treated steel
Comfortable vinyl handles
Package:Sliding card



GTY-HN7014

45° Hose Clamp Pliers

Material:Heat-treated steel
Comfortable vinyl handles
Package:Sliding card



GTY-HN7015B

Flexible Hose Clamps Pliers



GTY-HN7011

Flat Band Hose Clamp Pliers

Material:Heat-treated steel
Comfortable vinyl handles
Package:Sliding card



GTY-HN7013

Hose Remover Pliers

Material:Heat-treated steel
Comfortable vinyl handles
Package:Sliding card



GTY-HN7015

Flexible Hose Clamps Pliers

Material: CRMO 4140
Length of pliers: 210MM
5 teeth with lock
Flexible hose length: 690MM
Max opening: 42MM
Width of top Jaw:13MM,bottom Jaw: 34MM



GTY-HN7016A

5PCS Hose Clamp Pliers Set

With four jaw patterns and a ratchet clamp system
Ratchet mechanism fitted to most of the pliers
PVC dipped handles for operator comfort
Contents :
280 mm Flexible ratchet hose clamp with 700 mm
twin cables
200 mm ratchet hose clamp plier with rotating V
groove patten jaw blocks
200 mm ratchet hose clamp plier with rotating cross
groove patten jaw blocks
200 mm ratchet hose clamp plier with rotating cup
and slot groove patten jaw blocks
250 mm spring loaded multi-purpose hose and wire
clamp pliers with rotating curved interlocking jaws



GTY-HN7017

9PCS Hose clamp pliers Set

Detailed Specification:
 1pc Hose Clamp Pliers
 1pc Swivel Jaw Spring Wire Clip Pliers
 1pc Swivel Jaw Band Clip Pliers
 1pc Angled Flat Band Hose Clamp Pliers
 1pc Hose Remover Pliers
 1pc Clic-R Collar Pliers
 1pc Flat Band Hose Clamp Pliers
 1pc Screwdriver
 1pc Hose Remover



GTY-HN7020

2PCS 20" Circlip Pliers Set

One internal snap ring pliers and one external snap ring pliers.
 Includes 2 extra sets of replacement 3.5mm diameter 90°tips.
 Spring ratchet locking mechanism holds against snap ring tension for easy handling of large snap rings.
 Capacity :6-1/2"-11-3/4"
 Makes working with large snap rings much easier
 Heat-treated tips



GTY-HN7022

2PCS 16" Circlip Pliers Set

Detailed Specification:
 Tip diameter: 0.12"(3mm)
 Internal: 3-1/16"- 6-1/4" (78mm-159mm)
 External: 3-1/2" - 6-1/2" (89mm-159mm)
 Spread: 3-1/4" (85mm)
 Length: 16"
 Tip size: 0.12" (3.0mm) -0°, 45°, 90°set



GTY-HN7024

4 IN 1 Snap Ring Plier Set

4 jaw configurations-0°,45°, 90°&180°
 Application: Use with internal and external snap rings
 Effective range: 10-50mm(3/8"-2")



GTY-HN7018

Ratchet Hose Clamp Pliers



GTY-HN7021

10" Snap Ring Pliers Set

Removable and replaceable tips have a spring ratchet locking mechanism to hold circlips securely against tension
 Contents:
 2pcs 10" circlip pliers
 16pcs replacement tips 2 each of 0.108" and 0.120" (0°,15°,45°,90°)



GTY-HN7023

Snap Ring Pliers Set

Heat-treated steel
 Comfortable vinyl handles
 Contain include:
 1PC 5-1/2" bend pliers. (Tip size: .038")
 1PC 6" straight plier. (Tip size: .038")
 1PC 5-1/2" bend pliers. (Tip size: .047")
 1PC 6" straight plier. (Tip size: .047")
 1PC 7-1/2" bend pliers. (Tip size: .070")
 1PC 8" straight pliers. (Tip size: .070")
 1PC 8-1/2" bend pliers. (Tip size: .090")
 1PC 9" straight pliers. (Tip size: .090")
 1PC 5" hook tool
 1PC 5" pick tool
 1PC blow case



GTY-HN7025

Snap Ring Pliers

Material: Heat-treated steel
 Package: Sliding card



GTY-HN7026

CV Boot Clamp Pliers

Crimps And Flattens Ear-Type Clamps Found On Cv Joint Boots Stalls Quick Clamps On Fuel Filter And Cooling System Hoses.



GTY-HN7033

5pcs Snap Ring Plier Set

Included:
 2pcs 6" straight tip
 1pcs 6" 90° bent tip
 1pcs 8" straight tip
 1pcs 8" bent tip



GTY-HN7053

Spark Plug Wire Pliers

Insulated plier jaws and handles safely remove spark plug wire boots.
 Offset serrated jaws perfect for accessing hard-to-reach boots.
 For safe removing of spark plug wire boots without damage with nylon-tipped jaws grasp boots firmly.



GTY-HN7055

Electrical Disconnect Pliers

This Tool Easily Removes Locking Push Tab Style Electrical Connectors Found on Mass Air Flow Sensors, Fuel Injectors, Ignition Coils and Other Applications.



GTY-HN7027

Clip Remover Pliers

For removing fixing bolts on door panels, mouldings and bumper rubber strips.



GTY-HN7050

CV Boot Clamp Pliers

Use to tighten ear-type cv boot camps
 Place clamp around boot in correct position
 Place pliers jaws on ends of clamp and compress until boot secure



GTY-HN7054

Snap Ring Pliers

This Quinn snap ring pliers set has reversible action to simplify the removal and installation of both external and internal snap rings. Interchangeable tips handle the most popular sizes of snap rings or circlips. Durable drop forged steel construction with comfort grips.



GTY-AN2501

5PCS Shock Absorber Seat Socket Set

Size: 10.5mm-VW Golf ,
12.5mm-VW Polo,
14.5mm-Polo, Golf,
Passat, Audi 80
14.0mm-Mercedes Benz-W209C, W209



GTY-AN2504

3/4", 158mm, With Axle Nut Sleeve A-1329

MAN TGA Drive: 3/4", 158mm,
drive shaft nut sleeve
Inner diameter :133mm,
outer diameter :145mm,
height :160mm



GTY-AN2506

Y- Socket Wrench

hexagon 8/9/10mm



GTY-AN2508

"Y"Ring Wrench

"Y"ring wrench



GTY-AN2503

SCANIA Toothed Sleeve, 72mm GTY-A-1090B

Suitable for SCANIA Transmissions.
For loosening and tightening of the retaining nut on the transmission main shaft.
SCANIA transmission clutch front main shaft socket



GTY-AN2505

Pedal Wrench

Rubber non-slip handle
Suitable for 15mm and 24mm



GTY-AN2507

"Y"Hex Wrench

Size: 4/5/6mm



GTY-AN2509

Hub Cone Spanner

Size: 13/14/15/16mm



GTY-AN2510

Bicycle Headset Wrench

Size: 30/32 and 36/40mm



GTY-AN2512

Spanner Wrench

1x bearing spanner,
e.g. for Hollowtech II,
compatible bearing shells



GTY-AN2514

Spoke Wrench

Forged "O" spoke adjuster
10/11/12/13/14/15G



GTY-AN2516

Spoke Wrench

3.2/3.3/3.5



GTY-AN2511

Pedal Wrench

Size: 15/16 and 15/17mm



GTY-AN2513

Pedal Wrench

1x pedal wrench (15mm)



GTY-AN2515

Spoke Wrench

Forged "O" spoke adjuster
9/10/11/12/13/14/2x 15



GTY-A2063
7PCS Sensor Socket Set

For removal or replacement of heated and nonheated oxygen sensors. Cut-away sections allow sockets to fit over wiring harnesses. Cut-away sockets 22mm (7/8") 27mm and 29mm. Wrenches (cut-away) 22mm deep and shallow. Standard deep 27mm.



GTY-NA1044
7 Piece Special Injector Socket Set

Suitable for most injectors. Size 25.27.28.29.30 mm. Siemens and Bosch nozzles. Also suitable for Peugeot and Citroen 2.0 HDI L engines (110/135 hp)



GTY-NA1100
2Pcs Lambda Thread Repair Cutter Set

Suitable for cleaning and repairing damaged threads on the exhaust oxygen sensor ports. Size: M 18 x 1.5 & M 12 x 1.25 mm



GTY-NA1127
18pcs 3/8" Drive Oil Drain Socket Set

1pc Flexible handle (200mm)
6pcs H8,9,10,12,14,17mm
1pc triangle 10mm
1pc square socket 10mm
9pcs square 5/16", 3/8", 7,8,10,11,12,13,14



GTY-NA1013
4PCS EURO-TYPE SENSOR SOCKET SET

To remove the screw with sensor line. Contents: 1/2" Dr. x 28mm (12PTX78L) 1/2" Dr. x 27mm (12PTX78L) 1/2" Dr. x 22mm (12PX78L) 1/2" Dr. x 22mm (6PTX110L)



GTY-NA1072
5Pcs Oil Filter Cap Wrench Set

3/8" Square drive
Manufactured from chrome vanadium steel
Size: 24MM CADILLAC 36
27MM MERCEDES: ACLASS
32MM VAUXHALL/OPEL: ASTRA, CORSA, ZATIRA
36MM VAUXHALL/OPEL: OMEGA DL 16V
VECTRA, ZAFIRA > 98, BMW: 16V
FORD: MONDEO 2.0D 16V DURA TORQ
ENGINE, TRANSIT 2.5 & 2.0 DURA TORQ DIESEL
ENGINE
MERCEDES: 116MB ENGINE VITO CDI
38MM VAUXHALL/VECTRA 2 LITER DIESEL
ENGINE



GTY-NA1102
4pcs Stripped Screw Extractor Set

Designed to remove rounded or stripped fasteners with internal drive heads. Internal hex sizes 1/4" to 1/2" and 6mm to 13mm. Hand sockets and wrenches can be used with tool. Made of heat-treated alloy steel for durability.



GTY-NA1128
18Pcs 3/8" Dr Oil Drain Plug Set

Contents: 10Pcs Square socket: 7,8,9,10,11,12,13,14mm, 5/16", 3/8"
6pcs Hex socket: 8,9,10,12,14,17mm
1pc Triangle socket: 10mm
1pc Sliding bar: 160mm



GTY-NA1128B
18-piece Oil Drain Plug Socket

Square: 7 - 8 - 10 - 11 - 12 - 13 - 14 mm 5/16" - 3/8"
Hexagon: 8 - 9 - 10 - 12 - 14 - 17 mm
Triangle: 10 mm
Wheel: XZN 16 mm VAG
Double square: 10 mm
3/8" Square = 9.52 mm
Chrome-Vanadium Steel



GTY-NA1130
3pcs 1/2" Drive Socket & Bit Socket Brake Servicing Set

14mm pentagon socket
Opel/vauxhall (Astra G, Zafira), Smart
Special socket for Girling brakes 19mm pentagon socket fits Peugeot.
Renault 10mm pentagon bits.



GTY-NA1132
12 Pcs Air Conditioning Tool Kit

2pcs sockets SW12 AND SW15 (1/4" DR TOTAL Length 40mm).
2pcs specialist sockets 2.2mm and 3.2mm (1/4" DR total Length 50mm).
1" 1/4" bit holder.
7*5 point tamperproof bits-TS10/TS15/TS20/TS25/TS27/TS30/TS40.
Handy set for removing the plastic valve caps and valve cores when carrying out servicing or repairs on automotive air conditioning systems.



GTY-NA1138
6 Pcs Glow Plug Socket Set

Universal joint for easy replacement of glow plugs in most engines.
3/8" Square Drive.
Sizes: 8mm, 9mm, 10mm, 12mm, 14mm, 16mm (6-point).
Manufactured from chrome vanadium steel.



GTY-NA1129
Oil Series Socket Kit

1pc T-bar with 3/8" Drive
1pc Drain plug Socket-Hex 3/8"
1pc Drain plug Socket-Hex 8mm
1pc Drain plug Socket-Hex 9mm
1pc Drain plug Socket-Hex 10mm
1pc Drain plug Socket-Hex 12mm
1pc Drain plug Socket-Hex 14mm
1pc Drain plug Socket-Hex 17mm
1pc Drain plug Socket 8mm
1pc Drain plug Socket 3/8"
1pc Drain plug Socket 11mm
1pc Drain plug Socket 13mm



GTY-NA1131
5pcs Internal Hexagon Bit Set

Use for motorcycle axles and forks.
1/2" Drive socket adaptor, bit size 17/19/22/24mm
1pc 1/2" bits holder 10mm
use for motorcycle axles and forks
Made of chrome Vanadium steel



GTY-NA1137
Glow Plug Socket Set

3/8" drive: 8mm, 9mm, 10mm, 12mm, 14mm, 16mm



GTY-NA1139
6 Pcs Diesel Injector Line Socket Wrench Set

For loosening and tightening nuts and bolts in confined space such as fuel injector connections.
L-type, open ended.
1/2" Drive 12pt. Size: 12, 14, 16, 17, 18, 19mm



GTY-H2501
Automatic Tire Changer

1. Operating on control panel which is low-pressure and mobile, the control panel is designed light and handy.
2. voltage 220v, 380v all available
3. The assembly arm is equipped with pendular assembly round plate and assembly hook.
4. The tool bracket, lifting arm and gripper are controlled by hydraulic system.



GTY-H2503
BMW Polishing Cleaning Set

Free speed: 3500 RPM ±5%
Required air pressure: 6.2bar(90psi)
Average air consumption: 17.5CFM(0.5 m³ / min)±10%
Required internal gas pipe size: 3/8 inch (9.5 mm)
Weight: 1.2 kg



GTY-H2505
7 Piece Car Exhaust Pipe Expander

Feature:
Exhaust Pipe Stretcher Expander Kit 1-5/8" to 4-1/4" Pipe
Impact Driven Heavy-Duty Expander allows for fitting smaller exhaust piping and making exhaust seals.
Use with an impact wrench to quickly stretch pipes. Collet sets expand pipes from 1-5/8" to 4-1/4".
The tool can be used on the vehicle. The pipe stretcher kit is a convenient, inexpensive alternative to hydraulic pipe expanders.
Portable exhaust pipe expander tool, easy to use, suitable for most cars.
Comes in a molded storage case.
Specifications:
Drive tool: 28mm
Material: Steel
Collet group: Extends the pipe from 1-5/8 to 4-1/4
Package Includes:
Steel Expander 1 5/8" - 2" Collet Steel Expander 2" - 2 1/2" Collet
2 3/8" - 2 3/4" Collet 2 3/4" - 3 1/8" Collet
3 1/8" - 3 1/2" Collet 3 1/2" - 7/8" Collet
3 7/8" - 4 1/4" Collet 1x Storage Case



GTY-H2507
Volkswagen, Audi 7-speed, DSG Mechatronic Unit Remover

Total length :270mm
Material: 45#+ plastic
Surface treatment: chrome plating
Metal laser cutting



GTY-H2502
Porsche Shock Nut Removal Set

Porsche/Volkswagen front shock absorber upper seat disassembly sleeve
17/19/21/22/24MM 1/2 interface, shock absorber mounting tool



GTY-H2504
DSG Clutch Installation/Removal Automatic Tool Set

Rubber non-slip handle
Suitable for 15mm and 24mm



GTY-H2506
Pulley Removal Tool

Versatile Compatibility: This damper pulley puller Set compatible with GM, Mitsubishi, Cadillac and Oldsmobile Cars, SUVs, vans, and pickup trucks.
Quality and Longevity: Crafted from high-quality carbon steel, our pulley puller tool kit ensures durability and reliability.
Package Include: a 3-jaw puller, a forcing screw with a 3/8-inch square drive (for use with a ratchet and a 3/4-inch hex for wrench or socket use), 4 lengths of forcing rods (103 mm, 136 mm, 158 mm, 190 mm)



GTY-H2512
15pc Pneumatic Special Sleeve

Specification: 7-8-9-10-11-12-13-14-15-16-17-18-19-20-21
Material :CRMO
Surface: black phosphating



GTY-H2513
127pcs Drill Bit Set

toolant 127pcs SAE/Metric Tap and Die Set, Ratcheting SAE Metric TAP and Die Set Standard with Drill Bit Combo for Threading



GTY-H1013
Automotive Circuit Tester

Red lead to power source, black lead to ground source.
Proper connection made, the power LED is green when two leads reserved.
Heavy duty insulated probe.
Test range: 6V & 12V.



GTY-H1017
Automotive Circuit Tester

DC6-12V, 2in1
2000V (IGNITION)
Packing: blister packing
CTN Size: 52*31.5*42cm
QTY/CTN: 100pcs
G.N. weight: 11/10kgs



GTY-H1031
Tester

TEST RANGE: AC100-250V.
Packing: color box
CTN Size: 54*35.5*23cm
QTY/CTN: 400pcs
G.N. weight: 16/15kgs



GTY-H2516
Jeep Chrysler 3.0/3.2/3.6 Engine Timing Tool

Special designed wrench allows the assembly / disassembly of the camshafts, timing belt replacement, check and adjust the camshaft timing, lock the crankshaft and many more. Can be used on diesel and gasoline engines from Audi, Seat, Skoda, VW
ENGINE TYPES: Audi A1 2011 >, Caddy 2016 > 3-cyl. direct injection (1.0 L, 4V, EA211, turbocharger), 4-cyl. direct injection (1.2 L, 4V, EA 211, turbocharger), 4-cyl. direct injection (1.4 L engine, turbocharger)



GTY-H1015
Automotive Circuit Tester

DC6-12V
Packing: blister packing
CTN Size: 52x31.5x42cm
QTY/CTN: 100pcs
G.N. weight: 11/10kgs



GTY-H1029
Tester

TEST RANGE: AC100-250V
Packing: display box
CTN Size: 67*35.5*23cm
QTY/CTN: 500pcs
G.N. weight: 10/9kgs



GTY-BG1203
7PCS Body Hammer Set

Drop Forged
1. roof wedge-shaped: length: 120mm, width: 50mm
2. bagueta coelomate: length: 73mm, width: 37mm
3. janvil type-cule: length: 62mm, width: 51mm
4. janvil type-megaly: length: 72mm, width: 54mm
5. stretching and planishing hammer: length: 96mm, round face and finely chequered
6. planishing and picking hammer: length: 120mm, round face and pointed head
7. hammer with shock absorber for flattening: length: 295mm, width: 114mm.



GTY-A7021

Radiator Hose Pick

To remove hoses fast and easily.
Package: Sliding card



GTY-H1073

2PCS Mini Pick And Hook Set

Two-piece set includes aluminum handle knurled for a sure grip
It also includes the following heat-treated, high carbon steel picks:
O-ring, 90°, straight, hook
Use pick to pull O-rings, seals, cotter pins and brushes quickly and easily



GTY-H1075

Pry Bar

Features
Remove fasteners that secure door panels and trim pieces without damage to panel or trim
Soft grip handles with contour thumb stop
Distinct pivot point is designed for appropriate leverage and to discourage twisting that may damage panel or trim piece



GTY-NA1073

19-Piece Terminal Tool Set, Multi-brand

Removes wires from terminal blocks without any damage.
For round and flat terminal blocks.
Fits various brands, for example W, Opel, Ford, Mercedes BMW and many more.
Protective caps prevent damage of the blades.
Each one tool for:
Round contacts 23mm - Round contacts 035mm
Flat contact standard 1,48mm - Flat contact micro timer 1
Flat contact micro timer 2+3, Flat contact maxi-power-timer
Flat contact PIT/POD, flat contact JPT/SPT, 3 replacement bushes



GTY-AN1070

20PCS Radio Removal Tool Set

2pcs Radio Removal U-Hook (New Blaupunkt)
1pc Special Pentagon Wrench (BMW)
1pc Special Pentagon Wrench (BMW)
2pcs Radio Removal Keys (Mercedes-Benz/Porsche/Becker)
2pcs Radio Removal Keys (VW)
2pcs Radio Removal Keys (New Skoda)
2pcs Radio Removal Keys (New Becker)
2pcs Radio Removal Keys (Ford/VW/Audi/Grundig/Blaupunkt)
1pc Allen Hex Wrench (BMW/Opel)
2pcs Radio Removal Keys (Panasonic 2006)



GTY-H1074

7PCS Mini Pick And Hook Set

Installing and removing "o" rings, seals and washers
Pulling small fuses
Retrieving small parts
Aligning
Scribing
Piercing



GTY-HN7074

2PCS Pry Bar Set

Easily remove plastic door upholstery clips.
Heavy-duty steel shaft with large comfortable handle.
Bright polished good quality steel claw blade with curved leverage end and plastic handle.



GTY-NA1075

23-Piece Terminal Tool Set

Universal range for virtually all vehicles
Ford damage-free unlocking of terminals and connectors, e.g. for ABS, climate sensors, radios, PDC, trailer coupling modules, and much more.
Faults due to corrosion or connection defects can be repaired quickly.
Suitable for round and flat contacts.
Indispensable for technicians and vehicle electricians.



GTY-NA1079

15PCS Universal Terminal Release Tool Set

Reduce time spent on and damage to vehicle electrical systems with these connector tools, set consists of cable extraction tools, contact injection and contact dismantling tools covers a wide range of connectors including cablelex
Vehicle coverage: BMW Daimler/Chrysler Fiat Ford Man Mazda Porsche PSA Renault Saab Seat Skoda Vag Vauxhall/Opel



GTY-BG0004-3L

Long Nose Clamp

Capacity: 2ton
Single-way pull operation.
The flat design is suitable for using in a confined space.



GTY-BG0004-5FT

Frame Rack Clamp (Two-way)

Capacity:
5ton (Straight way)
2ton (Cross way)
The special puller design used with plate, makes it hard to be broken.
There is a channel in the middle, add use range.



GTY-BG0004-5T

Small Mouth Pull Clamp

Capacity: 5ton
Use a wide range, the main function is the gripper and tensile to the body of car.



GTY-H2501

25Pcs Terminal Removal Tool

Essential for cleaning or replacing terminals and removing them from electrical connectors without damage to the connector wire.
Suitable for a comprehensive range of automotive applications



GTY-BG0004-3T

Big Mouth Clamp

Capacity: 3ton
Used for edge raised, single-way pull operation.



GTY-BG0004-5HT

Heavy Duty Clamp

Capacity:
5ton (Straight way)
1ton (Cross way)
Use for edge raised, using thickened clamp need big power.



GTY-BG0004M

Multi-way Clamp

Capacity:
2ton (Straight way)
1ton (Cross way)
The clamp is multi-angle design, can use many methods pull such as hang-pull, pull-down, side pull.



GTY-H1040
Magnetic Pick Up Tool

Flexibleshaftholdsinallpositions. Long&slender shaft for easy access to confined areas comfort-griphandle26"(650mm)OAL. Magnetic capacity:1kgs.



GTY-H1041
Flexible Magnet Pick Up Tools

Flexibleshaftholdsinallpositions. Long&slender shaft for easy access to confined areas comfort-griphandle20"(500mm)OAL. Magnetic capacity:2kgs



GTY-H1066
Flexible Magnetic Pick Up Tool

Flexibleshaftholdsinallpositions. Long&slender shaft for easy access to confined areas comfort-griphandle26"(650mm)OAL. Magnetic capacity:1kgs.



GTY-H1067
2PCS Telescopic Magnetic Pick Up Tool And Inspection Mirror Set

2-1/4"telescoping inspection mirror to find small parts dropped in hard to reach places. Special design joint allows mirror to move at any angle. The comfortable vinyl grip keepshandle secure even in wet or oily hands.



GTY-H1068
Flexible Magnetic Pick Up Tool

Shaft can be bent at any angle to retrieve dropped metal objects in hard to reach areas. Flexible spring shaft with styled composite handle.



GTY-H1071
2 In 1 Telescopic Magnetic And Mirror Set

Special design joint allows mirror and magnetic pick up tool to move at any angle. Telescoping inspection mirror to find small parts dropped in hard to reach places. Convenient type pocket clip.



GTY-H1077
Telescopic Mirror With Magnetic Tip

Set features include:
2"X3" Inspection Mirror Extends Out to 25-1/2"
5LB Fixed Magnet Extends to 25-1/2"
Extra 1.5LB Compact Magnet
Extra 5LB Swivel Magnet



GTY-H1078
5 Pcs Magnetic Pick-Up Tool Adjustable

Package Included:
1x 10 LBMagnetic Pick Up Tool
1x 8 LBMagnetic Pick Up Tool
1x 1.5 LBMagnetic Pick Up Tool
1x Round Shape Inspection Mirror
1x Square Shape Inspection Mirror



GTY-H1169
Pick Up Tools With LED/MAGNET

Heavy duty magnet holds tools for convenient purposes. Size: 600mm, 400mm.



GTY-H1170
Pick Up Tools With Magnetic

The magnetic capacity: 15LBS. Telescope from: 7-3/8" to 30".



GTY-H2028
Magnetic Pick Up Tool

Hold up to 50 Lbs. Size: total length: 39"



GTY-HN7066
Flex Inspection Mirror

Special design joint allows mirror to move at any angle. Flexible shaft holds shapes and retrieves in hard to reach spaces and around obstructions. The handles fit perfectly in the hand providing comfort and control.



GTY-HN7067
1.5LB Magnetic Pick Up Tool With Scraper

Can lift up to 1 pound. The pointed head can be used as a scribe. You can use the pointed head to clean the water-spraying hole of the windshield washer if the hole is stopped up.



GTY-H8119
270PCS O Ring Assortment

Quantity: 270 pcs
Size: 20x 5.29x1.78mm; 20x 6.07x1.78mm; 20x 6.8x1.9mm; 20x 7.65x1.78mm; 20x 7.8x1.9mm; 20x 8x2mm; 20x 8.8x1.9mm; 15x 10.82x1.78mm; 15x 10.77x2.62mm; 15x 11x2mm; 15x 12x2mm; 10x 13.9x1.8mm; 10x 13.95x2.62mm; 10x 10x2mm; 10x 15x2mm; 10x 17x2mm; 10x 17.17x1.78mm; 10x 17.04x3.53mm
Weight: 140 kg



GTY-H8120
120PCS Car Fuse Assortment

Contains 6 popular sizes:
5AMP Orange 20pcs
10AMP Red 20pcs
15AMP Blue 20pcs
20AMP Yellow 20pcs
25AMP Clear 20pcs
30AMP Green 20pcs



GTY-H8125
125PCS Grommet Assortment

Contains 18 popular sizes:
3.18x6.35mm 15pcs
5.57x7.94mm 10pcs
7.14x12.7mm 7pcs
12.7x15.08mm 3pcs
9.53x11.91mm 6pcs
9.53x12.7mm 5pcs
7.94x14.29mm 3pcs
9.53x20.64mm 3pcs
11.11x19.05mm 4pcs
15.88x24.61mm 3pcs
19.05x23.81mm 2pcs
7.14mm 20pcs
9.53mm 20pcs
12.07mm 10pcs
15.88mm 5pcs
19.05mm 4pcs
22.23mm 3pcs
25.4mm 2pcs



GTY-H8200

200PCS Spring Assortment

Contains 200 popular sizes:
 Extended springs:
 5x20.5mm 10pcs 8.5x36.5mm 10pcs
 5.5x25.5mm 10pcs 8x28.5mm 8pcs
 6.5x22mm 10pcs 8x31.5mm 10pcs
 8.5x47mm 12pcs 8x44.5mm 12pcs
 7x51mm 12pcs 4x79.5mm 12pcs
 7x38mm 10pcs 4.5x44.5mm 8pcs
 Compressed springs:
 7x12.5mm 10pcs 9.5x16mm 6pcs
 6.5x10mm 10pcs 9.5x19mm 12pcs
 7x19mm 10pcs 9x35mm 8pcs
 5.5x38mm 10pcs 5.5x17mm 10pcs



GTY-H8300

300PCS Snap Ring Assortment

Contains 18 popular sizes:
 32mm 5pcs 28mm 10pcs 26mm 15pcs
 25mm 15pcs 22mm 20pcs 20mm 15pcs
 11mm 15pcs 12mm 15pcs 13mm 25pcs
 14mm 15pcs 16mm 20pcs 19mm 25pcs
 3mm 20pcs 4mm 10pcs 5mm 15pcs
 6mm 25pcs 8mm 15pcs 9mm 20pcs



GTY-H8420

420PCS Metric Nut & Bolt Assortment

Contains 18 popular sizes:
 Machinescrews Washer Hex Nut
 3x16 20pcs M3 25pcs M3 25pcs
 4x16 20pcs M4 25pcs M4 25pcs
 4x25 20pcs M4 25pcs M4 25pcs
 5x20 20pcs M5 25pcs M5 25pcs
 5x25 20pcs M5 25pcs M5 25pcs
 6x20 20pcs M6 25pcs M6 25pcs



GTY-H8502

Trim Clips Assortment 345Pcs For Peugeot



GTY-H8279

279PCS Metric O-Ring Assortment

Contains 18 popular sizes:
 3x1.5 20pcs 18x3.5 10pcs
 4.4x2.2 20pcs 20x3.5 10pcs
 5x2 18pcs 22x3.5 10pcs
 7x1.5 23pcs 10x2.5 14pcs
 13x1.5 23pcs 11x2.5 13pcs
 10x1.5 23pcs 13x2.5 14pcs
 19x2.5 13pcs 14x2.5 13pcs
 21x2.5 14pcs 16x2.5 14pcs
 22x2.5 13pcs 18x2.5 14pcs



GTY-H8404

404PCS Metric O-Ring Assortment

Material specification: NBR, HNBR, EP, EPDM, SILICON
 Box Color: blue, red, yellow
 Packing: shrinking out of box



GTY-H8501

Trim Clips Assortment 300Pcs For Renault



GTY-H8503

Trim Clips Assortment 308Pcs For Fiat



GTY-H8504

Trim Clips Assortment 350Pcs For Volvo



GTY-H8507

Trim Clips Assortment 408Pcs For Nissan



GTY-H8509

Trim Clips Assortment 370Pcs For Mitsubishi



GTY-H8511

Trim Clips Assortment 415Pcs For Ford



GTY-H8506

Trim Clips Assortment 418Pcs For Honda



GTY-H8508

Trim Clips Assortment 475Pcs For Mazda



GTY-H8510

Trim Clips Assortment 300Pcs For Opel



GTY-H8512

Trim Clips Assortment 290Pcs For BMW



GTY-H8513
Trim Clips Assortment
270Pcs For Mercedes



GTY-H8515
Trim Clips Assortment
160Pcs For Audi



GTY-H8750
750PCS FH Wood Screw
Assortment

Contains 10 popular sizes:
3x12mm200pcs
3x16mm150pcs
3.5x20mm100pcs
4x25mm85pcs
4x30mm85pcs
4x40mm50pcs
4x45mm30pcs
4x50mm20pcs
5x60mm15pcs
5x70mm15pcs



GTY-H3003
Feeler Gauge

Hardened spring steel blades,chrome plated case with rivet.
Size inmm on each blade
75mm long type A blades



GTY-H8514
Trim Clips Assortment
255Pcs For Volkswagen



GTY-H8555
555PCS Cotter Pin
Assortment

Contains6popularsizes:
2.4x38mm100pcs
2.4x25mm150pcs
3.2x50mm50pcs
3.2x25mm75pcs
1.6x25mm150pcs
4.0x64mm30pcs



GTY-H81200
1200PCS Lock Washer
Assortment

Contains 6 popular sizes:
M3300pcs
M4300pcs
M5300pcs
M6150pcs
M8100pcs
M1050pcs



GTY-H3004
Feeler Gauge

Hardened spring steelblades,chrome plated case connect with standard nut.
Size in mm(inch,mm/inch) on each blade.
100mm long 10mm wide type B blades.



GTY-H3005
Feeler Gauge

Hardened spring steel blades,chrome plated case with big locknut.
Size inmm and inch oneachblade
3-5/16" long step-groundblades,allow for precise measurements on clearance, called"GO-NO-GO"feeler gauge.



GTY-H3008
Feeler Gauge

Hardenedspringsteelblades,chromeplated casewithbiglocknut.
Sizeinmmandinchoneachblade
3-5/16"longtypeAbladesandan0.010brassblade.



GTY-H3010
Feeler Gauge

Hardened spring steel blades,chromeplated case,connect withkeyring.
Sizeinmmoneachblade.
12.8mmwidth typeAblades.



GTY-DN0001
Waste Oil Pan

1.Material:HDPEmaterialpolyethylene.
2.Color:black.
3.Shape:Round withhandle.
4.Function:Collectingwastevehicleoil. Letautooilinflowtothepan,makethe environmentclean.
5.Usage:oilfunnel./gasonlineproducts/industrial products.
6.Capacity:10L&15L



GTY-H3006
Feeler Gauge

Hardened spring steel blades,chrome plated case with big lock nut.
Size inmm andinchoneachblade.
4"long offset blades.




GTY-H3009
Feeler Gauge

Hardenedspringsteelblades,chromeplatedcase withbiglocknut.
Sizeinmmandinchoneachblade.
Include12pcs3-5/16"longtypeAsteelbladesand 6pcsbrassblades,2barswith6wiresandan electrodeadjuster.



GTY-D1031
Magnetic Collection Trays



GTY-DN0002
8L Round Waste Oil Pan

1.Material:PP
2.Color:black.
3.Function:Collecting wastevehicleoil. Letautooilinflowtothepan,makethe environment clean
4.Usage:oil funnel./gasonline products/industrial products.



GTY-AN6001
Plastic Funnel

Made of PP
Size:10" & 7-1/2"



GTY-AN6002
Plastic Funnel

Made of PP
Size:4"



GTY-AN6003
2 in1 Plastic Funnel

Made of PP
Size:4"



GTY-AN6004
Long Plastic Funnel

Made of PP
Size:18"



GTY-AN6005
Oil Funnel

Made of PP
Size:10"



GTY-AN6006
4Pieces Plastic Funnel Set

Large funnel:4.8x5.8inch
Middle funnel:4.0x5.0inch
Small funnel:3.0x3.7inch
Mini funnel:2.4x3.0inch



GTY-AN6007
COOLANT FILLING FUNNEL KIT(12PCS)

Specifications:
-Supplied with 5plugs and cover
-245°elbows
-1 straight 127mm extension
-2 rubber sheaths
-Automaticvalve



GTY-AN6008
15PCS No-Spill Coolant Funnel Kit

SetIncludes:
1Funnel
1StorageLid
(2)45°Adapters
1StraightExtension
1Stopper
5Adapters
4Caps



GTY-A8020
Thread Repair Set

The Thread repair kit is used to repair the old damaged thread by using the screw insert which need touse theDrill;ST tap; Inset handle;Break tools for help
1pc HSS ST taps
1pc installation tools
1pc break pin tools
1pc HSS twist drills
1pc hex key
10pcs wire thread inserts
Size:M5X0.8;M6X1.0;M8X1.25;M10X1.0; M10X1.25;M10X1.5;M12X1.25;M12X1.5; M12X1.75;M14X1.25;M14X1.50



GTY-A8021
88PCS Thread Repair Set

3PCS HSS4341 Steel Taps;3PCS Installation Tools;3PCS Break Pin Tool;3PCS HSS4341 Twist Drill;1PC HexKey;75PCS Stainless SteelWire Threads:
M6x1.0x10.8MM(25PCS),
M8x1.25x10.8MM(25PCS),
M10x1.5x13.5MM(25PCS).



GTY-A8022
131PCS Thread Repair Set

5PCS HSS4341 SteelTaps;5PCS Installation Tools;5PCS Break Pin Tool;5PCS HSS4341 Twist Drill;1PC Hex Key;110PCS Stainless Steel Wire Threads:
0M5x0.8x6.7MM(25PCS).
M6x1.0x10.8MM(25PCS).
M8x1.25x10.8MM(25PCS)
M10x1.5x13.5MM(25PCS)
M12x1.75x16.3MM(25PCS)



GTY-A8023
Tire Dement Tool For Tubeless Truck

Color: Yellow
Operation: Manual
Material: Metal
Dement Tires: 17.5" - 24.5"
Total qty: 3 pcs
Type: Tire Changer
Operation: Manual



GTY-H1116
5PCS Screw Extractor Set

For removal of broken screws and studs
Consistof:
#1.1/8"-1/4"3-6mm
#2.1/4"-5/16"6-8mm
#3.5/16"-7/16"8-11mm
#4.7/16"-9/16"11-14mm
#5.9/16"-3/4"14-18mm



GTY-H1117
6PCS Screw Extractor Set

For removal of broken screws and studs
Consistof:
#1.1/8"-1/4"3-6mm
#2.1/4"-5/16"6-8mm
#3.5/16"-7/16"8-11mm
#4.7/16"-9/16"11-14mm
#5.9/16"-3/4"14-18mm
#6.3/4"18-25mm



GTY-HN5005
Pry Hook

* Dual purpose hooking / prying tool.
* Designed to safely pry small bezel components from interiors without damage.
* The universal hook tool features a couple profiles to choose for the particular application you're dealing with.
* It's small enough to be used in those tight spots where the other tools just can't go.



GTY-HN5006
Pry Hook

* Dual purpose hooking / prying tool.
* Designed to safely pry small bezel components from interiors without damage.
* The universal hook tool features a couple profiles to choose for the particular application you're dealing with.
* It's small enough to be used in those tight spots where the other tools just can't go.



GTY-HN5008

Pry Hook


* Dual purpose hooking / prying tool.
 * Designed to safely pry small bezel components from interiors without damage.
 * The universal hook tool features a couple profiles to choose for the particular application you're dealing with.
 * It's small enough to be used in those tight spots where the other tools just can't go.



GTY-HN5009

5PCS Handy Remover Set

Material: impact resistant nylon.
 Set includes five different sizes and styles of tools that allow easy removal of trim fasteners, moldings and wheel hubs.



GTY-HN5011

11PCS Trim Molding Removal Tool Set

Made from impact resistant high quality nylon, it won't be scratch or mar fascia like metal tools can. Designed for removal of door panels, fascia & trim strips, dashboard & interior panels & trim, window moldings etc.



GTY-BJ1001

Plastic Creeper

It's easier to clear the undercarriage of most vehicles with this low profile design. One piece high-impact PVC frame won't rust and is easy to clean. Oil and solvent resistant. Comfortable pillow. 6 smooth-rolling swivel casters. 6 pcs 3" wheels. 2 convenient tool-keeper compartments. Size: 36" & 40"



GTY-HN5008

4PCS Plastic Scrapers Set

Ideal for removal of adhesive weights on aluminum wheels for cars and motorcycles. Also suitable for loosening of bonded protective strips on the body. Width: 19/22/25/38mm



GTY-HN5010

6PCS Trim Molding Removal Tool Set

Made from impact resistant high quality nylon, it won't be scratch or mar fascia like metal tools can. Specially designed with extra slim profile and unique shape for the delicate task of removing small or fine fascia trim, door, electronic seat controls, seat levers, center consoles, air vents, door panels... etc.



GTY-NA1077

27PCS Trim Removal Set

It's easier to clear the undercarriage of most vehicles with this low profile design. With Magnetic Tray. Capacity: 400LBS. Material: PE. Caster size: 3"



GTY-BJ1004

40" Plastic Creeper With Magnetic Tray

It's easier to clear the undercarriage of most vehicles with this low profile design. With Magnetic Tray. Capacity: 400LBS. Material: PE. Caster size: 3"



GTY-BJ1005

40" Plastic Creeper With LED Working Light

It's easier to clear the undercarriage of most vehicles with this low profile design. LED working light. Capacity: 400LBS. Material: PE. Caster size: 3"



GTY-BJ1007

36" Foldable Creeper Seat

car-repair board size: 92X44X12CM
 car-repair seat size: 45X44X38CM
 car-repair board load-bearing: 150KG
 car-repair seat load-bearing: 120KG
 plastic spraying process, SIX2" Omni-directional wheel



GTY-A1135

Pump

Intake and discharge transfers system. Transfers liquids rapidly. Pumps air or any liquid. 2 hoses each 1.3M long.



GTY-A2457

Torque Angle Gauge

Calling for fastener to be tightened after torque load into torque-angle applications. 360 degree scale clearly marked in 2 degree increments and in intervals of 30. Easily zero the gauge by turning housing for every application.



GTY-BJ1006

36" Creeper Seat

Overall size: 920X380X95MM
 Heavy duty 25x25mm square tube frame
 4 support steel tube underneath padding
 4 pcs 360 degree swivel casters (2 inch dia.)
 Thick cushion added head padding for user comfort.
 Easy carry design for user convenience.
 weight capacity: 150KGS



GTY-BJ1008

Creeper Seat

Use the Creeper Seat in your workshop, garage for comfortable work. All steel construction. 300lbs weight capacity. 4 pcs swivel casters for easy movement. With plastic tool tray for easy get tools needed. Product Length: 14.17" (360mm) Product Width: 14.37" (365mm) Product Height: 14.37" (365mm) Padded cushion size: 375x210mm Tool tray size: 360x350mm Caster size: 2 inch



GTY-A1379

Air Bag Removal Tool Kit

7x Air Bag Removal Tool:
 2x A: VW PASSAT B5, POLO, Lupo, AUDI A4, A6, SKODA SUPERB
 2x B: For VW GOLF 4, NEW BEETLE, SEAT, SKODA FABIA, OKTAVIA ABBJ.99
 1x C: For VW GOLF 4, BJ.1998-2004), VW PASSAT ABBJ.1997, BORA ABBJ.1999
 1x D: For VW-MODELLEU. A: PASSAT ABBJ.2000
 1x E: Air bag removal tool used to remove driver air bag from steering wheel on 1999-04 new body style VW PASSAT, JETTA, GOLF & BEETLE



GTY-A8010

Metric Rethreader Set

(1) 21 pcs rethreader dies: 1/4", 5/16", 3/8", 7/16", 1/2"
 (2) 9/16", 5/8" UNF 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8
 (3) UNC 6x1.00, 8x1.25, 10x1.25, 10x1.50, 12x1.25, 12x1.5, 12x1.75mm
 (4) 19 pcs Rethreader tap sizes: 1/4", 5/16", 3/8", 7/16", 1/2", 9/16" UNF 1/4", 5/16", 3/8", 7/16", 1/2", 9/16"
 (5) UNC 6x1.00, 8x1.25, 10x1.25, 10x1.50, 12x1.25, 12x1.5, 12x1.75mm
 Description pitch sizes:
 (1) Sae file: 11, 12, 13, 14, 16, 18, 20 and 24
 (2) Sae file: 9, 10, 12, 16, 20, 27, 28 and 32



GTY-A8049
Fluid Line Clamper

Use five of these tools to clamp each brake line & the master cylinder simultaneously, this allows a speedy overhaul with minimum loss of fluid & subsequent ine bleeding.
Seals flexible brake and fuel lines.
Smooth rounded edges to ensure no.
Damage to the internal reinforcement of hydraulic brake lines.



GTY-AN7048
Fuel Line Disconnect Tool

For Ford sizes: A=3/4", B=5/8", C=1/2", D=3/8"
Easily releases locking couplings on fuel & air conditioning lines.
Fits sizes: E=3/8", F=5/16"
Releases locking couplings on 5/16" and 3/8" fuel lines.



GTY-B1014
Tyre-lever

Material: 45# carbon steel / Mn steel.
Process: drop forged and heat treatment.
Finish: chrome-plated / zinc-plated.
Size: 8", 10", 12", 14", 16", 20", 24"



GTY-BG1030
13PCS Body Pry Bars And Body Wedge Tools Set

These pry bars are manufactured from special steel and are particularly suitable for:
Dismantling stubborn components.
Positioning components.
Holding components in required position.
Spreading clamp-fixtures, etc



GTY-AN5025
2PCS Multipipe Wrenches Set

Heavy duty type
Size: 9-32mm.
Package: Sliding card



GTY-AN7055
4PCS Nut Splitter Set

Splits rusted hex nuts up to 1-1/16" (27mm) across the flats. Flat round head design allows tool to be used in inaccessible areas. Cutting blade and forcing screw head have a ball joint drive to prevent binding under load. Does not damage the bolt threads.
Sizes:
15/16"~1/2" (9~12mm)
1/2"~5/8" (12~16mm)
5/8"~7/8" (16~22mm)
7/2"~11/8" (22~27mm)



GTY-B1054
Rim Protector

Convenient tool while changing the tire with the weight.
Top protect the wheel rims from damage.



GTY-BN7018
Deluxe Tyre Lever

Length: 300mm Width: 28mm
Quality drop forged and tempered alloy steel with flat round tip
Moulded handle enables extra grip
Suitable for use with motorcycle, small agricultural or leisure tyres.



GTY-H1084
60PCS Bit Set

The product is a 60-piece set of batch head sets, the batch head material is S2, and the mat is a magnetic suction mat.



GTY-H1104
14PCS Impact Driver Set

36MM:
PH1, PH2, PH3, PH4
5MM, 6MM, 8MM, 10MM, 12MM
H4, H5, H6, H8



GTY-H1121
Impact Driver Set

36MM: PH2, PH3, PH4(+)
6.5MM, 8MM, 10MM(-)
80MM: PH2, PH3(+)
8MM, 10MM(-)



GTY-H1123
Impact Driver Set

80MM:
PH2, PH3
8MM, 10MM



GTY-H1087
Magnetic Bar Tool Holders

Material: carbon steel;
Including 4 screws.
Size: 8" (200x23x12.5mm)
12" (305x23x12.5mm)
18" (455x23x12.5mm)
24" (605x23x12.5mm)



GTY-H1115
Stud Extractor

Welded body and made from medium carbon steel
Capacity: 1/4" to 3/4", available in metric sizes



GTY-H1122
Impact Driver Set

36MM: PH2, PH3(+)
6.5MM, 8MM(-)
80MM: PH3(+), 8MM(-)




GTY-H2001
Arrow Magnetic Welding Holder

Specification: 3"
Angles: 45°, 90°, 135°
Pull For Ce: 25LBS 50LBS 75LBS



GTY-H2002
Magnetic Welding Holder

Angles:30°,45°,60°,75°,90°,135°
PullForCe:25LBS50LBS75LBS



GTY-H2022
Magnetic Tray

Specialmetalcapwithscrewdesignfor
themiddle magneticto avoid slipping.
Material:stainlesssteel.
With 1pcsofmagnets.



GTY-H2024
Magnetic Holder For
Impact Wrench

Thisisamoveablemagnetictoolholderwithmulti-function
whichispeciallydesignedformotorrepairtools
DesignedtoholdAirImpactWrench/TorqueWrench,and
4pcsImpactSockets(17,19and21mm)theAngleofTorque
Wrenchholdercanbeadjusted.
Size:(H)400mm*(W)94mm*(T)120mm
loadcapacity20LBS



GTY-NA1012
8PCS Adjustable Hook Wrench Set

MATERIAL:CR-MO Steel,Chrome Plated
Including:
Span Diameter(mm):35-60/60-90/90-120
Hook Depth(mm) :2.8/3 /4
HookThickness(mm):5/10/12
Overalllength(inches):175/200/290
PIN SIZE:O7.9*8L,O6*3.8L,O6*7.9L,O5*4L,O4*4L
Features:
Hook type and Pin type to be one wrench.
Ideal for adjusting collars, lock nut rings, and bearings.
Specifically engineered to hold up under the most
rigorous industrial use.



GTY-H2020
Magnetic Tray

Special metalcapwith screwdesignfor
the middle magnetic to avoid slipping.
Material:stainless steel.
Size:150x350MM
Depth:28MM
With 3pcs of magnets



GTY-H2023
Magnetic Tray With Hood

Material:stainlesssteel.
Hood material:Plastic(ABS).
Size:6"(150mm).
Depth:1"(25mm)



GTY-HN7068
3-in-1 Car Mount Phone Holder

ProductFeatures:
Foldable design
Madeofaluminum
Anti-slipbase
Softrubbertoprotectthepaint
Maximumloadcapacityof230kg
Easyinstallation
Fits allcars,trucks,etc.
Dimensions:150x99x99mm



GTY-NA1076
8-piece Hose Locking
pliers Set

Forlockinghosesduringrepairjobs
Preventsspillageandleakageofoperationliquids
Fore.g.brakehoses,airconditioninghoses,
powersteeringhoses
Contains8linestoppers



GTY-NA1098
Lambda Thread Repair
Cutter M18x1.5

Suitableforcleaningandrepairingdamaged
threadsontheexhaustoxygenensorports.
Size:M 18x1.5
3/8"Dr.,for19mmsocketorwrench



GTY-NA1101
Thread Restoring File

Suitablefortherestorationofexternalthreads.
220mmDoubleendfileseachsuppliedwith
reversiblevinylgrip.
Sizeavailable
Imperial:File#1;11,12,13,14,16,18,20,24tpi
Metric:File#2;9,10,12,16,20,27,28,32tpi
Metric:File#1;0.75,1,1.25,1.5,1.75,2,3mmPitch



GTY-NA2301
31PCS Screw Extractor Set

6542/4341HSSLeftHandedDrillBitSet,EasyOut
BoltExtractorSetforRemovingBrokenStripped
ScrewsNutswithSolidStorageCase.
1/8",5/32",3/16",7/32",1/4",9/32",5/16",11/32",
3/8",13/32",7/16",15/32",5/16"(8mm)(10mm)
9/16"(14mm),11/16",3/4"(19mm)
1/4"extractorextension-6.5cm
LeftHandCobaltDrillBit
1/8",5/32",3/16",7/32",1/4",9/32",5/16",11/32"
3/8",13/32"
SpiralScrewExtractor
1#,2#,3#,4#,5#



GTY-NA2303
27-Pieces 3/8" Inch Double
Head Screw Extractor Set

DriveEasyOutBoltRemoverKit,HexHead
Multi-SplineforRemovingStripped,Rounded
Damaged,Broken.
MULTIPLESIZES:These27PCSeasy-out
extractorsetcontains:7/8",27/32",13/16",25/32",
3/4",23/32",11/16",21/32",5/8",19/32",9/16",17/32",
1/2",15/32",7/16",13/32",3/8",11/32",5/16",9/32",
1/4",7/32",3/16",5/32",1/8"



GTY-NA1099
3PCS Hss Tube & Sheet
Drill Set

Made fromhigh speed steel(HSS)
consisting of:4241
1x3-14mm,1x8-20mm,1x16-30.5mm
Forsheetmetals,pipesandplastic,wood etc



GTY-NA1103
Spot Weld Cutter & Drill
Bit Set 9pc 10mm

Suitablefordrillingoutspotweldsonmost
vehiclepanels.
Setincludesreplacementcentrepointsand
cuttercrowns.
Suppliedinmetalstoragecase.
Comeswithmetalcase.



GTY-NA2302
18PCS Nut Extractor Set

3/8"DriveEasyOutBoltExtractorSet,Stripped
BoltRemoverBrokenBoltExtractorKitfor
Damaged,Frozen,RustedLugNuts,Screws
with
SolidStorageCase.
DiverseSizes-18pieces3/8inchdrivenut
boltextractorset.Included16pcsnutextractors:
3/4"(19mm),11/16",17mm,5/8"(16mm),9/16",
14mm,13mm,1/2",12mm,7/16"(11mm),10mm
3/8",9mm,5/16"(8mm),7mm,1/4",
1Pcs1/4"extractorextension(6.5cm)and1Pcs
extractorRod(8cm)



GTY-NA2304
32PCS Screw Extractor Set

EasyOutBoltExtractorSetforRemovingBroken
StrippedScrewsNutswithSolidStorageCase.
Multi-SplineExtractor:1/8",5/32",3/16",7/32",1/4",
9/32",5/16",11/32",3/8",13/32"
1/4"to3/8"Adaptor-6.5cm
1/4"Adaptorforelectricdrill-6cm
1/2"to3/8"Adaptor-4cm
SpiralScrewExtractor:1#,2#,3#,4#,5#
LeftHandCobaltDrillBit:1/8",1/8",5/32",5/32"
7/32",3/16",1/4",9/32",5/16",11/32",3/8",13/32"



GTY-NA2305

49PCS Screw Extractor Set

Large Application-Suitable for removing most damaged, frozen, rusted fasteners including bolts, nuts and screws.
 13 piece bolt nut remover set, size 3/4", 1 1/16", 5/8", 9/16", 1/2", 7/16", 3/8", 5/16", 1/4", 17mm, 13mm, 12mm, 10mm
 extractor extension:
 13 piece screw extractors, size 1/8", 5/32", 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 13/32", 7/16", 15/32", 1/2"
 16 piece drill bit, size 5/64", 7/64", 1/8", 5/32", 3/16", 7/32", 1/4", 9/32", 19/64", 5/16", 11/32", 3/8", 13/32", 7/16", 15/32", 1/2"



GTY-NA2307

5PCS Spiral Extractor Set

Precise chamfered edge design to easily extract damaged bolts, lug nuts and screws in home appliance, vehicle repair and industrial instrument even if they are stripped, damaged, rusted or frozen.
 Diverse Sizes-5 pieces 1/2 inch drive larger sized nuts and bolts. And sockets work on SAE/Metric sizes-3/4" (19mm), 13/16" (20-21mm), 7/8" (22-24mm), 15/16" (24mm), 1" (25.4mm)



GTY-NA2309

12PCS Screw Extractor Set

Multi-spline Extractor:
 1/8", 5/32", 3/16", 7-32", 1/4", 9/32", 5/16", 11/32", 3/8", 13/32"
 3/8" to 1/2" Adaptor-4cm
 1/4" to 3/8" Adapter-6.5cm



GTY-NA2311

10PCS Multi-spline Screw Extractor

Screw Extractor Set are made of chrome molybdenum steel, with high hardness wear resistance and long service life.
 Size: 1/8", 5/32", 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 13/32"



GTY-NA2306

10 Piece Screw Extractor Set And Left-Handed Drill Bit Set

Easy to move and carry. Stripped screw remover comes with a portable storage box that stores the screw extractor and provides good protection. It is also very easy to carry and can provide you with a lot of comfort.
 Screw extractor set: this screw extractor set contains 5 screw extractors in sizes 1#, 2#, 3#, 4#, 5# and 5 left-handed drill bits in sizes 1/8", 5/32", 3/16", 1/4", 19/64"



GTY-NA2308

26PCS Screw Extractor Set

Easy Out Stripped Bolt Remover for Removing Broken Nuts, Bolts, Stripped Screws, Broken Bolt Extractor Kit with Solid Storage Case.
 1/4", 5/16" (8mm), 3/8", 10mm, 7/16" (11mm), 12mm, 1/2", 13mm, 9/16" (14mm), 5/8" (16mm), 17mm, 11/16", 3/4" (19mm)
 Spiral Screw Extractor: 1#, 2#, 3#, 4#, 5#, 6#
 Left Hand Cobalt Drill Bit: 3/32", 1/8", 5/32", 1/4", 9/32", 3/8"
 1/4" Extractor extension-6.5cm



GTY-NA2310

11PCS Spiral Type Deep Extractor Set

Stripped Screw Bolt Remover Socket Kit, For Removing Broken, Damaged, Frozen, Rusted or Chamfered Bolts, Nuts, Screws, Studs.
 MULTIPLE SIZES:
 1/4" (6mm), 5/16" (8mm), 3/8", 7/16" (11mm), 1/2", 9/16" (14mm), 5/8" (16mm), 11/16", 3/4" (19mm).
 Extractor Rod 9cm.
 1/4" Extractor extension 6.5cm



GTY-NA2312

24 Pieces Screwdrivers Pliers Socket Set for Electrician

1/2" Insulated injection socket: 10mm, 11mm, 12mm, 13mm, 14mm, 17mm, 19mm;
 Insulated open end wrench: 10mm, 11mm, 12mm, 13mm, 14mm, 17mm, 18mm;
 Insulated square shape T type handle: 200mm;
 Insulated line man pliers: 200mm;
 Insulated diagonal pliers: 160mm;
 Insulated slotted screwdrivers: 2.5*75mm, 4*100mm, 5.5*125mm, 6.5*150mm,
 Insulated phillips screwdrivers: ph0*60mm, ph1*80mm, ph2*100mm.



GTY-NA2313

10PCS 1000V Electrical Installation Toolkit

Combination Pliers 180mm
 Diagonal Cutting Pliers 160mm
 Long-Nose Pliers 160mm
 Insulation Stripping Pliers 160mm
 Duckbill Pliers 180mm
 Screwdriver SL4x100
 Screwdriver SL5.5x125
 Screwdriver PH1x80
 Screwdriver PH2x100
 Insulation Stripping Knife 160mm



GTY-NA2316

360 Original Attachments 3 Pack Kit

SET OF 3 BRUSHES INCLUDED:
 3 different medium stiffness all purpose bristles.
 High quality twin molded deep set shaft to prevent slippage like other brands, proven and tested.
 2 inch round brush yellow
 4 inch round brush yellow
 4 inch cone brush yellow/black



GTY-NA1081

10PCS Multi Spline Screw Extractor Set

Hex head multi-spline extractors remove broken studs, pipes, screws, Alemite fittings, etc.
 Can be used with hand sockets and wrenches
 Contains sizes from 1/8" to 13/32" or M3.5 to M11
 Detailed size below:
 1/8", 5/32", 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 13/32" or M3.5-M4-M5-M6-M6.5-M7.5-M8-M9-M10-M11



GTY-NA1083

40PCS Glow Plug Removal Kit

6 extractors sockets.
 1x dual size high tensile step drill
 1x narrow pulling unit set
 1x drill holder extension.
 2 xtaps.
 2x drill bits
 2x glow plug chamber cleaning brushes
 For removing damaged and broken glow plugs from cylinder heads.
 Ideal for use where a glow plug has sheared off just below the hex, or flush with the cylinder head.
 Removes 8mm & 10mm glow plugs (M8x1.0 thread or M10x1.0 thread).
 Comprehensive kit includes all necessary adaptors, centering and thread cleaning tools to safely remove the damaged glow plug without damaging the cylinder head.



GTY-NA2314

9PCS 1000V Electrical Installation Toolkit

Screwdriver SL2.5x75
 Screwdriver SL4X100
 Screwdriver SL5.5X125
 Screwdriver PH1x80
 Screwdriver PH2x100
 Voltage Tester
 Combination Pliers 180mm
 Diagonal Cutting Pliers 160mm
 Long-Nose Pliers 160mm



GTY-NA2317

3 Finger Calibrator/Deburring Composite & Plastic Tube

Suitable for pipe outer diameter 16mm/20mm/25mm.



GTY-NA1082

25PCS Multi Spline Screw Extractor Set

Hex head multi-spline extractors remove broken studs, pipes, screws, Alemite fittings, etc.
 Can be used with hand sockets and wrenches
 Contains sizes from 1/8" to 7/8" or M3.5 to M23
 1/8", 5/32", 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 13/32", 7/16", 15/32", 1/2", 17/32", 9/16", 19/32", 5/8", 21/32", 11/16", 23/32", 3/4", 25/32", 13/16", 27/32", 7/8"
 M3.5-M4-M5-M5.5-M6.5-M7.5-M8-M9-M10-M11-M11.5-M12-M13-M14-M14.5-M15.5-M16-M17-M18-M18.5-M19.5-M20-M21-M22-M23



GTY-NA1084

25PCS Screw Extractor/Drill and Guide Kit

Can be used on thread sizes from 3/16" to 9/16" (5mm to 16mm)
 Removes broken fastener without breaking or jamming
 Turns broken fasteners out & permit highest torque without expansion
 HSS drill bits for long service life
 Blow molded case for easy storage and transport



GTY-NA1085

25PCS Screw Extractor/Drill and Guide Kit

Can be used on thread sizes from 3/16 to 9/16" (5mm to 16mm)
Removes broken fastener without breaking or jamming
Turns broken fasteners out & permit highest torque without expansion
HSS drill bits for long service life
Blow molded case for easy storage and transport



GTY-NA1087

10PCS Bolt Extractor Set (Type B)

Great for loosening damaged screws and nuts
The innovative spiral profile digs itself into the head of a damaged screw/nut and thereby allows to loosen it securely
With sizes: 9-10-11-12-13-14-15-16-17-19 mm, 8600
length 27mm Drive by 3/8" ratchet wrench



GTY-NA1089

10PCS Bolt and Screw Extractor Kit

Newly combination of bolt and screw extractor kit help you easily remove off rounded-off, rusted-tight or painted-over bolt and nut, broken studs, pipes, screws, Alemite fittings, etc
Spiral flutes are designed to bite down to provide Max gripping power
Includes:

- 5Pcs Bolt Extractor (14mm & 9/16"), (15mm), (16mm & 5/8"), (17mm & 11/16") and (19mm & 3/4")
- 5Pcs Multi Spline Screw Extractor 1/8", 1/4", 3/8", 1/2" and 3/4"



GTY-NA1086

10 Piece Bolt Extractor Set (Type A)

These screw extractors enable rounded or rusted hexagonal screws and nuts on threaded bolt to be removed
Just attach the necessary extractor screw and turn it anticlockwise with a spanner or wrench
The special moulding catches onto the screw to be removed and loosens it.
With size 9, 10, 11, 12, 13, 14, 15, 16, 17, 19MM



GTY-NA1088

6PCS Twist Socket Set

Design to loosen damaged screws and nuts, innovative spiral profile digs itself into the head of a damaged screw/nut and thereby allows to loosen it safely.
Cr-Mo steel for long life use
Size: 2-3-4-6-8-10mm



GTY-A1015

Valve Spring Compressor Kit

These tools are designed to compress and release valve spring after removing the collets.
Pantograph-type levers ensure a consistent coaxial contact with the valve.
Contents: Driving adaptor 16mm, 19mm, 23mm, 25mm, 30mm.
Length pressure screw 70mm, 110mm, 120mm "C" clamp.



GTY-A6001

Chain Breaker And Riveting Tool Set

Universal application for use on motorcycle drive chains. Set contains all the tooling required for cutting and disassembly of press fitted connecting links
Also for riveting of the connecting pin plate.
Forcing Pins: 3mm, 4mm & 5mm.



GTY-NA1054

2Pcs Lambda Thread Repair Cutter Set

Suitable for cleaning and repairing damaged threads on the exhaust oxygen sensor ports.
Size: M 18 x 1.5 & M 12 x 1.25 mm



GTY-NA2001

Motorcycle Fork Seal Driver Set, 9pcs

Drive Tools, 2-Piece Set: 35/36 - 39 - 41 - 43 - 45 - 46/47 - 48 - 49/50 - 54 mm



GTY-A1029

Angle Driver For Moto Set

This product is a commodity to adjust chiefly and to tune the pilot screw of the carburetor for the motorcycle.
Because the bevel gear is adopted in driving part, the rotation is very smooth easy to use.
Sure grip handle.
Interfaces with bits.
Many of combinations.
Bits size:
(-): 24mm, 28mm, 35mm, 58mm, 95mm
(+): 35mm, 58mm



GTY-NA1005

Chain Breaker & Riveting Tool

Heavy Duty Chain Breaker and Riveting Tool.
For Breaking / Pressing and Riveting Motorcycle Drive Chains - 520. 525. 530. 532
Tool can be secured using a vice or spanner
3. 4. 5mm Pins



GTY-NA2000

Motorcycle Brake Piston Removal Tool

This tool has been designed to drastically reduce the time taken when dismantling motorcycle brakes.



GTY-NA2002

Tool Motorcycle Flywheel Puller

SIZES:
M14 x 1.5
M16 x 1.5
M18 x 1.5
M19 x 1.0
M20 x 1.0 & M27 x 1.25
M22 x 1.0 & M25 x 1.5
M22 x 1.5 & M26 x 1.5
M24 x 1.0 & M27 x 1.0
M26 x 1.0 & M28 x 1.0
M28 x 1.5



GTY-M1001
Clamp Type Chain Breaker

Usage: For disassemble big chain of all kinds motorcycle
Feature: The maraging of critical piece for long life
Package: Pack



GTY-M1003
All-purpose Puller
Combination Motorcycle

Flywheel impact puller with counterweight (6 sizes)



GTY-M1005
Motorcycle water
bottle holder

Motorcycle drink rack/Bicycle electric bike water cup holder water bottle holder



GTY-M1007
Motorcycle turn signal

Amber Color and Flowing Mode, Great for Turn Signal and Indicators Usage



GTY-M1002
Jeep Chrysler
3.0/3.2/3.6 Engine
Timing Tool

Surface of antirust and Parkerizing
Highest hardness use are durable



GTY-M1004
Harley back

Motorcycle accessories Harley Grand Glide Road CVO Glide 09-22 Modified driver backrest mid-backrest



GTY-M1006
Motorcycle kettle
holder accessories

Motorcycle drink rack Bicycle bicycle electric car water cup holder kettle rack modification accessories



GTY-M1008
Yamaha screw stationary
ball accessories

It is suitable for Yamaha MT-03 rear wheel hoist motorcycle modified hoist screw nail fixing parts



GTY-M1009
Motorcycle walkie-
talkie accessories

The IP65 waterproof rating ensures it can withstand harsh weather conditions and provides clear audio communication for motorcyclists.
Easy to install: The product has an easy to install process that makes it easy for users to set up and start using the headphone clip on their motorcycle.



GTY-M1011
Gear die

Off-road motorcycle steel tooth plate
Aluminum alloy tooth plate CNC ladle aluminum sprocket 7075 material
Everfleet KVISKTM



GTY-M1013
motorcycle/bike phone holder

With one-button locking and quick-release design, you can quickly put in or take out your phone with one hand and one second, allowing you to enjoy the freedom of riding.



GTY-M1015
Set of 2 MTB V-brake
screw-on brake pads.

These universal brake pads can be used on many bicycles.
Specifications:
Braking system: V brake
Position: Front or rear
Bike type: City bike, road bike, tour bike
Brake pad length: 70 mm
Brake pad width: 14 mm
Weight per piece: 33 grams
Material: Rubber, aluminum
Color: Black



GTY-M1010
Tire valve nozzle

Durable, leak-free: Easier to lock the stem - no air leaks



GTY-M1012
Bicycle combination kit

Rubber non-slip handle
Suitable for 15mm and 24mm



GTY-M1014
Set of 2 MTB brake pads
with V brake stem.

Built for V-Type and Cantilever bakes, these 70mm brake shoes from Fibrax will provide all the stopping power you need on your mountain bike.

Features:
Post Mount MTB brake shoes
70mm
V-Type / Cantilever



GTY-M1016
Pair of plastic MTB pedals.

14 mm diameter thread with integrated reflectors
Integrated reflectors



GTY-M1017
Numbered spiral
anti-theft device.

Dimensions: diameter
6 mm - Length 1 m.



GTY-M1019
Mini bicycle bell.

Mixed colors



GTY-M1021
Mini pompe.

Longueur 250 mm.
Pour petite et grosse valve.
Avec support de fixation



GTY-M1023
ALUMINUM CAN HOLDE[®]

Unpacked UC weight (in kg): 0.060



GTY-M1018
Spiral lock with
programmable digits.

PVC-coated steel cable.
Dimensions: outside diameter 10 mm -
Length 1.50 m.
programmable code



GTY-M1020
PLASTIC TIRE CHANGERS

Advantage:
Part with shelf hook
Description:
Plastic tire lever



GTY-M1022
Adult metal front basket.

Automatic fastening.
Dimensions : W.34,5 x D.20 x H.26 cm.
Automatic fastening



GTY-M1024
2 trouser clips.

Trouser clamps hold your trouser bottoms in place to
avoid soiling them against your bike's chain if your
bike is not equipped with a chain guard.
The trouser clamps are covered with yellow reflective
material to enhance your safety when cycling at
night.
Yellow reflective material: improves safety at night



GTY-M1025
SPORT HANDLEBARS

For adult bikes



GTY-M1027
Set of 2 26" large
valve inner tubes

Advantage
Set of 2
Description
Set of 2 inner tubes 26" x 1.50 up to 2.00
Large Schrader type valve filmed.



GTY-M1029
9-function wired counter

Benefits
Scrolling functions
9 functions
Description
9 Wired Functions:
Instantaneous speed.
Maximum speed.
Average speed.
Speed comparator.
Daily distance.
Total distance.
Daily travel time.
Time.
Function scrolling.
Battery: AG13.



GTY-M1031
FOOT PUMP MANOMETER

Steel body.
Pressure gauge.
Max. pressure: 11 Bars/160PSI.
Compatible with SCHRADER and PRESTA / DUNLOP
(large and small valves).



GTY-M1026
Gel saddle cover

Advantage:
For more comfort



GTY-M1028
21-FUNCTION WIRED COUNTER

Instantaneous speed.	Stopwatch.
Maximum speed.	Temperature.
Average speed.	Min. temperature.
Speed comparator.	Max. temperature.
Daily distance.	Calories expended.
Total distance.	Fat expended.
Target distance.	Scrolling functions.
Daily time covered.	Maintenance indicator.
Total time covered.	Battery indicator.
Target time covered.	Battery: CR2032.
Time of day.	



GTY-M1030
FRONT + REAR 2 LED
LIGHTING KIT

Front 2 white LEDs / Rear 2 red LEDs.
1 continuous mode / 1 flash mode.
Service life :
Continuous mode up to 130 h.
Flash mode up to 180 h.
Adjustable: Ø from 22mm to 35mm.
CR2032 batteries supplied (x2).
Weight: 15g.
Mixed colors: black,white,blue,red.



GTY-M1032
Cycling gloves size XL

Comfort foam on palm of hand
Velcro wrist fastening
Tongue for easy glove removal



GTY-M1033

**Chain lock with key
90cm x 4mm**

Key lock (2 keys supplied)



GTY-M1034

Spiral key lock d.12mm - l.1,80m

PVC-coated braided steel cable
Outside diameter: 12 mm - Length 1.80M
Key locking system (2 keys supplied)



GTY-M1035

**Rechargeable front/rear
clip-on signal lamp for
bicycles**

Attaches with silicone tie or clips onto pannier or garment
Fixed or flashing light (white or red LED) by pressing the central button in succession.
Press and hold the button to turn the light on or off.
Red and white LEDs flash alternately when battery power is low.
USB charging cable included
Charging time: 2 hours



GTY-M1036

HANDLEBAR PHONE BAG

Dimensions: 19x9.5x8cm
Capacity: 0.6 L
Saddle bag suitable for 6.5" phones
Transparent window on top of the bag (14x8.5 cm) for inserting a smartphone
Protective foam inside the bag
3 Velcro straps for attachment to handlebars



GTY-M1037

Waterproof handlebar phone holder

Pocket dimensions: 18.5 cm x 8.5 cm x 1.5 cm
Clear window dimensions: 13.5 cm x 6.5 cm
100% waterproof With 360° rotating holder for all handlebars



GTY-M1038

Multisport helmet par excellence

12 vents.
Adjustable headband.
EN 1078 approved.



GTY-M1039

Bike helmet Adult

women's style: Head circumference: 52-59cm or 58-61cm
Size: Size: S/M or L/XL
Contains regulator to adjust head circumference size
Air vents: 16
Can be added with insect control net:
None
Is there a sun shield: Yes
Color: Red/Pink
CE Certification



GTY-M1040

Kids helmet

Head circumference: 48-54cm
Size: XS/S
Contains regulator to adjust head circumference size
Air vents: 8
Insect control net: No
Sun shield: None
Color: sky blue/red/coffee



GTY-M1041

Bike wall holder

Easy installation with 2 screws against wall
Size: 26.5x34x20cm



GTY-M1042

Bike wall holder

Bearing weight: 20kg
Net weight: 400g



GTY-M1043

31 pcs Bike tool kit

1x freewheel remover
1x chain rivet extractor
1x chain whip
2x cone wrenches 13/15mm & 14/16mm
4x bits
1x bit holder
3x socket wrenches 8/9/10mm
1x special wrench
1x cartridge BB tool
8x allen keys (1.5/2/2.5/3/4/5/6/8mm)
3x tyre levers
1x adjustable lock ring spanner
1x tube repair kit
1x bottom bracket cup wrench
1x forged spoke adjuster
1x cross spanner, including 1pc freewheel remover and 1pc 8mm hex bolt



GTY-M1044

20 pcs Bike tool kit

1 chain whip
1 bottom bracket tool for Hollow-tech II and other compatible external bearing bottom brackets (outside 45 mm)
1 pedal wrench (15 mm) 1 hex key (8 mm)
1 square drive adapter for 8 mm hex key 6 hex keys (2/2.5/3/4/5/6 mm) 4/5/6 mm keys with round heads
3 tyre levers
1 chain tool (6-10 speed) 1 spoke wrench (sizes 9/10/11/12/13/14 and 2x 15) 1 square drive crank puller
1 crank arm cap/preload bolt tool for Hollowtech II cranksets
1 cassette removal tool for Shimano HG (23.4 mm)
1 Torx wrench (T25) (4.43 mm)
1 tool case



GTY-M1045

37 pcs Bike tool kit

1x freewheel remover
1x chain rivet extractor
1x headset spanner wrench 30/32mm & 36/40mm
1x chain whip
1x tyre pressure strap
2x cone wrenches 13/15mm & 14/16mm
1x open-end wrench 8/10mm
1x Phillips head screwdriver
1x crank arm remover
4x bits
1x bit holder
3x socket wrenches 8/9/10mm
1x L-handle
1x wrench
1x cartridge BB tool
7x allen keys (2/2.5/3/4/5/6/8mm)
3x tyre levers
1x adjustable wrench
1x adjustable lock ring spanner
1x pedal wrench 15/16mm & 15/17mm
1x tube repair kit
1x bottom bracket cup wrench
1x forged spoke adjuster



GTY-M1046

18 pcs Bike tool kit


1x spoke key (to adjust the spoke tension)
1x 7 in 1 multi-function tool with Allen keys and screwdrivers: 6/5/4/3/2mm PH1, S, L, 5mm
1x tube repair kit with glue, patches, metal grater and rubber sleeves
1x open-end wrench 8/10mm chain whip with pedal wrench to secure the cassette, to loosen or tighten the pedals
2x cone wrench 16+14/13+ 15mm 1x Allen key adapter (for use together with the free wheel remover and bottom bracket remover)
1x Allen key
1x Phillips screwdriver PH0
2x crank pullers (different types)
1x freewheel remover
1x bottom bracket remover
3x tyre levers
1x chain rivet extractor (to break the chain)



GTY-M1047

29 pcs Bike tool kit

1/2" adapter for tools with 1/2" fitting
1x Phillips flat-blade screwdriver
1x Small flat-blade screwdriver for rear derailleur adjustment
1x 1/2" sprocket removal tool with 24mm key fitting, incl. guide pin
1x crank installation tool for Hollowtech II crankset
3x Spoke wrench with following openings: 3.2/3.3/3.5mm
1x Crank extractor for ISIS, square and Octalink cranks
1x 1/2" bottom bracket tool with 24mm key fitting for ISIS and Shimano square and Octalink cranks
6x Allen keys: 2/2.5/3/4/5/6mm with ball head
1x Star screwdriver T20/25/30 "L" shape
1x Chain tool with rivet tip suitable for 7/8/9/10- speed, chains and Shimano 11-speed, incl. 9-speed replacement rivet tip in the screw
1 x Puncture repair kit



GTY-M1048

24 pcs Bike tool kit

1x Sprocket removal tool: 7/8/9/10/11-speed (chain whip) 1x Bottom bracket cup tool for Shimano Hollowtech II cranksets
2x cone adjusting tools (wrench opening: 13/15mm and 14/16mm)
1x Chaining bolt tool key for integrated crank extractor
2x long plastic tyre levers
1x 8mm Allen key with 1/2" (12.7mm) adapter for tools with 1/2" (12.7mm) fitting
1x 1/2" adapter for tools with 1/2" fitting
1x 1/2" sprocket removal tool with 24mm key fitting, incl. guide pin
1x crank installation tool for Hollowtech II crankset
3x Spoke wrench with following openings: 3.2/3.3/3.5mm
1x Crank extractor for ISIS square and Octalink cranks
1x 1/2" bottom bracket tool with 24mm key fitting for ISIS and Shimano square and Octalink cranks
6x Allen keys: 2/2.5/3/4/5/6mm with ball head
1x Star screwdriver T20/25/30 shape
1x Chain tool with rivet tip suitable for 7/8/9/10- speed, chains and Shimano 11-speed, incl. 9-speed replacement rivet tip in the screw



GTY-M1049

Bike repair toolset

- 2x Cone wrenches 13/15mm & 14/16mm
- 3 x Tyre lever
- 6 x Allen key 2/2.5/3/4/5/6mm(4/5/6mm with spherical head)
- 1 x Chain rivet tool
- 1x Bike chain plier
- 1x Tyre pressure strap
- 1x Small flat-blade screwdriver for rear derailleur adjustment
- 1x Chaining bolt tool key for integrated crank extractor
- 1x Crank installation tool for Hollowtech II crankset
- 1x Crank extractor for ISIS, square and Octalink cranks
- 1x Star screwdriver T20
- 1x 1/2" sprocket removal tool with 24mm key fitting, incl. guide pin
- 1x 1/2" bottom bracket tool with 24mm key fitting for ISIS and Shimano square and Octalink bottom cranks
- 1x Forged spoke adjuster
- 1x Tyre patches set including (6x selfadhesive repair patches (dia. 25mm), 1x sander)
- 1x 8mm Allen key with 1/2" (12.7mm) adapter for tools with 1/2" (12.7mm) fitting
- 1x 1/2" adapter for tools with 1/2" fitting
- 1x L-handle 4x Sockets: 8-9-10-14mm
- 1 x bearing spanner, e.g. for Hollowtech II, compatible bearing shells
- 1 x chain whip
- 1x aluminum box



GTY-M1051

Mini Bike tool with 16 functions

- With a practical carrying pouch with belt loop
- 1 x cross-tip
- 7 x hexagon sockets: 2/2.5/3/4/5/6/8mm
- 1x slot screwdriver
- 1 x chain tool
- 2 x tyre levers
- 1 x deflating pin
- 1 x spoke spanner
- 1 x T25 torx key
- 1 x chain hook



GTY-M10053

Mini Bike tool with 16 functions

- With a practical carrying pouch with belt loop
- 1 x cross-tip
- 7 x hexagon sockets: 2/2.5/3/4/5/6/8mm
- 1 x slot screwdriver
- 1 x chain tool
- 2 x tyre levers
- 1 x deflating pin
- 1 x spoke spanner
- 1 x T25 torx key
- 1 x chain hook



GTY-M1055

Mini Bike tool with 12 functions

- Folding multi-tool
- 7x hex key 2-2.5-3-4-5-6-8mm(8mm with 4.5mm hole for removing a chain rivet) 1x star T25
- 1x cross-tip screwdriver no. 1
- 1x slot screwdriver 5mm
- 1x spoke spanner 14G and 15G
- 1x brake pad puller/bottle opener/Inner tube repair kit: 1 sander, 6 self-adhesive repair patches(2x rectangular: approx. 32x50mm, 4 round: diameter approx. 25mm)
- 2x plastic tyre levers,
- 1x cleaning cloth approx. 29x29cm



GTY-M1050

Mini Pump

Made from sturdy, lightweight aluminium
Pressure gauge for accurate pressure settings
Fits all standard bike valves (Schrader, Dunlop and Presta valves)
Pump hose swivels 360° - stores on the housing
Sturdy frame bracket
Folding T-handle
Weight: 173g
Rated pressure: 5.5 bar (80 psi), pressure gauge up to 8 bar (120 PSI)



GTY-M1052

Mini Bike tool with 16 functions

- With a practical carrying pouch with belt loop x cross-tip
- 7 x hexagon sockets: 2/2.5/3/4/5/6/8mm
- 1 x slot screwdriver
- 1 x chain tool
- 2 x tyre levers
- 1 x deflating pin
- 1 x spoke spanner 1 x T25 torx key
- 1 x chain hook



GTY-M1054

Mini Bike tool with 16 functions

- 16 functions
- Chrome-vanadium steel tools and hardened steel
- 1x Phillips screwdriver
- 7x hexagon wrench: 2/2.5/3/4/5/6/8 mm
- 1x flat screwdriver
- 1x chain tool
- 1x spoke wrench 14 G
- 1x wrench for screws star T25
- 1x chain hook
- 1x hexagon wrench (flat wrench) 8/9/10



GTY-M1056

Mini Bike tool with 9 functions

- Hex keys: 2/2.5/3/4/5/6/8mm
- PH1
- SL 1.0 x 5mm



GTY-M1057

13 in folding bicycle tool set

- Size:
- 10.5mm-VW Golf ,
- 12.5mm-VW Polo,
- 14.5mm-Polo, Golf, Passat, Audi 80
- 14.0mm-Mercedes Benz-W209C, W209



GTY-M1059

18 in folding bicycle tool set

- Size:
- 7-Hex: 2/2.5/3/4/5/6 /8mm
- 2-screwdriver: +/- 1-chain rivet extractor
- 2-spoke wrench: 14G/15G
- 3-socket: 8/9/10mm
- 6-open wrench: 8/9/10/13/14 /15mm



GTY-M1061

18 in folding bicycle tool set

- Size:
- 7-Hex: 2/2.5/3/4/5/6/8mm
- 2-screwdriver: +/-
- 5-ring wrench: 8/9/10/13/15mm
- 3-spoke wrench: 12/14/15G
- 1-chain rivet extractor



GTY-M1063

11 in folding bicycle tool set

- Size:
- 6-Hex: 2/2.5/3/4/5/6mm
- 2-screwdriver: +/-
- 3-socket: 8/9/10mm



GTY-M1058

15 in folding bicycle tool set

- Size:
- 6-Hex: 2/2.5/3/4/5/6mm
- 2-screwdriver: +/-
- 3-open wrench: 8/10/15mm
- 1-spoke wrench: 14G
- 3-socket: 8/9/10mm



GTY-M1060

17 in folding bicycle tool set

- Size:
- 6-Hex: 2/2.5/3/4/5/6mm
- 2-screwdriver: +/-
- 5-ring wrench: 9/10/12/13/15mm
- 1-socket: 8mm
- 3-spoke wrench: 12/14/15G



GTY-M1062

17 in folding bicycle tool set

- Size:
- 6-Hex: 2/2.5/3/4/5/6/8mm
- 2-screwdriver: +/-
- 3-ring wrench: 8/10/15mm
- 2-spoke wrench: 14/15G
- 1-knife
- 1- bottle opener
- 1-chain rivet extractor



GTY-M1064

16 in folding bicycle tool set

- Size:
- 7-Hex: 2/2.5/3/4/5/6/8mm
- 2-screwdriver: +/-
- 7-wrench: T10/T15/20/25/27/30/P1



GTY-M1065
19 in folding bicycle tool set

Size:
7-Hex:2/2.5/3/4/5/6/8mm
2-screwdriver: +/-
3-ring wrench:8/10/15mm
3-spoke wrench: 12/14/15G
2-tire lever
1- chain hook
1-chain rivet extrator



GTY-M1066
10 in folding bicycle tool set

1x flathead screwdriver
1x phillips screwdriver
6x allen wrench: 2, 2.5, 3, 4, 5 and 6 mm
1x socket wrench 8 mm
1x T25 screwdriver



GTY-M1067
10 in folding bicycle tool set

Size:
5-Hex:2/2.5/3/4/5/6mm
2-screwdriver: +/-



GTY-M1068
Mini Bike tool with 7 functions

Hex key: 2-3-4-5-6mm
PH1
SL1.0x5mm



GTY-M1069
6 in folding bicycle tool set

Size:
4-Hex:3/4/5/6mm
2-screwdriver: +/-



GTY-M1070
9 in folding bicycle tool set

Size:
4-Hex:3/4/5/6mm
2-screwdriver: +/-




GTY-M1071
Mini Bike tool with 17 functions

1x SL screwdriver
7x hexagon sockets:2/2.5/3/4/ 5/6/8mm
1x Phillips screwdriver
1x chain tool
2x tyre levers
1x deflating pin
1x spoke spanner G14-G15
1x T25 torx key
1x tyre file
6x self-adhesive repair patches



GTY-M1072
Screwdriver set 9pcs

6x Hex key: 2/2.5/3/4/5/6 mm
3x Screwdriver: SL5 / PH1 / T25
With a hook
Weight: 135g



GTY-M1073
Screwdriver set 6 pcs

Socket: 5 / 6 / 8 / 9 / 10 / 12 mm
Size: ca. 12.7x4.7x2.8cm
Weight: 349g



GTY-M1074
10 in folding bicycle tool set

Size:
6-Hex:2/2.5/3/4/5/6mm
3-screwdriver: +/-
1-chain rivet extrator



GTY-M1075
Multi-function mini tools

1x phillips screwdriver
1x slot screwdriver
3x sockets 8/9/10mm
1x Torx screwdriver
6x hex key: 1-2-3-4-5-6mm
1x socket wrench
3x open wrench
1x spoke wrench



GTY-M1076
Multi-function mini tools

2/2.5/3/4/5/6/8mm, PH1, SL 1.0x5mm
chain remover, spoke wrench: 14/15G,
open wrench: 8/9/10/13/14/15mm



GTY-M1077
Multi-function mini tools

1x chain tool
8x hex key: 1.5-2-2.5-3-4-5-6-8mm
1x Torx screwdriver
1x PH
1x SL
1x inner hex key 8mm
1x spoke wrench
1x tyre lever



GTY-M1078
Tool kit

Hex key wrench 4/5/6mm 3pcs
Adjustable wrench 6" 1pcs
"Y" box wrench 8/9/10mm, 11/13/14mm 2pcs
Lock Ring Tool 1pcs
Screwdriver with adjustable trom 1pcs
Tire lever 3pcs
Forged "O" spoke adjustable 10/11/12/13/14/15G 1pcs



GTY-M1079
Tool kit

Tire lever 2pcs
15 in folding bicycle tool set
Cold patch repair kit 1set
Pump 1pcs
Dumbbell wrench 6-15mm



GTY-M1080
Tool kit

Include 3/4/5/6mm allen and T25
Torx bits to fit most common bolts on
bike with magnet insert holds tool bits
securely
Torque range: 3-12Nm
Ergonomic handle for easily applying
force to nuts and bolts to their required
torque values
Simple, easy to use torque wrench
allows for correct tightening of
bolts on frame and components to
recommended torque
value for safety and performance



GTY-M1081

Chain whip

Function: Flywheel disassembly, chain maintenance hook and damage measurement
Spoke wrench 10/11/12/13/14/15



GTY-M1083

Tire repair kit

Tire lever 2pcs
Cold patch repair kit 1 set



GTY-M1085

Tire repair kit

Tire lever 2pcs
Cold patch repair kit 1 set



GTY-M1087

Bike tool with bag

Folding multi-tool
7x hex key 2-2.5-3-4-5-6-8mm (8mm with 4.5mm hole for removing a chain rivet)
1x star T25
1x cross-tip screwdriver no. 1
1x slot screwdriver 5mm
1x spoke spanner 14G and 15G
1x brake pad puller/bottle opener
Inner tube repair kit: 1 sander, 6 self-adhesive repair patches (2x rectangular: approx. 32x50mm, 4 round: diameter approx. 25mm)
2x plastic tyre levers
1x cleaning cloth approx. 29x29cm
1x bag



GTY-M1082

Chain whip

1x chain whip



GTY-M1084

Tire repair kit

Tire lever 3pcs
Cold patch repair kit 1 set



GTY-M1086

Tool kit

15 in Folding bicycle tool set 1set
Tire lever 2pcs
Cold patch repair kit 1 set



GTY-M1088

Bike tool with bag

1x cleaning cloth approx. 29x29cm
1x Bike mini tool:
1x SL screwdriver
7x hexagon sockets: 2/2.5/3/4/5/6/8mm
1x Philips screwdriver
1x chain tool
2x tyre levers
1x deflating pin
1x spoke spanner G14-G15
1x T25 torx key
1x tyre file
6x self-adhesive repair patches
1x bag



GTY-M1089

Bike tool with bag

Folding multi-tool:
7x hex key 2-2.5-3-4-5-6-8mm (8mm with 4.5mm hole for removing a chain rivet)
1x star T25
1x cross-tip screwdriver no. 1
1x slot screwdriver 5mm
1x spoke spanner 14G and 15G
1x brake pad puller/bottle opener
6x self-adhesive repair patches dia. 25mm
1x sander
2x plastic tyre levers
1x bag



GTY-M1091

Motorcycle cup accessories

Packing size: 8*7*2.5CM
Material: Aluminum alloy
Double screw weight: 0.063kg
Converter box gauge: 37*29*17CM



GTY-M1093

Honda tooth cover

Model: HONDA MSX125
Purpose: modified small tooth cover
Material: Aluminum alloy



GTY-M1090

Bike tool with bag

1x Chain tool with rivet tip suitable for 7/8/9/10- speed, chains and Shimano 11-speed
1x 1/2" sprocket removal tool with 24mm key fitting, incl. guide pin
1x 8mm Allen key with 1/2" (12.7mm) adapter for tools with 1/2" (12.7mm) fitting
1x 1/2" adapter for tools with 1/2" fitting
1x Chainring bolt tool/key for integrated crank extractor
1x chain whip



GTY-M1092

Bumper bracket accessories

specification
22-32mm small clip
Aluminum alloy material



GTY-M1094

Motorbike brake disc

Model 61 -245mm brake disc
Size: 2.45*2.450.35cm
Weight: 300g



GTY-T1010

Valve Stem Seal Install Tool

Install the engine air valve oil seal and Removal valve stem seals on overhead camshaft engines
 Valve stem seal plier (DN-A1009):
 L: 270mm Diameter: 8mm
 Deep seal driving socket for seals 0.D15.5mm
 6" driver handle
 Adapter for seals 8mm, 9mm
 Suitable for SINOTRUK D12 engines & WEICHAI WP12/WP10/WP13/WD615



GTY-T2110

Oil Pressure Testing Equipment 12pcs

Quick safe and problem free testing of the oil pressure on the engine
 Adaption with oil pressure sensor thread
 Includes shock-proof precision manometer diameter 60.00 mm 0-10 bar
 Flexible tube (L=1.3 m) with anti-kink device, decompression valve and quick coupling
 Includes 10 adaptors
 Replacement washers are available in the set
 Universal usage
 Sturdy design in durable plastic storage case



GTY-T8012

Hydraulic Wheel Hub Truing Tool

Used to true/Correction and repair of out-of-round and deformed wheel hubs.



GTY-T2109

HYDRAULIC TRUCK BRAKE DISC DISMANTLING SET

Specially designed to remove the brake disc which gets stuck caused by rust or dust when changing truck floating brake disc.
 Comes with two 14T hydraulic cylinders operated by a control block at the same time.



GTY-T10044

Universal Valve Spring Compressor

used to compress valve springs or safely dispose of cylinder heads when removing and installing heavy truck
 Material: carbon steel
 Suitable for WEICHAI WP10/12/13/WP10 Engine T615 engines, YC6K10 series engine & SINOTRUK D12.



GTY-T2066

Universal Valve Spring Compressor For Japanese Truck

For removal and installation of valve springs on Japanese truck engines
 suitable for the following truck models:
 Mitsubishi Fuso 3.5 t., Fuso over 15 t.
 Hino 750, Isuzu 180, Isuzu 200
 1 valve clamping bridge
 1 pressure piece
 1 clamping bolt M16 x 2.0 to M14 x 1.5, length 240 mm
 1 clamping bolt M16 x 2.0 to M12 x 1.75, length 240 mm
 1 clamping bolt M16 x 2.0 to M10 x 1.5, length 240 mm
 1 clamping bolt M16 x 2.0 to M10 x 1.25, length 240 mm
 1 clamping bolt M16 x 2.0 to M8 x 1.25, length 240 mm
 1 clamping bolt nut M16 x 2.0



GTY-T2072

HGV Cooling System Pressure Test Kit

The HGV cooling system pressure test kit is specially designed for testing the radiator on trucks.
 Used to test cooling system for leaks.
 includes hand pump, test head.
 Please ensure that the radiator coolant is not hot before operating.
 Application: Deutz engine, Mercedes Benz, Volvo, MAN, Renault, DAF, Iveco, Scania.



GTY-T8014

Pneumatic Grease Nozzle Dredge/Clean

Used to clean grease nozzle dredge by pneumatic power, block removal, butter dredging



GTY-T1109

Ball Joint Extractor 25mm

Special designed to remove the truck ball joint
 Suitable for light trucks and SUV
 Jaw opening: 25 mm



GTY-T8011

Hydraulic Brake Shoe Pin Extractor

used to extract brake shoe pin with hydraulic pump
 Material: carbon steel



GTY-T2060

Sleeve Locating Tube For Groove Nut Sockets

Practical connector system with fixing screw.
 Usable for different groove socket nuts (module systems).
 .Enable stable work position.
 .Prevents slippage of the socket.
 .Extremely robust execution.
 .Change through loosening of the grub screw on the hexagon.



GTY-T8008

Hydraulic Balljoint Separator

used to extract ball joints & bushing with hydraulic pump
 Material: carbon steel
 Opening: 30/37.5mm



GTY-T2108

10 PCS SLOTTED SOCKET SET

The slotted socket set is specially designed for flare nuts on high pressure fuel lines and EGT sensors.
 Contents:
 3/8" Dr. 13, 14, 17 mm 6 PT (straight and offset).
 1/2" Dr. 19, 21 mm 6 PT (straight and offset).



GTY-T8007

Hydraulic Tire Screw Removal Tool

used to remove tire screw with hydraulic pump
 Material: carbon steel



GTY-T2056

Calliper Adjuster Socket

.Special 5 teeth designed to adjust the brake caliper.
 Overall length: 46mm.
 Use with 36mm wrench.
 Material: SCM440.
 *Applicable: most of European trucks, SCANIA, VOLVO...etc



GTY-T8009

Hydraulic Bushing Tool

used to extract truck bushing with hydraulic pump
 Material: carbon steel



GTY-T8010

Front MAN Axle Extractor

used to removal MAN Axle suitable WOHO T7&SITRAK truck
Material:carbon steel



GTY-T2100

HYDRAULIC TRUCK SPLIT PIN REMOVER&INSTALLER

To remove and install split pin by way of hydraulic pressure.
Applicable: Truck of European model! SCANIA, VOLVO ... etc)
Truck or middle lorry ofjapanese model (ISUZU, FUSO, TOYOTA ...etc)
The cylinder capacity will reach 17T when the pump with 10000psi(700lbs) power.



GTY-T2093

TRUCK FAN BEARING BASE SOCKET FOR VOLVO

The Volvo truckfan bearing base sockethasaspecial4-internalstuds design toinstall and remove the fan bearing baseSize:3/4"Dr. x53.8 mm/4 PT.Overall length:46 mm.Application: Volvo trucks.



GTY-T8006

Rear Axle Nut Socket 18 Teeth For HOWO AC16&HDZ469 Axle

Suitable for HDZ469/HOWO AC16
Teeth:18 T
Material: carbon steel
Driver: 1 inch



GTY-T8013

Pneumatic Bushing/ Sleeve Puller

Used to Install &remove suspension bushingAdapter size:Ø69(outer)*Ø58(inner)



GTY-T2088

UNIVERSAL TRUCK BALL JOINT SEPARATOR

Special designed 3 interchangeable jaws to remove ball joint, and tie rod on truck.
Jaws open:25mm,32mm,48mm
Applicable:DAF, Iveco, MAN, Mercedes,Scania,Volvo,etc



GTY-T10043

Bearing Puller

Extractor disassembly of gearbox bearing
The best tool for removing truck transmission bearing. Material: carbon steel
Suitable for CNHTC Hw13710 Transmission, Main auxiliary shaft front bearing 370309Y



GTY-T8004

Axle Nut Socket 20 Teeth For Jiefang A6T/A6E axle

Suitable for JIEFANG A6T/A6E axle input shaft oil seat (axle nut) install & removal
Teeth:20 T
Material: carbon steel
Driver: 1 inch



GTY-T2017

Universal Axle Nut Removal/ installation Kit

Tool loose and tight the rear wheel nut. Both sides of pin are adjustable. To scale the hole in the center and add the wrench. Different sizes of pins are suit to different kinds of cars. Using loosening tightening of the rear housing nuts. Used in small vehicle (over 2 tons for circular nuts.) Function with the same wrench. General truck repair tool. Application range: Pin(mm): 5.5, 6.8, 9.1 Nut(screw): M8xP1.25



GTY-T2071

4Pc Diesel Injector Socket Set 1/2"

The set includes four sockets, each designed to fit a specific type of injector. 1/2in. Dr Socket-72mm long with 4 teeth: This socket fits Mercedes series 401/421. 403/423.LA.A. and 470 trucks. Socket with 32mm outer hexagon -70mm long with 4 teeth and internal thread M14x1.5mm: This socket fits Mercedes, Neoplan, and Setra trucks. 1/2in. Dr socket-120mm long with 3 teeth: This socket fits Mercedes and MAN trucks. Socket with 32mm outer hexagon-120mm long with 4 teeth: This socket fits MAN and Mercedes trucks.



GTY-T2074

Universal Bearing Cup Installer

Universal Bearing Cup Installer is designed to install wheel bearing cups in a wide range of heavy duty axles. Simply adjust and lock the jaws to the cup I.D. slip on the new cup, set it in the bore, and drive it in with a hammer- that's it done. For use on 11,000 lb. to 50,000 lb. capacity axles; Adjusts to fit 3-5/8 to 6-1/2 inch O.D. bearing cups- versatile tool replaces up to 30 individual drivers



GTY-T2019

Truck injector Nozzle Socket

The tool removes and installs diesel injected nozzle. The bottom four corners. Barreled shape. Europe Truck Repair Tool Application range: Man(422.403) enz Truck, Scania.



GTY-T2073

Diesel Fuel injector Tester

Diesel Fuel Pressure Test Kit. Check for leakage, adjust unnatural chattering and calibrate for correct spray patterns with these injector tester diesel tools. Kit includes atable fuel injector flow tester, a 15.5-inch long lever, a semi-transparent fuel cup, and 3 pressure nozzles to fit and test most diesel injectors except common rail style. Included nozzle sizes are R,S, and T with M12 x M12 and M12 x M14 pipes. Heavy-duty pressure gauge measures 0-60M Pa(0-600bar/0-8700 Lbs).



GTY-T8005

Axle Nut Socket 16 Teeth Forjiefang A4C axle(435)

Suitable for JIEFANG A4C axle(435) input shaft oil seat (axle nut) install & removal
Teeth:16 T
Material: carbon steel
Driver: 1inch



GTY-T2070

Universal Axle Extractor For Japanese Truck

The universal axle extractor is designed for all Japanese truck dismantling front and rear axles. Used with 46 mm wrench. Size: φ 259 x 32 mm. Application: Japan trucks Hino, UD, etc



GTY-T2063

Truck Injectors Extractor

The truck injectors extractor is a special injector puller solution for new generation trucks. Application: trucks with injector pump systems or with traditional truck injectors: Volvo, Scania, Mercedes Benz, MAN, Renault, Iveco, etc.



GTY-T10016

Wrench

Used for rotating the camshaft to adjust the position of cylinder No.1.5
Material: Carbon Steel
Suitable for SINOTRUK MC11 engines



GTY-T10004

Cylinder Liner Puller

This tool is designed to quickly remove cylinder liner and reduce damage to the cylinder in the process. It is a great helper for auto repair shop, garage Car maintenance. Material: carbon steel



GTY-T10058

**Oil Filter Wrench
32/36mm**

Used for replacement of MAN engine oil and diesel fuel filter caps/oil filters
Material: pvc
Size: 32/36mm
Driver: 3/8"
Suitable for SINOTRUK MC11/MC07 engines



GTY-T10013

**Crankshaft Front
Oil Seal install Tool**

Used for the installation of crankshaft front oil seal
Material: carbon steel
Suitable for SINOTRUK MC07 engines



GTY-T10037

Oil Seal Install Tool

Used for the installation of fan bracket oil seal
Material: pvc
Suitable for SINOTRUK MC11 engines



GTY-T10061

Injection Rail Blanking Plugs

Used for extractor oil pump gears
Material: copper
Suitable for SINOTRUK MC11 engines
Size: M14*1.5*6pc



GTY-T10012

**Rear Crankshaft
Oil Seal Installer**

Install crankshaft rear oil seal of the engine
Material: Carbon Steel
Suitable for SINOTRUK MC07 engines



GTY-T10011

**Rear Crankshaft
Oil Seal Installer**

Install crankshaft rear oil seal of the engine
Material: Carbon Steel
Suitable for SINOTRUK MC11 engines



GTY-T10010

**Crankshaft Front Oil
Seal Install Tool Kit**

Used for the installation of crankshaft front oil seal
Material: carbon steel
Suitable for SINOTRUK MC11 engines (circular nuts.)
Function with the same wrench.
General truck repair tool.
Application range:
Pin(mm): 5.5, 6.8, 9.1
Nut(screw): M8xP1.25



GTY-T10014

**Oil Pump Bushing
Removal Tool**

Used to extractor oil pump liner
Suitable for SINOTRUK MC11 engines
Must in combination with DN-F2119-3



GTY-T10063

**Injector Return
Flow Tester**

Used for measuring the injector return volume to determine if the injector is good
Material: carbon steel
Gauge Capacity: 0-10mm
Suitable for SINOTRUK MC11 engine



GTY-T10017

**Oil Seal & Bearing
Install Tool**

Used for install 6008, 6306 bearing & shaft oil seal
Material: Carbon Steel
Suitable for SINOTRUK MC07 engines



GTY-T10020

**Universal Valve Spring
Compressor**

used to compress valve springs or safely dispose of cylinder heads when removing and installing heavy truck
Material: carbon steel
Suitable for SINOTRUK MC11 engines



GTY-T10015

**Oil Pump Bushing
Install Tool**

Used for install oil pump liner
Suitable for SINOTRUK MC11 engines



GTY-T10007

**Fuel Injector &
Cylinder Liner Puller**

used to remove injector and Fuel injector inlet pipe
Material: carbon steel
Suitable for SINOTRUK MC11 engines



GTY-T10009

**Ball Bearing Extractor For
Output Shaft Bearing**

Used to pull out the output shaft bearing of the ZF16/12-gear transmission
The best tool for removing truck transmission bearing.
Won't damage the bearing and related parts.
Material: carbon steel
Size: Ø112mm



GTY-T10022

Install Tool For Input Shaft Bearing

Used to install the first shaft (Input shaft) bearing of ZF16-gear transmission
Material: carbon steel
Size: Ø96mm(outer)*350mm(H)



GTY-T10031

Inner Bearing Ring Install Tools

For installing of innerring of front bearing of auxiliary box(output shaft)
Material: Carbon Steel
Size:2110*116mm(H)
Application: zf 12s transmission gear box



GTY-T10023

Install Tool For Bearing,Bushing,Gears

Used to install the spacer,second shaft bearing,and gear on the main shaft of the ZF16-gear transmission
Material: carbon steel
Size: Ø95mm(outer)*352mm(H)



GTY-T10026

Gear Seat&Bearing Extractor

Used to pull out the main shaft gear seat of the ZF16-gear transmission
Material:carbon steel
Size: Ø230mm(outer)*23.5mm(H)
Tips: in conjunction with 3 jaw puller or hydraulic puller



GTY-T10029

Input Shaft Oil Seal Instal Tool

For installing and auxiliary tapping of input shaft oil seal
Material: Carbon Steel



GTY-T10030

Oil Pipeline Install Tool

For mounting of output shaft rear central oil pipeline
Material: Carbon Steel
Application: zf 12s transmission gearbox



GTY-T10021

Install Tool For Auxiliary Shaft Bearing

Used to install the auxiliary shaft bearing of the ZF16/12-gear transmission
Material:carbonsteel
When in combination with F2124-14,F2123-18, This tool is used for extend the bolt to extactorbearings and gears
Size: Ø59mm(outer)*86mm(H)



GTY-T10024

Oil Seal Install Tool

Used to install ZF16/12-gear transmission output shaft oil seal
Material:PVC



GTY-T10032

Position Ring For Output Shaft Rear Bearing Inner Ring

For positioning second shaft rear bearing inner ring
Material: Carbon steel
Size: Ø104-129
Application: zf 12s transmission gear
Tips: in combination with DN-F2124-19



GTY-T10034

Inner Needle Roller Bearing Extractor For Auxiliary Box Front Bearings

For disassembly of inner ring of front bearing of auxiliary box
Material: Carbon Steel
Size: inner dia Ø110*65mm(H)
Application: zf12 stransmission gearbox
Tips: Mustin combination with jaw puller



GTY-T10036

Bearing Extractor For Main Rear Bearing

Used to pull out the main shaft rear bearing of ZF16-gear transmission
The best tool for removing truck transmission bearing.
Won't damage the bearing and related parts.
Material: carbon steel
Size: Ø175-181mm
Application: zf 16s transmission gearbox
Tips: in combination with DN-F2124-18



GTY-T2128

Locating Pin Puller

Used to disassemble the locating pin of the ZF16/12-gear transmission main transmission
Material: carbon steel
Size: M12



GTY-T10033

Bearing Race&Seal Drive Install Tool

For mounting of counter shaft bearing outer ring
Size: Ø89mm
Material: Carbon Steel
Application: zf12 stransmission gearbox



GTY-T10035

Local Pin Puller With Slide Hammer

For disassembly of main box cylindrical pin
Adapter: M10
Material: Carbon Steel
Application: zf12s transmission gearbox



GTY-T10005

Bearing Extractor

Extractor disassembly of first shaft bearing
The best tool for removing truck transmission bearing
Won't damage the bearing and related parts.
Material: carbon steel



GTY-T10002

Transmission Gearbox Support Block

For main shaft fixing and clearance adjustment
Material: Aluminium
Application: zf 12s transmission gearbox



GTY-T10072

Lift For Gearbox

Used to lift the main and auxiliary shafts of ZF16-gear transmission
Material: Aluminium
Application: zf 16 stransmission gearbox



GTY-T10004

Roll Bearing Puller Set

For removing the roller bearings without damage
Particularly sturdy design
Special tool steel
Areas of application: flat roller bearing gearbox e.g.ZF12S



GTY-T10049

Nut Socket 60mm,1"

Use a sliding rod with a sliding head to disassemble the flange nut using an extension rod
Material: carbon steel
Size: 60mm,1"Driver
Suitable for CNHTC Hw13710 Transmission



GTY-T10038

Front Bearing Extractor For Auxiliary Shaft Bearings (NCL307E/42307E)

Disassemble the front bearing of the counter shaft Extractor NCL307E/42307E bearings
Material: carbon steel
Suitable for CNHTC Hw13710 Transmission
Size: Ø46*60mm



GTY-T10003

Shift Slide Bar Fixing Bracket

For auxiliary lifting of first shaft
Material: Aluminium
Application: zf 12 stransmission gearbox
Tips:in combination with DN. F2123-13



GTY-T10040

Gearbox Shaft Puller For CNHTCHW

Extractor disassembly of gearbox shaft bearing
The best tool for removing truck transmissionbearing.
Won't damage the bearing and related parts.
Material: carbon steel
Suitable for CNHTC Hw13710 Transmission



GTY-T10041

Bearing Install Tool For 6213 Bearing

Design to Install the input shaft bearing 6213
Material: carbon steel
Suitable for CNHTC Hw13710 Transmission



GTY-T10042

Bearing Puller

Extractor disassembly of gearbox bearing
The best tool for removing truck transmission bearing.
Material: carbon steel
Suitable for CNHTC HW13710 Transmission, auxiliaryshaft front bearing NCL307E housing extractor
Size: Ø51*130mm



GTY-T10066

Flange Puller

Use a puller to remove the flange
Material: carbon steel
Suitable for CNHTC Hw13710 Transmission



GTY-T10043

Bearing Puller

Extractor disassembly of gearbox bearing
The best tool for removing truck transmission bearing
Material: carbon steel
Suitable for CNHTC HW13710 Transmission, Main auxiliary shaft front bearing 370309Y



GTY-T10008

Cylinder Sleeve Install Tool

Used for installing cylinder sleeves or cylinder liners into cylinder easy
Designed for use on WEICHAJ WP10/12/13&SINOTRUK D12 Engine, Detroit Diesel DD16, DD15, and DD13 engines
Size: M14&M16



GTY-T2030

Front Axle Nut Socket For MANTGA 101-110mm

Sixside drive sw60
*Special robust execution designed to remove the front axle nut
*Made from special steel for high tightening and loosening torque
Size: 3/4"DRx93mm/6PT
Overall length: 80mm
Applicable: MAN TGA FRONT AXLE, V9-82L-01(diskbrake/ABS), etc



GTY-T10039

Bearing Puller

Extractor disassembly of gearbox bearing
The best tool for removing truck transmission bearing.
Material: carbon steel
Suitable for CNHTC Hw13710 Transmission



GTY-T10057

Snap Ring Plier

Remove the clasp with special clasp pliers
Material: carbon steel



GTY-T2023

Clamp Nut Socket For MAN&Mercedes 56mm

For professional loosening and tightening Rectangular form.
Usably with rectangular clamp nuts on the axle stub.
Suitable for exact torque with a 3/4"square drive.
Application range:
DAF, KASSBOHERE/SETRA BENZ and MAN 9 tons strengthen front axle VL5.
BENZ SK front axle VL5/1 D-9, VL5/2 D-9, series BENZ Actros with disc brake and FAUST 9 tons front



GTY-T2003

BENZ Rear Wheel Nut Socket

BENZ Rear Axle Nut Socket, 105-125mm
Internal square drive to DIN 3121 /ISO 1174
Rigid Locating tube.
High accuracy of fit.
Extremely robust execution.
Suitable for high tightening and loosening torque.
Special steel.
Application range: Mercedes Benz Actros Rear axle HL/HL8 (Hypoid), etc.



GTY-T2007

Axle Bearing Extractor For MAN

For replace MAN truck hub bearing and remove the old bearings essential tool.
Turn the screw to remove the bearing.
To be used with wrench.
European truck repair tool.
Application range : change the MAN Truck Hub bearing.
MAN Truck tractor 33460/410/414 with front disc brake bearing.



GTY-T2054

Engine Crank Alignment DAF

Designed to adjust the engine for correct position.
Use with 1/2" drive wrench.
Applicable: XF105,Euro5... etc.



GTY-T2025

MAN&BENZ Drive Axle Nut Socket (DR3/4,H60,6Teeth)

For removing the drive axle nut.
Use the tool to remove the drive shaft nut.
European truck repair tool.
Flat oval form.
Special steel.
Application range: MAN,Mercedes Benz truck.
Driver:3/4" Dr.



GTY-T2014

MAN&BENZ Rear Axle Nut Socket(101mm)

*Internal square drive to DIN 3121 /ISO 1174 .
High accuracy of fit
Extremely robust execution
Suitable for high tightening and loosening torque
Application:
Mercedes Benz and MAN 10+13T Reduction axle Hypoid-and Trailer axle NR7/4,0mnibus 0305 G + 0405G,etc
*Driver:3/4" Dr.



GTY-T2029

Differential Groove Nut Socket For MERCEDES

For disassembly and assembly of the balance gearbox.
Designed for high tightening and loosening torques.
Application: Mercedes-Benz Citaro,EvoBus



GTY-T2004

Front Axle Nut Socket For MAN TGA 93mm

Internal square drive to DIN 3121 /ISO 1174
Six sided drive sw 60.
Optional with sleeve Locating tube.
High accuracy of fit.
Extremely robust execution.
Suitable for high tightening and loosening torque.
Application range:
MAN TGA Front axle,V9-82L-01(Disk brake/ABS),etc



GTY-T2005

Drive Axle Nut Socket For MAN TGA

Internal square drive to DIN 3121 /ISO 1174,
Six sided drive sw 60.
*Optional with sleeve Locating tube.
*High accuracy of fit.
*Extremely robust execution.
*Suitable for hightightening and loosening torque.
*Application range:
MAN TGA 460 drive axle,V9-82L-01(Disk brake/ABS),etc.



GTY-T2026

Transmission Socket For MAN Truck 53mm 4 Point

This special socket removes transmission nut on MAN trucks



GTY-T2009

Front Wheel Hub Installer For MAN

.when MAN axle bearing is stuck due to it's over heat,use this tool with air wrench for labor saver and easier removal.
Use this axle with spanner spin the screw.
*Extremely robust execution.
European truck repair tool.
*Application range: MAN new type truck.



GTY-T2010

Extension tube for MAN TGA Rear Axle-M100*1.5

For the removal and installation of wheel hubs.
Extension tube for the protection of the wheel bearing and threaded bolts.
With knurling and bore for toggle lever
Application range: MAN TGA rear axle e.G.HY 1350



GTY-T2022

Fly Wheel Rotating Tool With One Sprocket(1gears)

Flywheel Rotating Tool with One Sprocket.This tool allows the accurate rotating of the engine for valve setting or other.
Application range:MAN engines D20 ,D25 ,D26 ,D28 Size : 1 gearsx61.5mm(H)x1/2" Dr.



GTY-T2020

Diesel Injection Valve Socket For MAN&Mercedes

.Application Range:MAN 422/403,BENZ Truck,SCANIA.
Remove and install diesel injection valve.
Barreled shape.
.European truck repair tool.



GTY-T2021

Rear Axle Differential Groove Nut Socket For MAN&MERCEDES 113mm

For loosening and tightening rear axle differential groove nuts on MAN and Mercedes-Benz commercial vehicles
For manual operation and impact wrenches
Designed for hightightening and loosening torques
Drive:3/4" Dr.



GTY-T2006

MAN Front Wheel Hub Installer

This special tool enables the installation of the front wheel hub on MAN trucks
There is a special needle roller bearing inside the tool to prevent friction and increase the power for installation



GTY-T2018

Oil Filter Wrench For MAN 136mm 18 PT

MAN Oil Filter Wrench 136mm
1/2" Drive, 18 points, 136mm
Application: MAN 18 to 48 tons truck, series F2000, FE and TGA engine.(406.410.414.460)



GTY-T2028

Rear Groove Axle Nut Socket For Mercedes 123.5mm

For the dismantling and assembly of the rear axle nut.
High accuracy of fit.
Robust execution.
Suitable for high tightening and loosening torque.
Application range: Mercedes Benz Citaro.



GTY-T2015

Crankshaft Alignment Tools For Mercedes&MAN 2 Gears

Crankshaft Alignment Tool
1/2in. Drive with 2 gears Used in conjunction with 1/2in. Dr Ratchet Allows the engine crankshaft position to be manually rotated.
Applicable to :
MAN 12 cylinder engines and Mercedes 6/8 and 10 cylinder engines. Models: 401 | 404 | 407 | 409 | 421 | 424 | 444 | 427 | 447.



GTY-T2011

Wheel Nut Socket For SCANIA(8T)

*Made from special steel and robust execution to remove the axle nut.
*Positive drive of the axle nut.
Any extensive slipping is avoided.
eSpecial profile with 8 external studs.
*Used with impact wrench or torque wrench, for 3/4" spanner.
*Application: Scania 420.



GTY-T2053

Rear Wheel Nut Socket For SCANIA(100mm)

100mm 8 point 3/4" drive socket removes and installs the rear axle nut on Scania rear wheel truck axles



GTY-T2102

TRANSMISSION CLUTCH FRONT MAIN AXLE NUT SOCKET FOR SCANIA

To apply for SCANIA transmission clutch main shaft nut.
Size: 3/4" Dr. 64mm/4PT
Applicable:
SCANIA truck with 10-speed auto-transmission



GTY-T2017

Axle Nut Socket For Mercedes With Guide Band 95mm

Positive drive of the axle nut.
Any extensive slipping is avoided.
Milled out profile.
Can be used with an impact wrench or torque wrench.



GTY-T2050

Wheel shock Absorber Spring Washer Socket For SCANIA

wheel shock absorber spring washer remover



GTY-T2012

Front Wheel Nut Socket For SCANIA(83mm)

*Can be used with an impact wrench or torque wrench.
*Removal and fitting of the axle nuts in front of the brake disc.
*Positive drive of the axle nut. Any extensive slipping is avoided.
*Application Range: SCANIA front axle (e.g. 124L/144L), Series 4 from 96 for vehicles above 16 tons.
*Milled out profile *Robust execution



GTY-T2077

PART OF TRANSMISSION BEARING PULLER FOR SCANIA

Use the part for removing the transmission bearing on SCANIA
Part number: #310
Applicable: SCANIA truck transmission bearing puller



GTY-T2049

SCANIA TRANSMISSION BACK OIL SEAL INSTALLER

Designed to install the transmission oil seal easily and without causing damage. Applicable: SCANIA transmission flange shafts on transmission and rear axle Part no. 1 502 384/1 502 385



GTY-T2105

CRANK SHAFT REAR OIL SEAL INSTALLER FOR SCANIA P, R M10*25L

Special designed to install the crankshaft rear oil seal without damage to the oil seal and related parts. Applicable: SCANIA (114) 340/360/380 P, R series truck. Seal no.: 1433183. Seal size: y140xy160x12L



GTY-T2079

CRANK SHAFT FRONT OIL SEAL INSTALLER For SCANIA P, R

Special designed to install the crankshaft front oil seal without damage to the oil seal and related parts. Applicable: SCANIA PR series truck after 2010. Seal number: 1754911



GTY-T2047

SCANIA CAMSHAFT ROTATOR (Dr. 1/2")

*Designed to rotate the crankshaft when correcting the timing of engine. Use with 1/2" drive wrench. *Applicable: SCANIA after 1996



GTY-T2080

CRANKSHAFT FRONT OIL SEAL INSTALLER FOR SCANIA

Specially designed for installing the crankshaft front oil seal without damage. Applicable: SCANIA (114) 340/360/380 truck. Original number: 1392708.



GTY-T2076

CRANKSHAFT REAR OIL SEAL INSTALLER For SCANIA

Designed to install new oil seal onto crankshaft more easily and safely. Put the tool above the oil seal and hit it to force oil seal into the right place. Applicable: SCANIA 310/320 Oil seal no.: 0366303-R



GTY-T2107

PISTON RING INSTALLER FOR SCANIA 112, 113, 114

Specially designed to install cylinder piston ring.
Cylinder size: φ127mm.
Applicable: SCANIA 112, 113, 114, P340, P360, P380, P400 engine.
Engine code: D511.34, DS11.73, DSC11.12, DSC11.13, DSC11.16, DSC11.17, DSC11.18, DS11.41, DS11.78, DSC11.24, DSC11.27.



GTY-T2106

TRUCK VALVE SPRING COMPRESSOR FOR SCANIA

Specially designed tool for removal and installation of valve spring on car. Fixing screw specifications: M10 x 25L. Applicable: SCANIA 340/360/380 truck



GTY-T2048

Electromagnetic injection Valve Cap Socket For SCANIA 340

*For tightening and loosening the electromagnetic injection valve cap.
*SCANIA GENUINE STOCK NO.: 1529752 8075, 11996603325.016 868.
*Application Range: SCANIA(340) Trailer.



GTY-T2099

TRUCK BRAKE SHOE LINING CALIPER TOOL FOR VOLVO

For the restoration of the drum brake. For opening and fixing the brake shoes retaining spring, and dismantling and assembly of the jaw pins. With drive spindle for continuous opening. Applicable: VOLVO N7, 10, 12; F7, 12, 16; FH12, 16; FL7, 10, E and EC series.



GTY-T2098

HGV SPRING BASE NUT EXTRACTOR/INSTALLER FOR VOLVO

For the removal and installation of HGV cab shock absorbers. For counter holding the piston rod and simultaneous turning of the screw cap. Applicable: VOLVO HGV cab shock absorbers



GTY-T2087

INJECTOR WATERJACKET REMOVER/INSTALLER FOR SCANIA 113,114

Special designed to remove and install injector bush on the car directly. Applicable: SCANIA 113 114 engine.



GTY-T2075

TRUCK ABS SENSOR RING FITTING TOOL FOR VOLVO(FM)

The Volvo truck ABS sensor ring fitting tool is specially designed to install the ABS sensor without damaging the air brake system. Application: Volvo truck. Sensor ring number: 9998558-3.



GTY-T2001

IVECO Axle Nut Socket 105mm

Positive drive of the axle nut. Any extensive slipping is avoided. Milled out profile. Robust execution. Can be used with an impact wrench or torque wrench. Special steel. Application range: Iveco Eurotech Cursor HA, etc



GTY-T2086

KING PIN REMOVER (10 WHEELS) FOR SCANIA

Specially designed for removing the kingpin on SCANIA. Have to use with air impact wrench. Applicable: SCANIA 320/340/360 (10 wheels truck)



GTY-T2082

REAR SPRING WASHER SOCKET FOR VOLVO

The Volvo rear spring washer socket is specially designed to remove and install the leaf spring bolts on the rear wheel shock absorber spring. Size: 3/4" Dr. x 28.5 x 44 mm. Overall length: 60 mm. Application: Volvo rear axle e.g. FH.



GTY-T2078

HUB AXLE BEARING INSTALLER AND REMOVER SET FOR VOLVO FM12

Specially designed to install and remove front hub axle bearing, lifting axle bearing and driving axle bearing. It needs to use with hydraulic press. Applicable: VOLVO FM12/FM. Bearing size: Front axle bearing: y68x125mm. Lifting axle bearing: y58x110mm. Driving axle bearing: y94x148mm



GTY-T2081

DIFFERENTIAL SPINDLE BEARING INSTALLER FOR VOLVO(FM/FH)

The Volvo differential spindle bearing installer is specially designed to install the bearing on the differential spindle easily by hydraulic press. Application: Volvo FH/FM Bearing number: 9996759



GTY-T2083

TIMING GEAR COVER INSTALLER FOR VOLVO TRUCK

The Volvo truck timing gear cover installer is specially designed to fix gear covers. Oil may leak without using this tool. OEM number: 9998389, 9998601 Application: Volvo trucks.



GTY-T2084

HYDRAULIC LIFT CYLINDER SET FOR VOLVO Fm12

The Volvo FM12 hydraulic lift cylinder set is specially designed for removing and installing the oil seal of the hydraulic lift cylinder. Material: SCM 440. Application: Volvo FM12 truck after 2005.



GTY-T2095

HUB AXLE SEAL INSTALLER FOR VOLVO Fm12

Specially designed to install front and rear hub axle oil seal. It can be used directly or with hydraulic press. Applicable: Volvo FM12/FM. New type front oil seal no.: F-566426.H195. New type rear oil seal no.: F-566425.H195/F-800792.28. Old type front inner oil seal no.: 3985463. Old type front outside oil seal size: y98x125x8L. Old type rear inner oil seal no.: 800792A. Old type rear outside oil seal size: y125x148x9.7L.



GTY-T2092

UD DIESEL FUEL FILTER WRENCH FOR VOLVO

The UD, Volvo diesel fuel filter wrench is specially designed for removing the oil filter. Operated with 1/2" Dr. wrench. Application: UD and Volvo full-size trucks Engine type: UD GH11, Gh13.



GTY-T2089

INJECTOR SLEEVE REMOVER/INSTALLER FOR VOLVO FM12

The Volvo FM12 injector sleeve remover/installer is specially designed for removing and installing the injector sleeve. Application: Volvo FM12 trucks VM number: 85104134.



GTY-T2090

INJECTOR SLEEVE REMOVER/INSTALLER FOR VOLVO FM12(CCI)

The Volvo FM12 injector sleeve remover/installer is specially designed for removing and installing the injector sleeve. Application: Volvo FM12 (electronic fuel injection system). VM number: 9986174, 88800387 8880054.



GTY-T2096
SERPENTINE BELT ADJUSTING
TOOL FOR VOLVO Fm12

Specially designed to use on remove and install fan belt when release serpentine. Applicable: VOLVO FM12 380/420/430.



GTY-T2094
CRANKSHAFT REAR OIL SEAL INSTALLER FOR
VOLVO Fm12

The Volvo FM12 crankshaft rear oil seal installer can prevent the rear oil seal from being damaged during installation. Application: Volvo truck FM12(380)(420)(430) year 2000-2007. Oil gear genuine number: 85108352



GTY-T2085
CRANKSHAFT FRONT OIL
SEAL INSTALLER FOR VOLVO
FM

The Volvo FM crankshaft front oil seal installer is specially designed to install the crankshaft front oil seal quickly and easily without getting damage on theseal. Application: Volvo FM truck (D16F) Seal number: 88800021, 9992000.



GTY-T2002
IVECO Axle Nut Socket
110mm

Positive drive of the axle nut. "Any extensive slipping is avoided." "Milled out profile." "Robust execution." "Can be used with an impact wrench or torque wrench." Special steel. Application range: IVECO Eurotech Cursor HA, etc



GTY-T2091
CRANKSHAFT REAR
OIL SEAL INSTALLER FOR VOLVO FM12

Specially designed to install the crankshaft oil seal without damage to the oil seal and related parts. *Applicable: VOLVO FM12 (420, 430, 440). Seal no.: 1543896. VM Number: 9990166, 8880013.



GTY-T2097
OIL COOLER INSTALLER
FOR VOLVO FM 440

Specially designed to install and fix oil cooler. Applicable: VOLVO FM440(D13). VM number: 8880022-1.



GTY-T2067
Front Crankshaft Oil Seal Installer
For ISUZU 3.5 Tons

This tool is specially designed to prevent the oil seal from being damaged when installing it. Oil seal genuine number: BZ4961E Applications: Isuzu Truck 3.5 Tons (4JG2, 4JH7) 110HP/130HP



GTY-T2069
Crankshaft Oil Seal Replacing
Tool For ISUZU

The Isuzu crankshaft oil seal replacing tool is specially designed for replacing the crankshaft oil seals on light trucks. Does not cause any damage to oil seal and its related parts. Application: Isuzu trucks Engine model: 4HF1, 4HG1, 6HH1, 6HK1. Oil seal genuine number: Front=BZ4365E; Rear=BZ4219E



GTY-T2068
Rear Crankshaft Oil Seal Installer
For ISUZU 3.5 Tons

The Isuzu crankshaft rear oil seal installer is specially designed for preventing the oil seal from being damaged during installation. Oil seal genuine number: BZ4962-E, 3-97071561. Application: Isuzu 3.5 tons (4JB1, 4JG2) (130HP/150HP).



GTY-T2059
Axle Nut Socket For IVECO

Six sided drive sw 36. Positive drive of the axle nut. Any extensive slipping is avoided. Milled out profile. Robust execution. Can be used with an impact wrench or torque wrench. Application range: IVECO Euro Cargo, etc.



GTY-T2032
Brake Linkage Adjuster Extractor
For BPW

BPW Brake Linkage Adjuster Extractor. Substantial construction for drawing off firmly sitting BPW brake linkage adjusters. Suitable for older and automatic linkage adjusters. A: maximum clamping width A in mm: 66.5mm B: External width C: 155 C: jaw depth B in mm: 87 D: Height H (mm): 127 wrench size SW in mm: 32 Application range: BPW spindle size mm: M22x1.5 x 90 Max. torque Nm: 280



GTY-T2038
Wheel capsule And
Axle Nut Socket

For clean, easy loosening and tightening of flat oval wheel capsules and axle nuts, e.g. on BPW axles. For the dismantling and assembly of grease capsules on BPW axles. Extremely versatile. Suitable for exact torque with a 3/4" square drive. Ideally suited for very high tightening and loosening torques. For machinery usage.



GTY-T2054
Engine Crank Alignment DAF

Designed to adjust the engine for correct position. Use with 1/2" drive wrench. Applicable: XF105, Euro5... etc.



GTY-T2055
Engine Crank Alignment DAF

Designed to adjust the engine for correct position. Use with 24mm wrench. *Applicable: DAF: CF65, CF75, CF85, F65, F75, F85, F95, XF95 width: 85mm Height: 90mm Gear 040mm



GTY-T2044
Axle Extractor For BPW

used to remove the BPW wheel axles with external thread



GTY-T2037
Axle Extractor For
BPW (M155*3.0)

Used to remove the BPW wheel axles with external thread. Thread: M155*3.0 Inner: 98mm Suitable: Former model of BPW 16 tons truck



GTY-T2034

Rear Hubcap Nut Socket For BPW 12T(109mm)

Suits BPW rear axle hub retaining cap nuts found on later model Japanese commercial trucks, tractors & automotive equipment. Hex Drive: 1" Square Drive. Size: 109mm*8 Point opening. Application: BPW-12 Tons



GTY-T2036

Rear Hubcap Nut Socket For BPW16T(120mm)

Suits BPW rear axle hub retaining cap nuts found on later model Japanese commercial trucks, tractors and automotive equipment. Hex Drive: 1.5/8"(41mm) or 1" Square Drive. Size: 4.3/4"(120mm) 8 Point opening. Application: BPW-16T



GTY-T2057

Axle Hub Nut Socket For SAF Trailers(85mm)

Hub nut socket for SAF Trailer axles HGV Application for SAF axles trailer 36mm Hex Drive 6 point x 85mm Height: 85mm



GTY-T2031

Brake Linkage Adjuster Extractor For HALDEX

Substantial construction for drawing off firmly sitting brake linkage adjuster. Certain stop through ring shaped bearing area. External width C: 155 mm Field of application: Haldex Height H: 127 mm jaw depth Bin mm: 87 mm Max. torque Nm: 280 Nm maximum clamping width A in mm: 65 mm spindle size mm: M22x1.5 x90 wrench size SW in mm: 32 mm



GTY-T2033

Rear Hubcap Nut Socket For BPW 6.5-9T(95mm)

3/4" Drive 95mm oval shaped socket 6.5 to 9 ton BPW rear wheel socket for extracting the rear axle cover. Opening: 95mm Oval Shaped. Drive: 3/4" Square Drive. Overall length: 70mm Application: BPW 6.5-9 Tons



GTY-T2035

Rear Hubcap Nut Socket For BPW 12T(111mm)

Oval shape socket with two flats on the side to suit BPW rear axle hub retaining cap nuts found on later model Japanese commercial trucks, tractors and automotive equipment. Hex Drive: 1.5/8"(41mm) or 1" Square Drive. Size: 4.3/8"(111mm) Across the flats. Application: BPW-12 Tons



GTY-T2058

Axle Hub Nut Socket For SAF(143mm)

Positive drive of the axle nut. Robust execution. Can be used with an impact wrench or torque wrench. Ideally suited for brake restoration working. Forward tension with SW 32mm is at 150 N-m. Angle of rotation 20-30 with SW 46. overall length: 135mm inner: 143mm Application range: SAF Euro axle, etc



GTY-T10015

Engine Wrench

For MC11 engine supercharger maintenance



GTY-T10053

Socket Wrench Tool

remove & install bolt of turbocharger oil interface Material: Carbon Steel Size: 1/2" driver, HEX: 22*78mm Suitable for WEICHA I WP10/12/13 Engine



GTY-T10056

Oil Drain Key Socket

Used to disassemble the oil pan drain bolt. Suitable for WEICHA I WP13, WD615 Engine & SINOTRUK D12 engine



GTY-T10045

Rear Crankshaft Oil Seal Installer

Install crankshaft rear oil seal of the engine Material: Carbon Steel Suitable for WEICHA I WP10 Engine



GTY-T10047

Rear Crankshaft Oil Seal Installer

install crankshaft rear oil seal of the engine Material: Carbon Steel Suitable for WEICHA I WP13/wp12 Engine & SINOTRUK D12 engine



GTY-T10055

Fan Bracket Oil Seal Installer

Fan bracket oil seal installer is designed for mc11 engine development, its simple operation, convenient disassembly, greatly saving labor and material costs.



GTY-T10054

T-Handle Hex Allen Key Wrench

Used to extract double cylinder air compressors Material: carbon steel Size: 8mm Suitable for WEICHA I WP13 Engine



GTY-T10046

Front Crankshaft Oil Seal Installer

Install crankshaft front oil seal of the engine Material: Carbon Steel Suitable for WEICHA I WP10 Engine



GTY-T10048

Front Crankshaft Oil Seal Installer

Install crankshaft front oil seal of the engine Material: Carbon Steel Suitable for WEICHA I WP13/wp12 Engine & SINOTRUK D12 engine

